



FIP INSTALLATION

1. INSERT AND TIGHTEN SWIVEL BASE IN FLOWMETER
2. INSERT FIP IN FLOWMETER
3. TIGHTEN SET SCREWS IN SWIVEL BASE WITH 5/64" HEX KEY

A--Supply
 B--Ground
 C--Signal

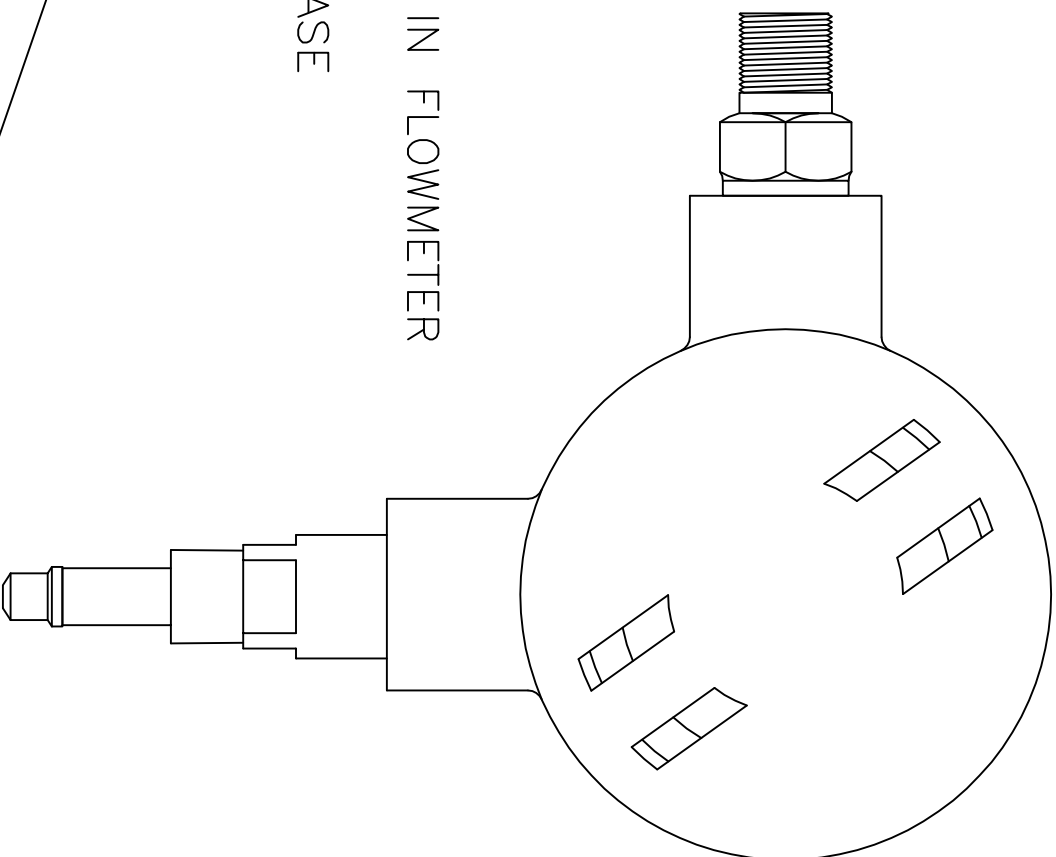

5/64" HEX KEY



PURCHASED PART DRAWING

THIS PRINT, INCLUDING THE INFORMATION CONTAINED IN IT, IS THE PROPERTY OF ANY COMPANY. IT IS CONSIDERED PROPRIETARY IN NATURE AND MAY NOT BE USED OR DISCLOSED OUTSIDE OF ANY COMPANY, EXCEPT UNDER PRIOR WRITTEN AGREEMENT. ANY MODIFICATIONS MADE TO OR COMMENTS WRITTEN ON THIS DRAWING BY UNAUTHORIZED PERSONNEL WILL VOID THIS DRAWING.



AW-LAKE COMPANY
 A TASI GROUP COMPANY

8809 INDUSTRIAL DRIVE
 EPANOKSVILLE, WI 53126
 (414) 884-9800
 FAX: # (414) 884-9810

TITLE: FIP INSTALLATION		PART NUMBER: —	
DRAWING NUMBER: FIPV900B		DRAWN BY: S. HONSBERGER	
DATE: 06/12/07	REV: B	SCALE: NONE	CHECKED BY: C.H.
PAGE: 1	OF: 1		