

## **DATA LOGGERS**

Simple Logger® II TRMS Clamp-On Current





# **Model CL601**







#### **►** SPECIFICATIONS

| MODEL                 | CL601   |  |
|-----------------------|---|--|
| ELECTRICAL            |   |  |
| Channels              | One   |  |
| Input                 | Split CT – AC Current   |  |
| Measurement Range     | 0 to 600Aac   |  |
| Resolution            | 0.1A  |  |
| Accuracy (50/60Hz)    | 0 to 5A: unspecified<br>5 to 50A: ±(1% of Reading + 1A)<br>50 to 400A: ±(1% of Reading + 0.5A)<br>400 to 600A: ±(3% of Reading + 1A)          |  |
| Sample Rate           | 64 samples/cycle  |  |
| Storage Rate          | Programmable from 8 every second to 1 every day   |  |
| Storage Modes         | Start/Stop, FIFO, Extended Recording Mode (XRM <sup>™</sup> )* and Alarm  |  |
| Recording Length      | 15 minutes to 8 weeks, programmable using DataView®   |  |
| Memory                | 240,000 measurements (512KB) - The recorded data is stored in non-volatile memory and will be retained even if the battery is low or removed. |  |
| Communication         | USB 2.0 optically isolated  |  |
| Power Source          | 2 x 1.5V AA-cell Alkaline batteries (included)  |  |
| Battery Life          | 100 hours to >45 days (dependent on sample rate and recording length)   |  |
| MECHANICAL            |   |  |
| Dimensions            | 9.25 x 4.0 x 1.63" (235 x 102 x 41mm)   |  |
| Max Conductor Size    | 1 conductor - Ø 1.42" (36mm)<br>2 conductor - Ø 1.00" (25mm) ea   |  |
| Weight (with battery) | 17.1 oz (485g)  |  |
| Case                  | UL94-V0   |  |
| Vibration             | IEC 68-2-6 (1.5mm, 10 to 55Hz)  |  |
| Shock                 | IEC 68-2-27 (30G)   |  |
| Drop                  | IEC 68-2-32 (1m)  |  |

## \*Extended Recording Mode (XRM™)

This unique recording mode provides the opportunity to continuously record over long periods of time by reducing the stored samples of the oldest data and maintaining matching resolution for the newest data. Each time the memory fills up using XRM™ every other of the oldest stored samples is discarded making room for newer samples. This process continues until the recording is manually stopped.















### **▶** FEATURES

- 0 to 600Arms
- True RMS measurements
- · Self contained, no exposed connections
- Overload indication
- Optically isolated USB 2.0 communication cable included
- One button operation
- Alarm function
- 5 LED indicators quickly and clearly display logger status
- · Powered by standard Alkaline batteries
- Includes FREE DataView® software for data storage, real-time display, analysis and report generation
- EN 61010-1; 300V CAT IV, 600V CAT III

#### **►** APPLICATIONS

- Machine load monitoring
- HVAC troubleshooting
- Load profiling
- · Electrical troubleshooting
- Start-Stop time stamping

| CATALOC NO  | DECCRIPTION |
|-------------|-------------|
| CATALOG NO. | DESCRIPTION |

2126.01


Simple Logger® II Model CL601 (1-Channel, TRMS, Clamp-On, 0 to 600Aac, DataView® software)




# Data View ®

# **Data Analysis and Reporting Software**


# Typical DataView® Functional Displays



Quick and simple configuration of all functions and settings from one dialog box.




Configure scale functions.



Configure all alarm functions with straightforward selections.

## **Configure all data logger functions**

- Display and analyze real-time data on your PC
- Configure all data logger functions and parameters from your PC including sample rate, recording length, channel configuration and more
- Create and store a complete library of configurations that can be uploaded to the logger as needed
- Zoom in and out and pan through sections of the graph to analyze the data
- Download, display and analyze recorded data
- Display waveforms, trend graphs, harmonics (AC models) and text summaries
- Create custom views and reports
- Print reports using standard or custom templates you design
- Free software upgrades are available on our website www.aemc.com

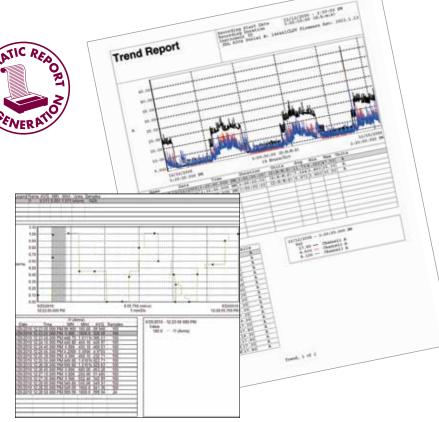

Real-time display of all active inputs on computer through DataView® software.

