

DESCRIPTION

The 7500P Mag Meter is a successful combination of the most advanced electromagnetic flow metering technology with the simplicity and ruggedness of proven batching systems for industrial applications.

Based on Faraday's Law of electromagnetic induction, the 7500P Mag Meter can accurately measure and control most of the batching needs in the industrial market. The completely open cross-section flow tube design with no moving parts makes this meter the ideal device for batching of a wide range of industrial fluids including concrete process water applications.


Where other metering technologies fail due to the presence of solids in suspension in the process water, the 7500P is designed to perform for many years of trouble-free operation with an accuracy of $\pm 0.5\%$ or better.

The built-in *Pulse Scaler* features easy-to-use rotary switches for batch accuracy compensation, making the 7500P the most straightforward metering system available in the industry.

OPERATION

The 7500P Mag meter is a stainless steel flow tube with an internal isolating lining. Two electromagnetic coils are located outside the flow tube, diametrically opposed to each other and protected by a carbon steel housing. Two electrodes, inserted into the flow tube, are positioned "flush" with the internal diameter of the tube and perpendicular to the coils. The coils are energized by a pulsed DC voltage provided by the electronic converter, and a magnetic field is generated across the flow tube section. According to Faraday's law, when this magnetic field is "cut" by the conductive liquid flowing through the meter, a voltage is generated in the liquid. This voltage is directly proportional to the liquid flow velocity, and therefore to the actual volumetric flow rate of the liquid. The electronic converter measures this voltage, processes the signal, and provides two digital pulse outputs, scalable to the desired volumetric value. These digital pulse outputs can be connected to a batch controller, a totalizer display unit for monitoring purposes, or to both devices simultaneously.

Operation of the 7500P is not affected by a moderate presence of most suspended solids in the liquid. Variations of liquid temperature, viscosity or density have no influence in its principle of operation. A set of convenient, field proven pulse scaler rotary switches are provided for easy and straight-forward batch accuracy compensation.

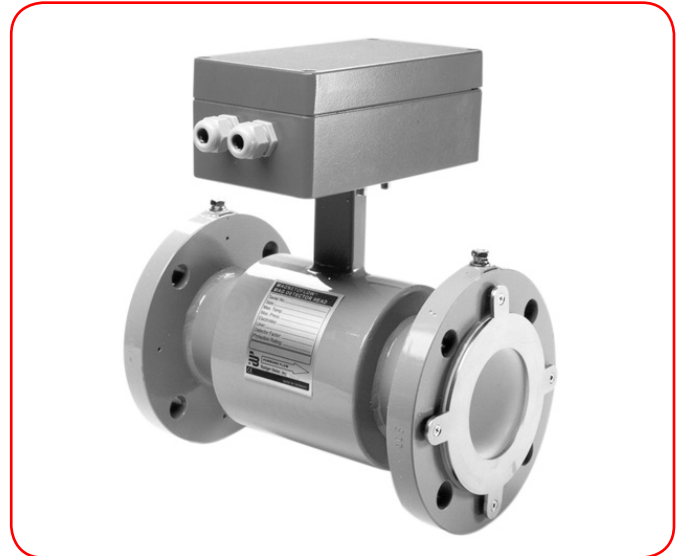


FEATURES

- Unaffected by the presence of most suspended solids in the liquid.
- Open cross-section design: no pressure loss, no moving parts, no maintenance required.
- Pulsed DC magnetic field for maximum zero point stability.
- Rugged, Surface Mount technology electronics for reliable, long life operation.
- NEMA 4 standard enclosure.
- Two standard pulse outputs: solid state relay and open collector output, compatible with most of existing Batch Controllers and/or Totalizer Displays.
- Standard $\pm 0.5\%$ of rate accuracy.
- $\pm 0.2\%$ repeatability.
- Built-in rotary switches for easy batch accuracy compensation.

SPECIFICATIONS

| Detector | |
|-----------------------------|--|
| Working Pressure | 150 psi (10 bar) |
| End Connections | ANSI 150# carbon steel flanges |
| Flow Tube Material | AISI 316 stainless steel |
| Housing and Flange Material | Carbon steel, enamel paint finishing |
| Liner Material | PTFE |
| Electrode Material | Alloy C |
| Maximum Liquid Temperature | 212° F (100° C) |
| Amplifier | |
| Power Supply | 110 V AC \pm 10%, 5 VA |
| Coil Excitation | Pulsed DC, 7.5 Hz |
| Minimum Liquid Conductivity | 5 micromhos/cm |
| Maximum Output Frequency | 10 khz |
| System Accuracy | \pm 0.5% of rate |
| Repeatability | \pm 0.2% |
| Enclosure | Powder coated cast aluminum, NEMA 4 |
| Mounting | Meter mounted only |
| Environmental | -4...122° F (-20...50° C) |
| Output 1 | Solid state relay up to 230V, 500 mA |
| Output 2 | Opto-isolated open collector, 50 mA @ 24V DC |
| Flow Direction | Unidirectional |
| Pulse Width | 50% duty cycle |
| Cable Connections | Two 1/2 in. NPT cord grip |

DIMENSIONS

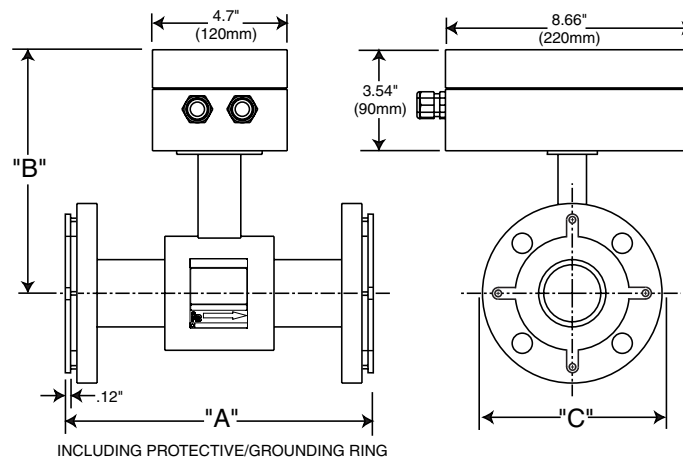

| Meter Size | A in. (mm) | B in. (mm) | C in. (mm) | Flow Ranges gpm (lpm) | |
|------------|---------------|---------------|---------------|--------------------------|-------------|
| | | | | min. | max. |
| 1/2 in. | 6.9 (175) | 8.1 (207) | 3.5 (89) | 1 (3.8) | 20 (76) |
| 1 in. | 9.1 (231) | 8.1 (207) | 4.3 (108) | 3 (11.4) | 80 (303) |
| 2 in. | 10 (254) | 9.1 (232) | 6 (152) | 10 (37.9) | 320 (1211) |
| 3 in. | 12 (305) | 9.8 (250) | 7.5 (191) | 22 (83.3) | 690 (2612) |
| 4 in. | 14 (356) | 10.1 (257) | 9 (229) | 40 (151.4) | 1300 (4921) |

Control. Manage. Optimize.

M-SERIES is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2014 Badger Meter, Inc. All rights reserved.

www.badgermeter.com

The Americas | Badger Meter | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400
 México | Badger Meter de las Americas, S.A. de C.V. | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882
 Europe, Middle East and Africa | Badger Meter Europa GmbH | Nurtlinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0
 Europe, Middle East Branch Office | Badger Meter Europe | PO Box 341442 | Dubai Silicon Oasis, Head Quarter Building, Wing C, Office #C209 | Dubai / UAE | +971-4-371 2503
 Czech Republic | Badger Meter Czech Republic s.r.o. | Mařikova 2082/26 | 621 00 Brno, Czech Republic | +420-5-41420411
 Slovakia | Badger Meter Slovakia s.r.o. | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01
 Asia Pacific | Badger Meter | 80 Marine Parade Rd | 21-06 Parkway Parade | Singapore 449269 | +65-63464836
 China | Badger Meter | 7-1202 | 99 Hangzhong Road | Minhang District | Shanghai | China 201101 | +86-21-5763 5412