



The Signet 2580 FlowtraMag is a full-bore plastic in-line style magnetic flow meter. The PVC body with titanium electrodes has no moving parts, and is two to three times lighter in weight compared to traditional metal magmeters on the market. It is designed for high accuracy flow measurement in short pipe runs, making it an ideal solution for industrial applications where performance and simplicity are important.

The FlowtraMag design is factory calibrated with certificate at $\pm 1\%$ of reading accuracy. It is offered in corrosion resistant materials to provide long-term reliability with minimal maintenance costs. The LED indicators show at-a-glance system status, including normal operation, zero flow and partially filled pipe detection.

The flow meter provides three different outputs; field selectable frequency or digital (S³L) as well as analog 4 to 20 mA. The FlowtraMag is capable of temperature readings of the media using the Signet 0252 Configuration Tool or GF Config Tool Bluetooth® app. The GF Config Tool Bluetooth® app supports iOS and Android for simple on-the-fly user configuration.

These versatile, easy-to-install meters deliver accurate flow measurement in pipe sizes of 1", 2" and 4", optimized for performance in short pipe runs often associated with final effluent lines, well heads and water treatment skids.

Features

- No moving parts
- Lighter in weight compared to traditional metal magmeters
- Reduced straight run requirements, ideal for final effluent lines, wellheads and skids
- Factory calibrated with certificate ($\pm 1\%$ of reading accuracy)
- Partially filled pipe detection status indicator
- Visual LED indicators make sensor status clear and easy to read
- Reverse flow direction configurable with 0252 Configuration Tool or GF Config Tool Bluetooth® App
- Capable of temperature readings of the media using the 0252 Configuration Tool or GF Config Tool Bluetooth® App
- One device with three different outputs: field selectable Frequency or Digital (S³L), and analog 4 to 20 mA
- On-the-fly configuration with GF Config Tool Bluetooth® App
- Bluetooth® 4.2 capable, support iOS and Android for simple user configuration



Applications

- Chemical Processing/Production
- Cooling Tower
- Filtration Systems
- Water and Wastewater Treatment
- Municipal and Industrial Water Distribution
- Pool and Aquatics
- Process Control, Water Process Flow
- Reverse Osmosis
- Scrubber Systems
- Metal Recovery and Landfill Leachate
- Mining




Specifications


General		
Pipe Size Range	1 in., 2 in., 4 in. (ASTM only)	
Flow Range	0.02 to 10 m/s	0.07 to 33 ft/s
3-2580-P-T-010	0.53 LPM to 266.35 LPM	0.14 to 70.36 GPM
3-2580-P-T-020	2.23 LPM to 1112.60 LPM	0.59 to 293.92 GPM
3-2580-P-T-040	8.72 LPM to 4357.83 LPM	2.30 to 1151.22 GPM
Minimum Conductivity	20 µS/cm – water based	
Power Cable Wire	7.6 m (25 ft) 2-conductor shielded	
Output Cable Wire	7.6 m (25 ft) 5-conductor shielded	
Cable wires may be extended up to 305 m (1000 ft), special order only		
Wetted Materials		
Flow Tube Body	PVC	
Electrode	Titanium	
O-rings	FKM seal	
Performance		
Accuracy	± 1% of reading plus ± 0.01 m/s (0.033 ft/s), reference condition 50 µS/cm and water based	
Repeatability	± 0.5% of reading @ 25 °C (77 °F)	
Low Flow Cutoff	0.02 m/s (0.07 ft/s) (adjustable via 0252 Configuration Tool or GF Config Tool App)	
Electrical		
DC Power (Functional Rating)	24 VDC, max 24 W (12 to 32 VDC)	
Reverse Polarity Protected	Up to 35 VDC	
Over-Voltage Maximum Rating	35 VDC	
Current Output		
Passive (low power)	4 to 20 mA per ANSI-ISA 50.00.01 Class H	
Active Output	4 to 20 mA	
Passive Loop Voltage	12 to 32 VDC	
Loop Accuracy	±32 µA (@ 25 °C @ 24 VDC)	
Loop Resolution	5 µA	
Loop Span	3.8 mA to 21 mA	
Error Condition	None, 3.6 mA or 22 mA	
Max. Cable	300 m (1000 ft)	
Max. Loop Resistance	600 Ω @ 24 VDC	
	Compatible with PLC, PC or similar equipment	
Frequency Output		
Frequency	5 to 24 VDC, 50 mA max.	
Frequency Range	0 to 1500 Hz	
Max. Pull-up Voltage	30 VDC, 10k pull-up recommended	
	Compatible with Signet 8900, 9900, 9950, and 0486 Profibus Concentrator	
Digital (S³L) Output		
Digital (S³L)	4.5 to 5.5 VDC	
	Serial ASCII, TTL level 9600 bps Compatible with Signet 8900, 9900, 9950 and 0486 Profibus Concentrator	
Max. Cable Length	Application dependent	
Environmental Requirements		
Enclosure	NEMA 4X / IP65	
Relative Humidity	0 to 95% non-condensing	
Storage Temperature	-10 °C to 60 °C (14 °F to 140 °F)	
Operating Temperature		
	Ambient	-10 °C to 60 °C 14 °F to 140 °F
	Media	0 °C to 60 °C 32 °F to 140 °F
UL Environmental Rating	UL 50, Type 6P Storage	
Altitude	4,000 m	13,123 ft
Pressure/Temperature Ratings		
Maximum Operating Pressure	10 bar @ 23 °C (145 psi @ 73 °F)	
1" and 2"	3.5 bar @ 60 °C (51 psi @ 140 °F)	
4"	2.27 bar @ 60 °C (33 psi @ 140 °F)	
Shipping Weight		
3-2580-P-T-010	3.4 kg	7.5 lbs
3-2580-P-T-020	4.46 kg	9.83 lbs
3-2580-P-T-040	8.3 kg	18.28 lbs
Standards and Approvals		
	CE, FCC, NSF pending	
	UL, CUL Recognized Component	
	RoHS compliant, China RoHS	
	Manufactured under ISO 9001 for Quality, ISO 14001 for Environmental Management and OHSAS 18001 for Occupational Health and Safety.	

Dimensions


1 in.

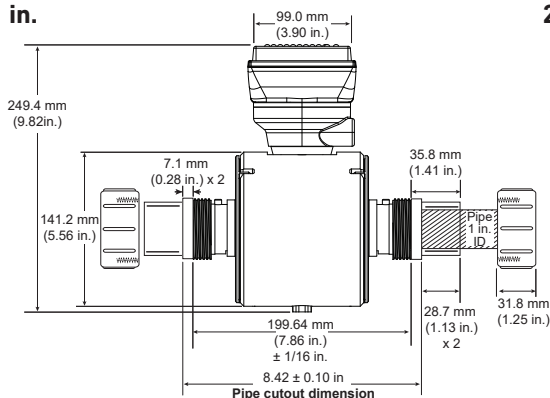



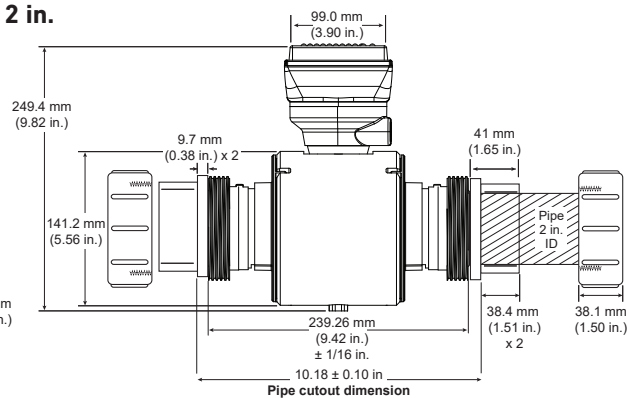


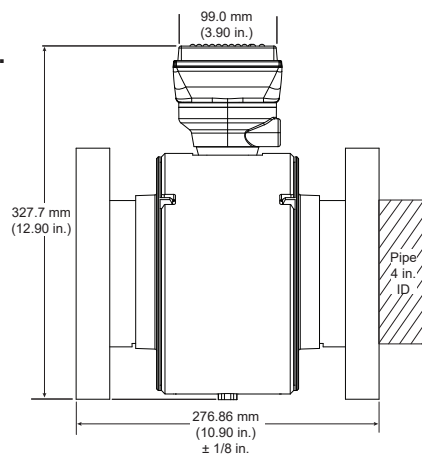


2 in.



4 in.




System Overview

Stand-Alone	Panel Mount	Pipe, Tank, Wall Mount	4 to 20 Output	Automation System
Signet Model 2580 FlowtraMag 	Signet Instruments 8900 9950 9900 9900-1BC 	Signet Instruments 9900-1P 9900-1BC with Rear Enclosure 	Customer Supplied Chart Recorder, Programmable Logic Controller or Programmable Automation Controller 	0486 Profibus Concentrator and Customer Supplied Programmable Logic Controller or Programmable Automation Controller 
	Signet Model 2580 FlowtraMag 3-2580-P-T-010 	3-2580-P-T-020 	3-2580-P-T-040 	


Temperature/Pressure Graph

Note:

The pressure/temperature graphs are specifically for the Signet sensor. During system design the specifications of all components must be considered. In the case of a metal piping system, a plastic sensor will reduce the system specification.

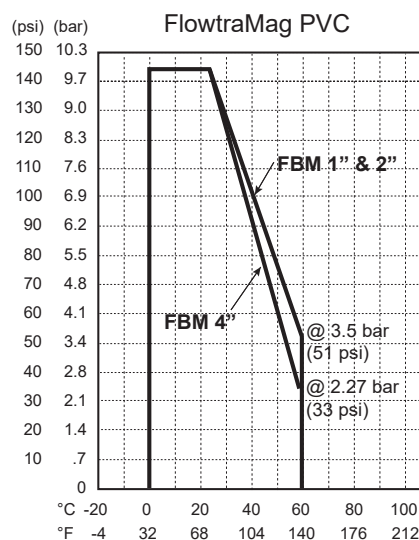

Ordering Information

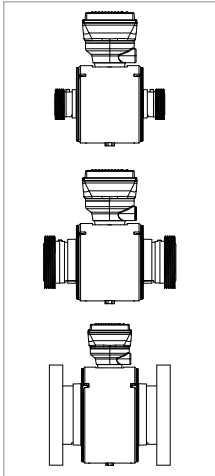

Mfr. Part No.	Code	Description
3-2580-P-T-010	159 001 874	FlowtraMag Blind, PVC Union, FKM (1 in.)
3-2580-P-T-020	159 001 875	FlowtraMag Blind, PVC Union, FKM (2 in.)
3-2580-P-T-040	159 001 876	FlowtraMag Blind, PVC Flange, FKM (4 in.)

Accessories and Replacement Parts

Mfr. Part No.	Code	Description
3-0252	159 001 808	Configuration Tool
854-040	-	4 inch SCH 80 Van Stone Flange
37X002009	-	4 inch EPDM Full Face Flange Gasket - 150# ANSI bolt pattern
37X002118	-	4 inch FKM Full Face Flange Gasket - 150# ANSI bolt pattern
37Z000069	-	4 inch Van Stone Flange bolt kit 316 SS - 150# (UNC bolts, SAE washers and nuts)