

CS54

Non-Incendive Differential Pressure Transducer

FEATURES

- Differential pressures from 0.5 PSID up to 1,000 PSID
- Line pressures up to 1,000 PSI
- Bi-directional pressure ranges available
- Wet/Wet

APPROVALS/CERTIFICATIONS

- CSA Class I, Division 2 Groups A, B, C, D T4
- ANSI/UL 122701 Single Seal
- CE

GREAT FOR....

- Filtration
- Cryogenic bulk tank level measurement
- Compression systems
- Test stands



About the CS54

The **CS54 Non-Incendive Differential Pressure Transducer** is a high strength sensor designed for differential pressure measurements of liquids and gases in Class I, Division 2 hazardous locations. A 316L SS oil-filled media isolated sensor element provides excellent stability over a wide operating temperature range while offering corrosion resistance against various liquids and gases. Differential pressure ranges up to 1,000 PSI are available with 1/4" MNPT or FNPT process connections.



Available With A Turck Minifast Connection

In an effort to simplify installation in Class I, Division 2 hazardous locations, the **CS54 Non-Incendive Differential Pressure Transducer** is offered with an integral Turck Minifast electrical connection.

When combined with a CSA Division 2 approved Turck cordset and a Turck Lokfast Guard, **there is no requirement for conduit to be installed over the cable***. This not only makes installation easy but also makes switching out sensors less cumbersome. Core Sensors can supply all components as a complete package.

*Core Sensors recommends confirming hazardous location installation requirements with your local inspector as each installation is unique.

SPECIFICATIONS

Performance

Accuracy @ 25°C:*	≤ ± 0.25% BFSL ≤ ± 0.5% BFSL (2 PSI & below)
Stability (1 Year):	≤ ±0.25% of FS
Pressure Cycles:	4 million
Max Line Pressure:**	1,000 PSI
Max Differential Pressure:	1,000 PSI
Overpressure:***	2X or 2,000 PSI, whichever is less, configured differential pressure
Burst Pressure:***	3X configured differential pressure

* Accuracy includes non-linearity, hysteresis and non-repeatability

** Max line pressure is the highest common mode pressure that can be applied to the sensor without damage.

*** Overpressure and burst pressure are the maximum differential pressure that can be applied to the high or low side before damage to the sensor will occur.

Thermal

Operating Temperature:	-40 to +80°C
Operating Temperature: (Electrical Connection "F", EN175301-803 Form A)	-20 to +80°C
Media Temperature:	-40 to +125°C
Media Temperature: (Electrical Connection "F", EN175301-803 Form A)	-40 to +105°C
Compensated Temperature:	-15 to +65°C
Storage Temperature:	-40 to +125°C
TC Zero:	≤ ± 1% of FS ≤ ± 2% of FS (2 PSI & below)
TC Span:	≤ ± 1% of FS ≤ ± 2% of FS (2 PSI & below)

Environmental

EMI/RFI Protection:	Yes
IP Rating:*	IP65 minimum
Vibration:	10g, 20 to 5000Hz
Shock:	100g, 11msec, 1/2 sine

* IP Rating is dependent on electrical termination selected. Contact factory for more information.

* IP Rating applies when electrical connector is attached with the appropriate ingress protection.

Electrical (Current)

Outputs:	4-20mA
Excitation:	10-28VDC
Current Consumption:	20mA, typical
Output Load:	0-800 Ohms @ 10-28VDC
Frequency Response (min):	~250Hz
Zero Offset (of FS):	≤ ± 0.5% typical ± 1% max
Span Tolerance (of FS):	≤ ± 0.5% typical ± 1% max

Electrical (Voltage)

Outputs:	1-5V 1-6V
Excitation:	10-28VDC
Current Consumption:	<10mA
Output Load:	5K Ohms, min
Frequency Response (min):	~1kHz
Zero Offset (of FS):	≤ ± 0.5% typical ± 1% max
Span Tolerance (of FS):	≤ ± 0.5% typical ± 1% max


Electrical (Ratiometric Voltage)

Outputs:	0.5-4.5V ratiometric
Excitation:	5VDC +/- 0.5V
Current Consumption:	<10mA
Output Load:	5K Ohms, min
Frequency Response (min):	~1kHz
Zero Offset (of FS):	≤ ± 0.5% typical ± 1% max
Span Tolerance (of FS):	≤ ± 0.5% typical ± 1% max

Electrical (Low Power Voltage)

Outputs:	0.5-2.5V non-ratiometric
Excitation:	3-5VDC unregulated
Current Consumption:	≤ 3mA
Output Load:	5K Ohms, min
Frequency Response (min):	~1kHz
Zero Offset (of FS):	≤ ± 0.5% typical ± 1% max
Span Tolerance (of FS):	≤ ± 0.5% typical ± 1% max


For wiring information, visit core-sensors.com/wiring

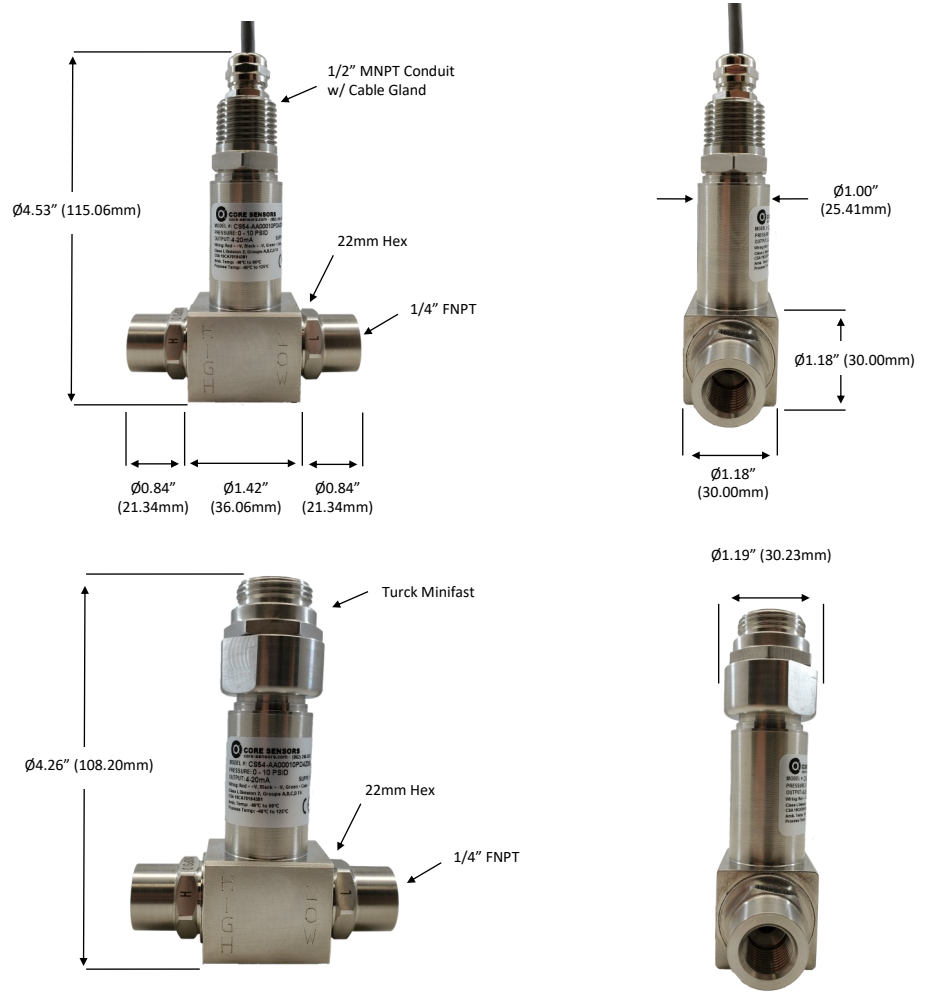

DIMENSIONS

*Dimensions are for reference only

MODEL NUMBER CONFIGURATION

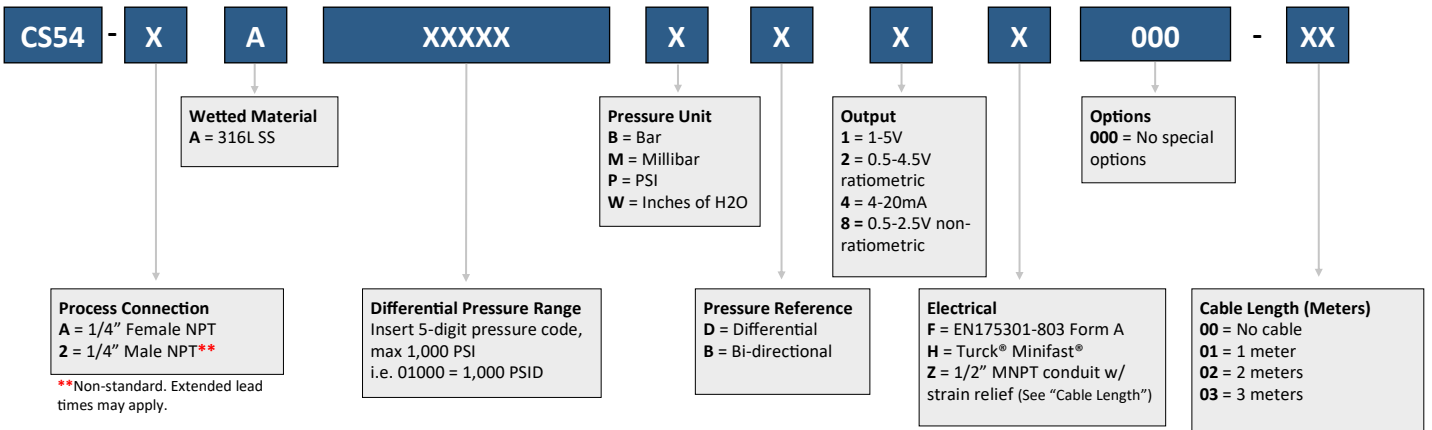

Ordering Example: CS54-AA00010PD4H000-00 (1/4" Female NPT, 316L SS, 0-10 PSI differential, 4-20mA, Turck® Minifast®)
 Not all configurations are available. Our sales team can recommend the closest available configuration based on your requirements.
 Contact Core Sensors for configurations not shown.
 Visit our [How To Buy](#) page or [contact us](#) for a quote.



Caution must be taken when installing and operating the CS54 in known Class I, Division 2 hazardous locations. **Please review the Non-Incendive Operating Instructions prior to installation.** Call Core Sensors at (862) 245-2673 if you are unsure about any of the instructions or to request a copy. Operating Instructions and Certificates of Compliance can be downloaded from the [CS54 product web page](#) at [core-sensors.com](#).

Warranty information can be found online at [core-sensors.com](#).

****Disclaimer:** Unless otherwise agreed in writing, Core Sensors products are not authorized for use in applications including medical devices, life support systems, in-flight aerospace, nuclear or any other application where the product failure could result in personal injury or death.