


CARBON DIOXIDE TRANSMITTER

NDIR CO₂ Sensor with Universal Outputs in an Industrial Housing

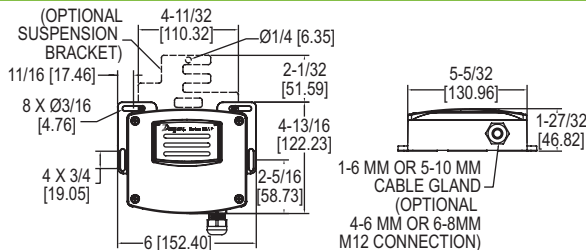

The **Series CDWP Carbon Dioxide Transmitters** accurately monitor the CO₂ concentration in industrial and indoor environments to help achieve energy savings. For increased sensor life and accuracy, a single-beam dual-wavelength non-dispersive infrared (NDIR) sensor is used to eliminate light source aging effects. This sensing technology provides the highest level of accuracy compared to Automatic Baseline Correction methods, which can unintentionally shift the calibration based on CO₂ levels and barometric pressure conditions.

MODEL CHART						
Example	CDWP	-05	W	-M4	-FC	CDWP-05W-M4
Series	CDWP					Carbon dioxide transmitter
Range		02 05 10				2000 PPM 5000 PPM 10000 PPM
Mounting			W H			Wall mount Suspended mount
Electrical Connection				C1 C5 M4 M6		Cable gland 1 to 6 mm cable Cable gland 5 to 10 mm cable M12 connection 4 to 6 mm cable M12 connection 6 to 8 mm cable
Option					FC	Factory calibration certificate

ACCESSORIES	
Model	Description
A-CDWP-L	Replacement lid with filter material
A-CDWP-H	Suspended mount bracket

SPECIFICATIONS	
Sensor: Single beam, dual-wavelength NDIR.	Humidity Limits: 10 to 95% RH (non-condensing).
Range: CO ₂ : 0 to 2000, 0 to 5000, or 0 to 10000 ppm (depending on model).	Power Requirements: 16 to 35 VDC or 19 to 28 VAC.
Accuracy: CO ₂ : ± 40 ppm ±3% of reading.	Power Consumption: Average: 2 w; Peak: 3.75 w.
Temperature Dependence: ±8 ppm/°C at 1100 ppm.	Output: Current: 4 to 20 mA (max. 500 Ω); Voltage: 0 to 5 VDC or 0 to 10 VDC (min. 500 Ω).
Non-Linearity: 16 ppm.	Enclosure Rating: IP54.
Pressure Dependence: 0.13% of reading per mm of Hg.	Mounting Orientation: Vertically, with electrical connections points downward.
Response Time: 300 s (τ ₆₃).	Weight: 26.24 oz (744 g).
Temperature Limits: 32 to 122°F (0 to 50°C).	Agency Approvals: CE.

- FEATURES/BENEFITS**
- IP54 aluminum housing
 - Gray finish tested to withstand 168 hour salt spray test
 - Single-beam dual-wavelength sensor automatically corrects for aging effects
 - Measures unfiltered light intensity directly and eliminates error from incorrect assumptions of gas concentration in theoretical logic assumption methods
 - Universal outputs to work with any building management system

- APPLICATIONS**
- Animal husbandry
 - CO₂ refrigeration monitoring
 - Mechanical room
 - Greenhouses