

# Ultrasonic Flowmeter S-Flow

## Easy Installation, Space Savings

Flow rate is “visualized” using our long-cultivated ultrasonic technologies. Contributes to energy savings and production process solutions.



- Easy Clamp-on type by simply tightening 4 screws.**  
**No need for pipe modification.**
- Integrated detector and flow transmitter for space savings.**
- Built-in pipe surface temperature sensor (optional) and RS-485 communication enable simultaneous flow and temperature monitoring.**



Compliant with



# Easy installation, space savings. Easily deployable ultrasonic flowmeter S-Flow


Carbon neutrality on a global scale has been attracting attention in recent years.

Companies are promoting their activities to achieve high efficiency and energy savings.

Against this backdrop, more demand is growing to control the flow rate of fluid at the end points of the production lines in the factories.

Fuji Electric has developed the easy-deployable Integral Flowmeter, named "S-FLOW" to support such demand.


It has realized easy installation, space savings and affordable cost.

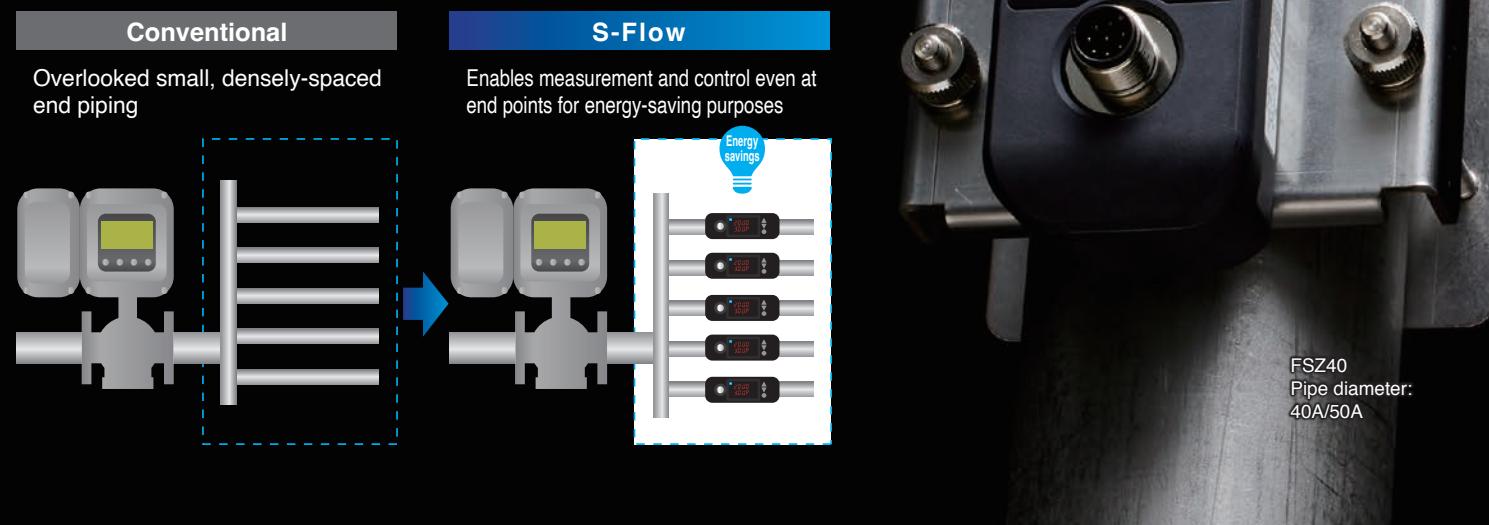

## Measuring principle

### Transit-time measuring method by Fuji proprietary digital signal processing

By using the ultrasonic pulses transmitted diagonally between the upstream and downstream sensors mounted on the outside of the pipe, the flow rate is measured by detecting the time difference obtained by the flow of fluid.

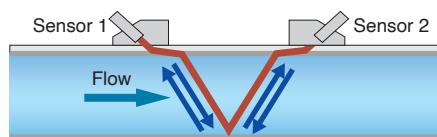



FSZ25  
Pipe diameter:  
25A/32A

FSZ15  
Pipe diameter:  
15A/20A

FSZ08  
Pipe diameter:  
8A/10A

The LED display is composed of inlaid layers. Requires connection to a dedicated cable during use.

## Product lineup

Capable of measuring pipes from 8A to 50A.

Type	Pipe diameter
FSZ08	DN8, DN10 (1/4, 3/8 inch)
FSZ15	DN15, DN20 (1/2, 3/4 inch)
FSZ25	DN25, DN32 (1, 1-1/4 inch)
FSZ40	DN40, DN50 (1-1/2, 2 inch)

## Measurable pipe materials and fluids

Capable of a wide range of pipe materials and fluid types

Pipe materials	Metals (stainless steel, steel, copper), Plastics (PVC, PP, PVDF), etc.
Fluid types	Water, ultrapure water, chemicals, oil, etc.

## Equipment configuration

Integrates the detector and flow transmitter to simplify equipment configurations.



# Easy installation

## Reduces labor hours and installation costs

- Clamp-on type requires no pipe modification. It can be installed without stopping equipment.
- No need for the sensor-distance adjustment. Anyone can easily install it by simply tightening the screws.



Clamp-on type without pipe modification.





Easy installation using a single screwdriver.



The FSZ40 offers front installation.

## Easy to set up

- Configurable only with three buttons. Simply turn on, configure four settings, and start measuring immediately.

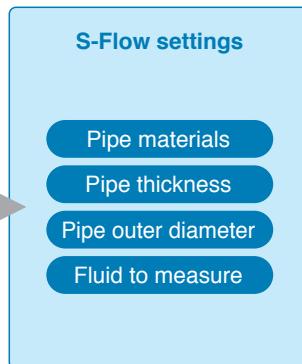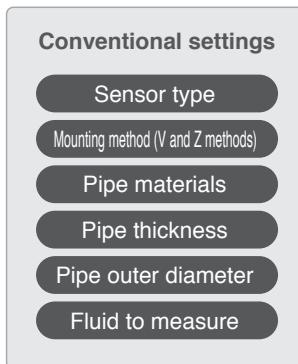

## No grease required

- Installation is easy and no longer requires the application of grease.
- No need to store grease for maintenance purposes.

## Easy-to-read LED display of flow rate values

- Easy-to-read, intuitive 2-row LED display. Front function keys allow for easy operation.



Row 1: Instantaneous flow rate value  
Row 2: Instantaneous flow rate % value



Row 1: Instantaneous flow rate value  
Row 2: Pipe temperature

# Space savings

## Integral, Compact design


- Flow transmitter and detector functions are integrated to achieve compact dimensions.

Compared to conventional flow transmitter (type: FLR), the size is reduced by approximately 76%.



## Can be installed on densely-spaced piping and inside of equipment

- Its compact design allows installation in areas where space is limited, such as in densely-spaced piping and inside equipment.

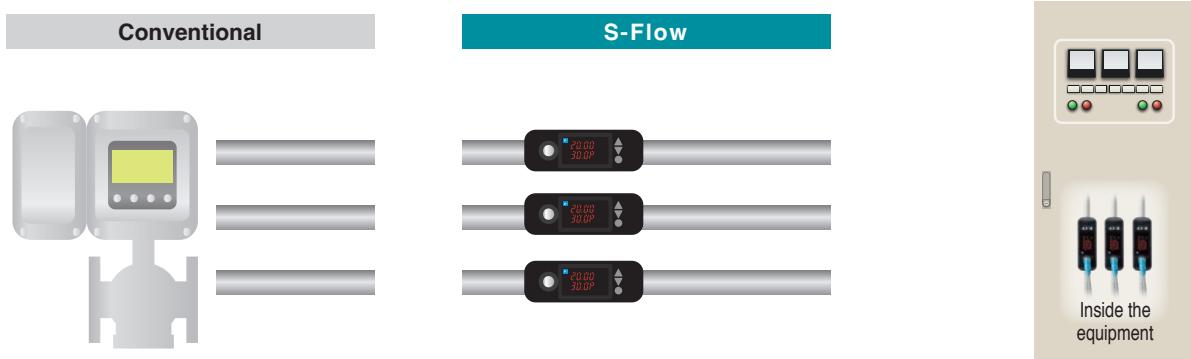


Cannot be mounted on densely-spaced piping due to large size

Can be mounted on small, densely-spaced piping

Compact and easy to mount inside equipment

## Comes standard with RS-485 communication


- RS-485 communication makes it possible to simultaneously output the instantaneous flow rate, integrated flow rate, temperature, and other data. Parameters can also be set using the loader software.

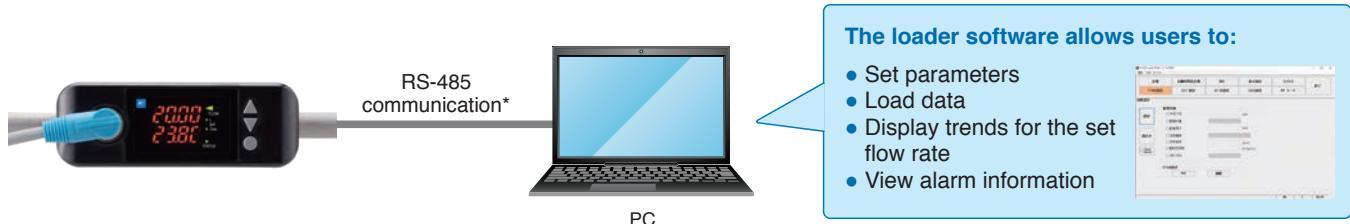

\* To connect to a PC, an RS-485/RS-232C or USB converter is required.


## Built-in temperature measurement function (Optional)

- A built-in temperature measurement function, enables simultaneous measurement of flow rate and temperature.

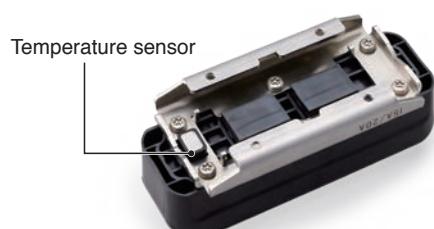


### Flow control of semiconductor manufacturing equipment

In addition to piping for pure water manufacturing processes, cleaning processes, and equipment cooling, it can also be mounted inside equipment where there is densely-spaced small-diameter piping. Contributes to flow control in semiconductor manufacturing lines.

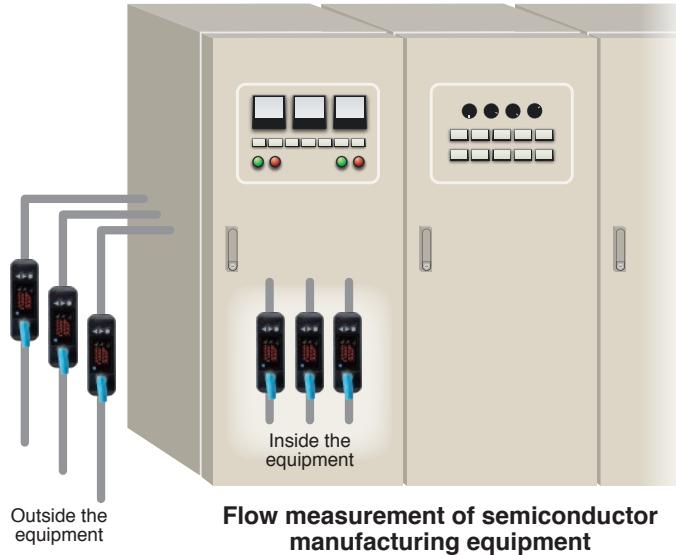

### Flow monitoring of water for building air conditioning flow usage

It can be installed to cold and hot water piping throughout the entire building. By measuring the flow rate, it facilitates more efficient fan coil unit (FCU) operations. Similarly, it also facilitates efficient operation of air handling units (AHU) for large spaces. The monitoring of flow rates contributes to energy savings.

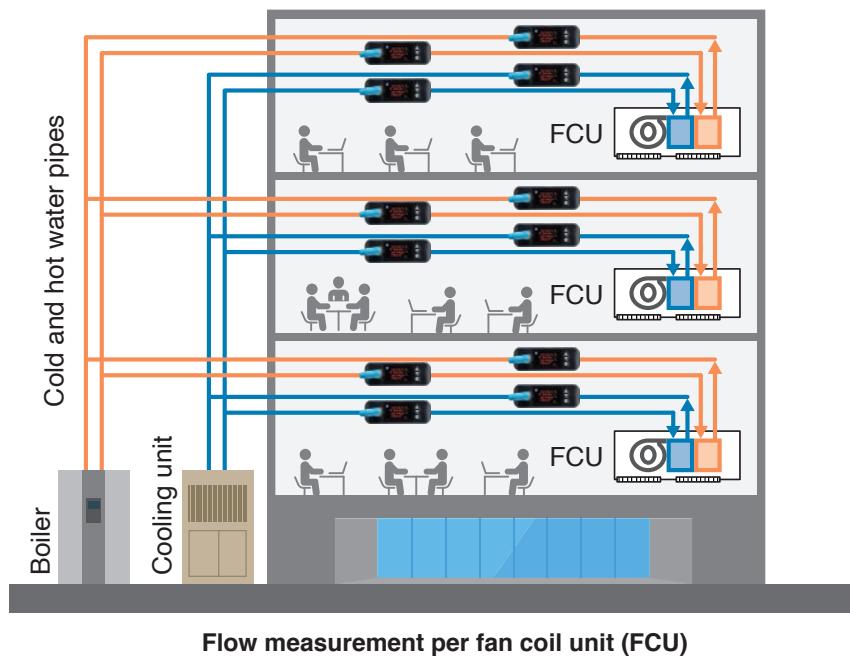

## Type designation

### Flowmeter

1	2	3	4	5	6	7	8	
F	S	Z		Y		3		Description
0	8			Norminal diameter	DN8, DN10 (1/4, 3/8 inch)			
1	5				DN15, DN20 (1/2, 3/4 inch)			
2	5				DN25, DN32 (1, 1-1/4 inch)			
4	0				DN40, DN50 (1-1/2, 2 inch)			
	Y			Power supply	20 to 27.5 V DC			
	Y			Option	None			
	T				Pipe temperature measurement			
	3			Revision No.	—			

### Dedicated cable

1	2	3	4	5	6	7	8	
F	L	Y					1	Description
F								Application Ultrasonic Flowmeter (FSZ)
0	0	3						Dedicated cable 3m
0	1	0						length 10m
		1						Revision No. —

## Specifications


Main unit type	Type	Pipe diameter
	FSZ08	DN8, DN10 (1/4, 3/8 inch)
	FSZ15	DN15, DN20 (1/2, 3/4 inch)
	FSZ25	DN25, DN32 (1, 1-1/4 inch)
	FSZ40	DN40, DN50 (1-1/2, 2 inch)

Configuration	Integrated flow transmitter and detector
Mounting method	Clamp-on type
Measurement method	Transit-time measuring method
Fluid to measure	Homogenous fluids where ultrasonic signals can be transmitted
Measurement range	0 to $\pm 5$ m/s (Min. 0 to $\pm 0.2$ m/s)
Accuracy	Velocity 1 m/s to 5 m/s: $\pm 2\%$ of rate Velocity less than 1 m/s: $\pm 0.02$ m/s
Required straight pipe length	Upstream 10D or more; Downstream 5D or more (D: Pipe inner diameter)
Pipe materials	Metals (stainless steel, steel, copper) Plastics (PVC, PP, PVDF)
Piping thickness	1.2 mm to 4.9 mm
Fluid temperature	-15 to +85°C (Can vary depending on ambient temperature)

Response time	0.5 seconds
Output signal	4 to 20 mA DC: 1 point Contact: 2 points
Communication function	RS-485
Display	LED 4-digit 2-row display
Degree of protection	IP65/IP67
Ambient temperature	-15 to +60°C
Ambient humidity	95%RH or less
Power supply and power consumption	20 to 27.5 V DC, 2.5 W or less
Mass	FSZ08: 400 g FSZ15: 500 g FSZ25: 600 g FSZ40: 800 g
Temperature measurement (Optional)	Pipe surface temperature measurement

## External dimensions

### Flowmeter body

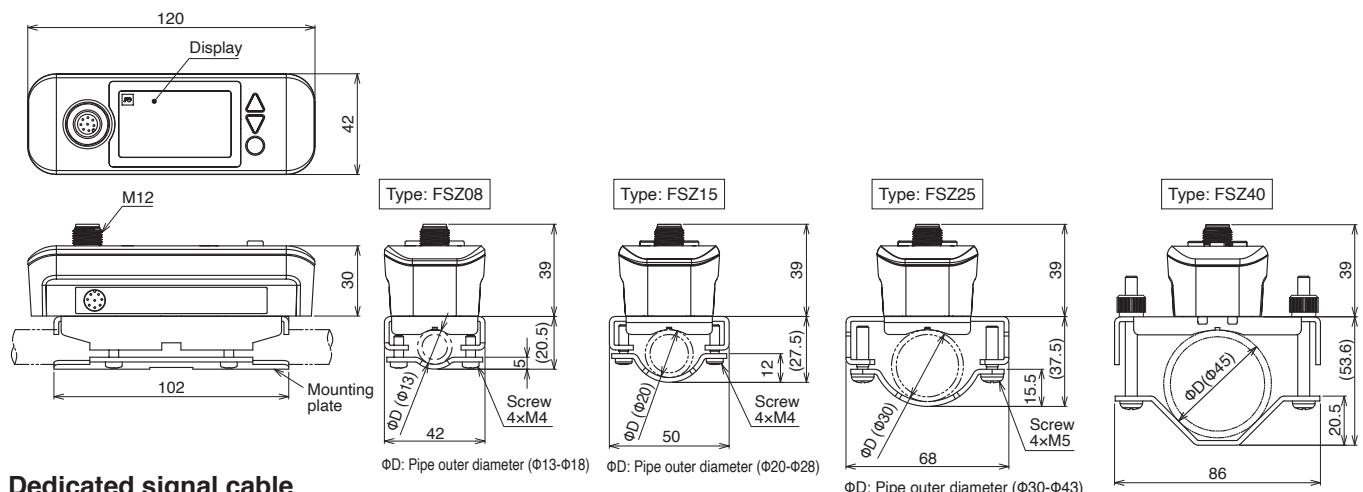

### Dedicated signal cable

Type	FLYF003	FLYF010
L [m]	3±0.15	10±0.2



Gate City Ohsaki, East Tower, 11-2, Osaki 1-chome, Shinagawa-ku, Tokyo 141-0032, Japan  
Phone : (03)5435-7111

---

Internet address : <http://www.fujielectric.co.jp>

Information in this catalog is subject to change without notice.

Printed in Japan 2025-8 FOLS