

XDP

Panametrics Explosion-Proof Display

Applications

Explosion-proof display/controller for use with:

- XMO2 thermoparamagnetic oxygen transmitter
- XMTC thermal conductivity hydrogen/gas transmitter
- Any other 4 to 20 mA output transmitter

Features

- Explosion-proof for Class I, Division 1, Group B, C & D hazardous areas
- Flameproof $\text{Ex II 2 GD EEx d IIC T6 T85}^\circ\text{C}$
- Infrared (IR) through-the-glass keypad
- Universal AC input
- 24 VDC power supply for XMO2, XMTC or O2X1
- Software for measurement of percent or ppm oxygen or hydrogen
- Three-curve software for hydrogen-cooled generator
- Programmable process relay contacts



XDP Explosion-Proof Display

The XDP explosion-proof display provides the measurement of percent or ppm oxygen or hydrogen gas. The explosion-proof XDP is certified for use in Class I, Division 1, Groups B, & D, and $\text{Ex II 2 GD EEx d IIC T6}$ hazardous areas.

The XDP features advanced microprocessor-based electronics, an infrared, through-the-glass keypad, a universal power supply (85 to 264 VAC), one 0/4 to 20 mA or 0 to 2 VDC analog output, four process alarms, and a fault alarm.

Auto-verification/Auto-calibration

The XDP provides long-term, hands-off operation with this optional feature. When initiated, the XDP controls solenoid valves in the sample system to bring zero and span gases to the transmitter. Then the XDP software compares calibration gas readings with factory data to verify proper calibration. If an adjustment is necessary, the XDP makes corrections automatically and notifies the user via the front panel display and alarm contacts.



XDP Specifications

Functional

Analog Output

Linearized isolated 4 to 20 mA, 0 to 20 mA or NAMUR user-selectable, field-programmable output for any range from 0 to 100 percent or 0 to 10,000 ppm.

Input Power

85 to 264 VAC, 47 to 63 Hz, 40 W

Fuse

1.25 A

Analog Input

4 to 20 mA

Output Power Supply

24 VDC \pm 2 VDC at 1.2 Amp

Ambient Temperature Range

14°F to 140°F (-10°C to 60°C)

Keypad

Infrared, through the glass, six keys

Display


Four-line, backlit liquid crystal display

Display Accuracy

\pm 0.25% of full scale

Relay Outputs

- Contact ratings: 2 A, 28 VDC, SPDT
- Programmable as fail-safe or nonfail-safe

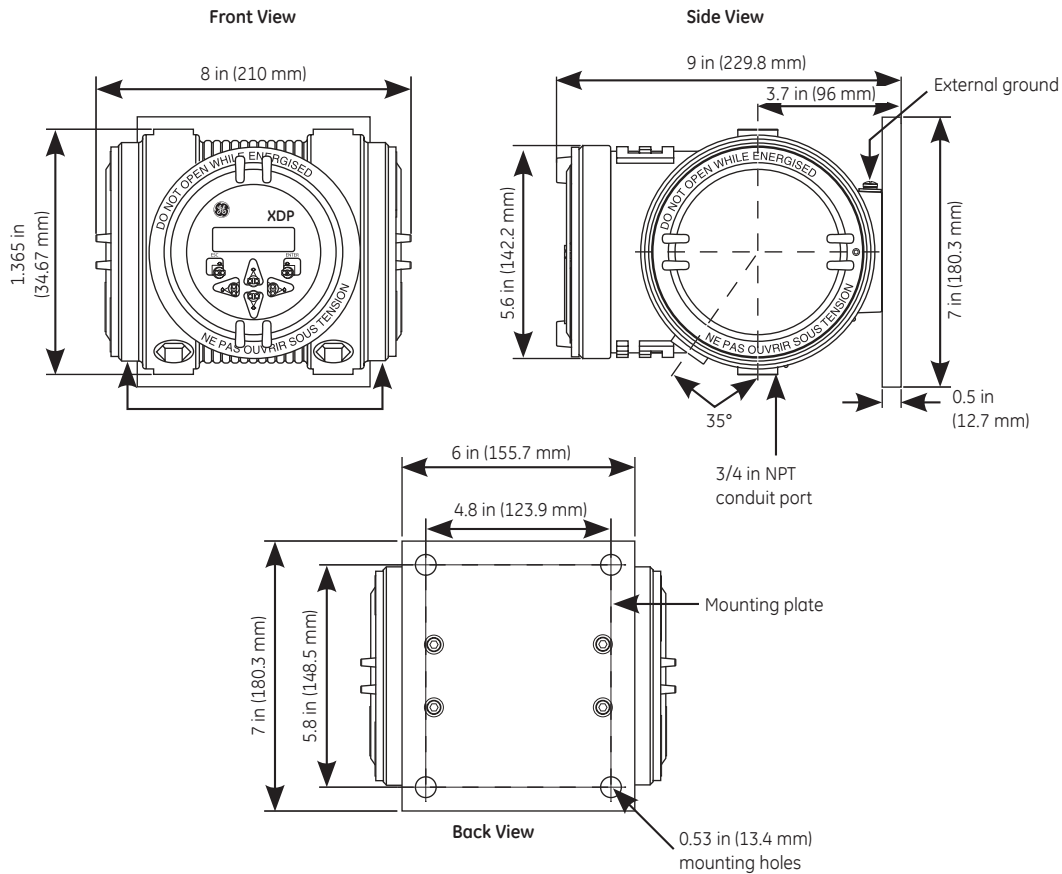

XDP dimensions in inches (mm)

Standard Software for O₂ Analysis

Measurement Range Examples

- 0 to 10; 100; 1,000; or 10,000 ppm O₂
- 0% to 1%; 10%; 21%; 25%; or 100% O₂

Relays

- Four process alarms
- One fault alarm
- Two automatic calibration contacts
- Two calibration alarms

Hydrogen-Cooled Generator Software

Three Ranges

- 0% to 100% H₂ in air
- 0% to 100% H₂ in CO₂
- 0% to 100% air in CO₂

Relays

- Two process alarms
- One fault alarm
- One normal alarm

Physical

Dimensions (w x h x d)

9 in x 10 in x 9 in. (229 mm x 254 mm x 229 mm)

Weight

15 lb (6.8 kg)

Environmental

- Weatherproof enclosure Type 4X/IP66
- Explosion-proof Type 7 enclosure: FM/CSA Class I, Division 1, Group B, C & D
- Flameproof: KEMA 01ATEX2128 Ⓢ II 2 GD EEx d IIC T6 T85°C

European Compliance

Complies with EMC Directive 89/336/EEC, 73/23/EEC LVD (Installation Category II, Pollution Degree 2)

Conduit Entry

Six 3/4 in NPTF conduit ports

Mounting Holes

Four 3/8 in (10 mm) holes

Order Information

Record selected option in blank indicated at bottom of form.

XDP Explosion-proof Display for Use with XMO2, XMTC and O2X1

	Package			
	2	Explosion-proof/weatherproof enclosure		
	Power			
	1	100 VAC		
	2	115 VAC		
	3	230 VAC		
	4	240 VAC		
	Keypad			
	1	IR keypad		
	Configuration			
	1	Standard		
	2	Hydrogen-cooled generator		
XDP	-	-	-	-
				Use this number to order product



www.gesensinginspection.com

920-028D