

DATASHEET

SpeedSys® T10 – T20 – T30

Speed transmitters, monitors & switches

SpeedSys® T10 – T20 – T30

Speed transmitters, monitors & switches

The SpeedSys® tachometer series is a range of speed measurement systems that deliver extensive speed monitoring functions for rotating equipment. The tachometers convert speed sensor signals into processed outputs.

The tachometers feature a small technical footprint with low-impact installation and are available in single, double, and triple-channel versions to suit any application.



SPEED MONITORING FOR A WIDE RANGE OF APPLICATIONS

- Speed monitoring and switching on rotating equipment.
- Advanced signal conditioning and conversion into highly accurate outputs for further processing
- Multi-channel devices feature extensive monitoring functions, including reverse rotation, creep, overspeed, underspeed, acceleration, standstill, and dynamic sensor monitoring.

Typical applications include:

- Compressors and pumps
- Microturbines
- Wind turbines
- Gas and steam turbines
- Marine applications
- Elevators
- General automation

KEY FEATURES

- Very fast system response to overspeed condition
- Two fast responding relays per channel.
- Modbus connectivity
- Suitable for 3-wire voltage sensors and 2-wire voltage sensors

SYSTEM OVERVIEW

Interfaces	T10	T20	T30
Sensor inputs	1x sensor input	2x sensor input	3x sensor input
Digital inputs	1x digital input	2x digital input	3x digital input
Relay outputs	1x DPST 1x SPST	2x DPST 2x SPST	3x DPST 3x SPST
Analog outputs	1x analog output	2x analog output	3x analog output
Frequency outputs	1x frequency output	2x frequency output	3x frequency output
Power supply	1x power supply	2x redundant power supply	3x redundant power supply
Modbus	1x Modbus TCP	1x Modbus TCP	1x Modbus TCP

Speed monitoring	T10	T20	T30
Overspeed	Yes	Yes	Yes
Underspeed	Yes	Yes	Yes
Acceleration		Yes	Yes
Standstill / creep		Yes	Yes
Reverse rotation		Yes	Yes
Dynamic channel monitoring		Yes	Yes
Software voting		1oo2; 2oo2	1oo2; 2oo2; 1oo3; 2oo3; 3oo3
Cross coupling inputs		Yes	Yes

INPUT

Sensor input

Sensor input	Input for (a) 3-wire voltage sensors / PNP / NPN or (b) 2-wire voltage sensors
Frequency range	0.3 Hz to 35 kHz
Measurement accuracy	0.05 %

(a) 3-wire voltage

Input type	3-wire voltage input (typical: Hall effect, eddy current, PNP or NPN)
Sensor power supply	24.0 V (@ 25 mA)
Input range	0 V to 24 V
Trigger level (programmable)	0 V to 12 V
Impedance	500 k Ω (typical)
Sensor monitoring	Open circuit detection, sensor power supply short circuit detection

(b) 2-wire voltage

Input type	2-wire voltage input (typical: electromagnetic sensor)
Sensor power supply	n/a
Input range	50 mV _{RMS} to 80 V _{RMS}
Trigger level (programmable)	-12 V to 12 V
Impedance	100 k Ω
Sensor monitoring	Open circuit detection

Digital input

Input range	0 V to 24 V, max 25 mA
Logic "0"	< 10 V
Logic "1"	> 14 V
Impedance	1 k Ω

OUTPUT

Relays

Number	T10 – 2x high speed relays T20 – 4x high speed relays T30 – 6x high speed relays
Types	T10 – 1x DPST (2x COM & 2x NO) and 1x SPST (1x COM and 1x NO) T20 – 2x DPST (2x COM & 2x NO) and 2x SPST (1x COM and 1x NO) T30 – 3x DPST (2x COM & 2x NO) and 3x SPST (1x COM and 1x NO)
Function	User-configurable relays for speed limits (e.g., overspeed or underspeed)
Maximum switching capacity	30 V _{DC} / 2 A (resistive load) 30 V _{DC} / 100 mA (inductive load)
Hysteresis	User-configurable
Trip state	User-configurable normally open or normally closed

Analog output

Number	T10 – 1x analog output. T20 – 2x analog output. T30 – 3x analog output.
Type	4 to 20 mA current loop (device-powered)
Function	User-configurable range to transmit current output value equivalent to the measured speed.
Resolution	16 bit (0 – 24 mA)
Accuracy	0.05 %

Digital frequency output

Number	T10 – 1x frequency output. T20 – 2x frequency output. T30 – 3x frequency output.
Type	Open collector output, NPN, requires pull-up resistor ($\geq 1,200 \Omega$ recommended)
Capacity	24 V _{DC, external} / max. 20 mA

Status LED indicators

LED indicators	T10 – 1x relay status & 1x system status T20 – 2x relay status & 2x system status T30 – 3x relay status & 3x system status
----------------	--

SYSTEM FEATURES

Reaction time

Speed measurement time (T_m)	Dependent on selected measurement time. (2 – 1000 ms, 10 ms default)
Hardware reaction time (T_h)	Relays: ≤ 4 ms Analog out: ≤ 100 ms
Total reaction time ($T_h + T_m$)	Relays, typical: ≤ 6 ms @ $T_m = 2$ ms ≤ 14 ms @ $T_m = 10$ ms (default) Analog out, typical: ≤ 100 ms

PC interface

TCP/IP programming and status reading
(Windows® 10 and higher proprietary software application)

Modbus interface

Modbus TCP

Power supply input

Input voltage range	24 V _{DC} (18 V _{DC} – 31,2 V _{DC})
Current consumption	T10 – max. 160 mA T20 – max. 320 mA (max. 160 mA / channel) T30 – max. 480 mA (max. 160 mA / channel)

Reverse polarity protection No

Heat dissipation

T10 – max. 4 W
T20 – max. 8 W
T30 – max. 12 W

Housing

Material	Polyamide (PA 66 GF 30)
Connectors	Push-in type terminals
Dimensions	T10 – 22.5 x 127 x 114 mm (0.89 x 5.00 x 4.49") T20 – 45.0 x 127 x 114 mm (1.78 x 5.00 x 4.49") T30 – 67.5 x 127 x 114 mm (2.67 x 5.00 x 4.49")

Mounting DIN rail ("top hat", 35 mm)

Ingress protection

IP20 according to IEC 60529
Indoor use or use in a protective enclosure

Weight

T10 – 190 g
T20 – 340 g
T30 – 490 g

Environmental conditions

Operating temperature	-20 to 60 °C (-4 to 140 °F)
Storage temperature	-40 to 85 °C (-40 to 185 °F)
Operating & storage humidity	5 to 95 % RH. Condensation to be avoided.


Conformal coating

Yes


Other

Over Voltage Category (OVC) II, pollution degree 2 (IEC 60664-1)

DIMENSIONS AND MOUNTING

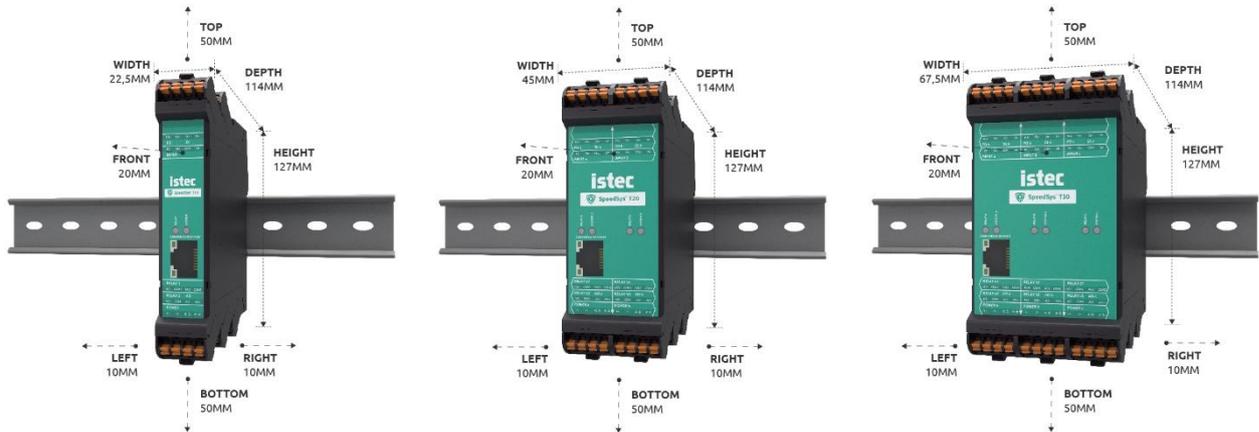

CONNECTION DIAGRAM

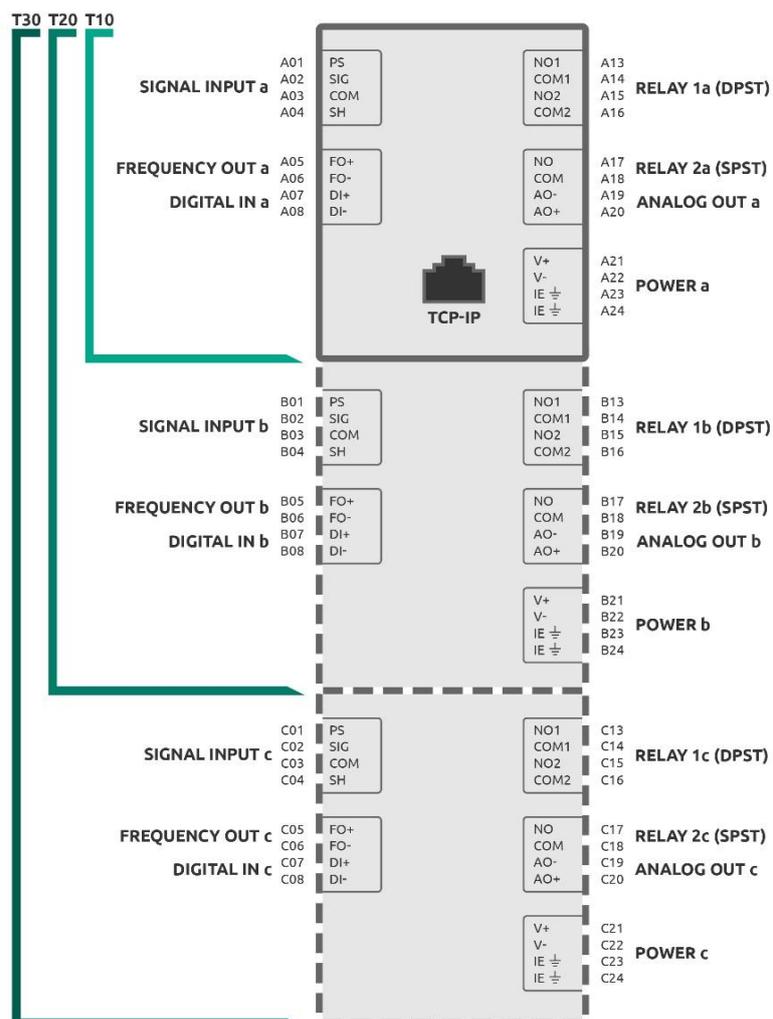

APPROVALS

International standards	CE
Electromagnetic compatibility	EN IEC 61326-1
Environmental / RoHS	EN IEC 63000 (RoHS 3)
Marine type approval	DNV Type approved product

ABOUT ISTECH

We ensure maximal value generation of your critical machinery with advanced protection and monitoring solutions. Every Istec product is designed to meet the increasing demands of industrial applications and taps into our 50 years of experience in the industry.

Our expertise is to support and maintain these critical sensors and systems in the field throughout their operational life; to increase safety, maximize machine availability and to provide new monitoring data and machine insights.

Questions and support?

We are ready to help you!

Visit www.istec.com/support

Contact Istec International

Meer en Duin 8

2163 HA, Lisse Netherlands

+31 (0)252 433 400

www.istec.com

This product has been tested according to the listed standards. If the product is used in a manner not specified by manufacturer the degree of protection may be impaired. Therefore, the product documentation must be read completely, carefully and all safety instructions must be followed.

The information in this document, like descriptions, drawings, recommendations, and other statements, was drawn in good faith to be correct, but the completeness and accuracy of this data cannot be guaranteed. Not all possibilities or situations are described in the product documentation. Before using this product, the user must evaluate it and determine its suitability to the intended application.

Note: Specifications are subject to change without notice. Always check for the latest version with your supplier. This document is cleared for public release.