

Small Displacement Volume Mini Diaphragm Seal Type L990.TA

WIKA Datasheet L990.TA

Application

Process industry diaphragm seal to combine with Bourdon tube pressure gauges. Intended for corrosive, contaminated, hot or viscous pressure media.

Design

- Upper and lower housing welded with integral diaphragm. It requires hydraulic fluid to transmit pressure to instrument

Process Connection

¼" or ½" NPT-female, other see options

Instrument Connection

¼" or ½" NPT-female

Suitable Pressure Ranges (MWP 2500PSI @100°F)

2 ½" gauge: 100 PSI to 2500 PSI

4 or 4 ½" gauge: 400 PSI to 2500 PSI

Available Options

See Selection Guide (over)

Volumetric Data

Displacement typically for 1.3" SS diaphragm

$\Delta V = 0.51 \text{ cm}^3$ [0.0311 in³]

Total cavity volume max $V_0 = 0.7 \text{ cm}^3$ [0.0427 in³]





Mini Diaphragm Seal Model L990.TA

To determine the effects of temperature and response time in a specific application, contact the factory for an **Application Questionnaire**. The information provided will allow WIKA Technical Support to accurately model your application parameters using state-of-the-art computer simulation techniques.

DM: Effective Diaphragm Diameter
G1: Instrument Connection
G2: Process Connection
All Dimensions in inches unless otherwise noted

G1	G2	A	B	C	DM	E	F	Weight lbs
1/4" NPT or 1/2" NPT	1/4" NPT or 1/2" NPT	1.63 Across Flats	1.06	1.60	1.3	2.05	0.95	0.7

G1	G2	A	B	C	DM	E	F	Weight lbs
1/4" NPT or 1/2" NPT	1/4" NPT or 1/2" NPT	1.63 Across Flats	1.06	1.60	1.3	2.68	1.58	1.0

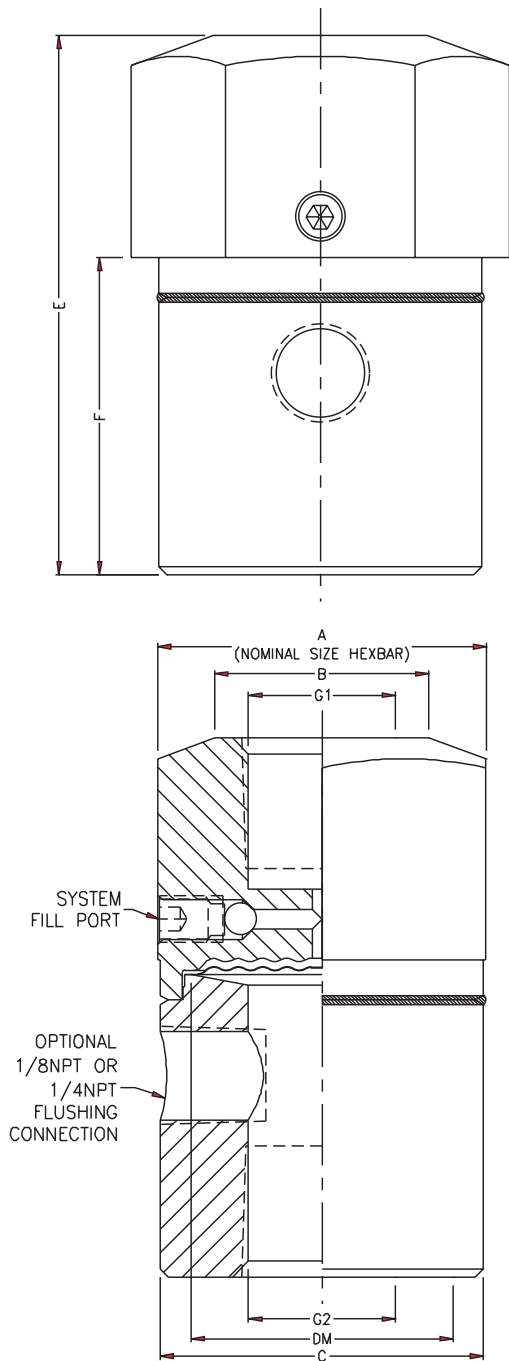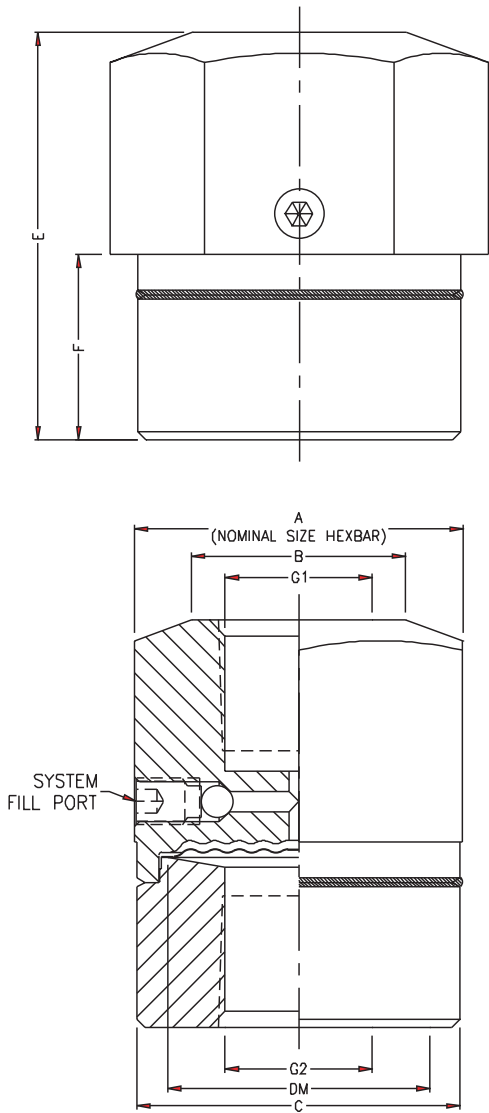

L990.TA Selection Guide

Field no.	Code	Description - Small Mini Diaphragm Seal, Threaded
1	Instrument Connection	
	N4F	1/2" NPT female
	N2F	1/4" NPT female
	CPL	Capillary (Axial weld-in) connection - (see note 1)
2	Process Connection	
	N2F	1/4" NPT female
	N4F	1/2" NPT female
	N2	1/4" NPT male
	N4	1/2" NPT male
3	Upper Housing Material (Instrument Side)	
	SS	Stainless steel 316L (1.4435)
	TI	Titanium Grade 2 (3.7035) - (see note 2)
	MO	Monel 400 (2.4360)
	HC	Hastelloy C276 (2.4819)
	CA	Carpenter 20 (2.4660)
	XX	Other - consult factory
4	Lower Housing Material	
	SS	Stainless steel 316L (1.4435)
	HC	Hastelloy C276 (2.4819)
	MO	Monel 400 (2.4360)
	IC	Incoloy 825 (2.4858)
	TI	Titanium Grade 2 (3.7035) - (see note 2)
	CA	Carpenter 20 (2.4660)
	DP	Duplex 2205 (1.4462)
	XX	Other - consult factory
	5	Flushing Connection Lower Housing (see note 3)
-0		Without
-1		1 X 1/8 NPT
-2		1 X 1/4 NPT

Field no.	Code	Description - Small Mini Diaphragm Seal, Threaded
6	Diaphragm Material	
	SS	Stainless steel 316L (1.4435)
	HC	Hastelloy C276 (2.4819)
	MO	Monel 400 (2.4360)
	IC	Incoloy 825 (2.4858)
	TI	Titanium Grade 2 (3.7035) - (see note 2)
	CA	Carpenter 20 (2.4660)
	DP	Duplex 2205 (1.4462)
	S4	Stainless steel 304L (1.4304)
	XX	Other - consult factory
7	Pressure Rating @ 250°F	
	2500	2500 psi MWP
	5000	5000 psi MWP
8	Options - (see note 4)	
	XMT	Material Certificate 3.1 EN10204 (metal only)
	XNC	Wetted Parts NACE (MR0175/ MR0103 Year 2009) compliant
	CE4	4" Cooling element - (see note 1, 5)
	PLG	Provide flushing port plugs - 1/8 & 1/4 male

Notes:
1) Axial weld-in connections and cooling elements are only available on 316L stainless steel upper housings.
2) Titanium is not offered with any other materials other than itself for this seal model.
3) Plugs are not supplied with flushing ports as standard.
4) List options in alphabetical order at the end of the configuration code.
5) Cooling elements are welded to the diaphragm seal.

Notes:

- 1) Axial weld-in connections and cooling elements are only available on 316L stainless steel upper housings.
- 2) Titanium is not offered with any other materials other than itself for this seal model.
- 3) Plugs are not supplied with flushing ports as standard.
- 4) List options in alphabetical order at the end of the configuration code.
- 5) Cooling elements are welded to the diaphragm seal.

Order Sample

Order Sample														
MODEL	INSTRUMENT CONNECTION		PROCESS CONNECTION		UPPER HOUSING MATERIAL		LOWER HOUSING MATERIAL		FLUSHING CONNECTION		DIAPHRAGM MATERIAL		PRESSURE RATING	
L990.TA	N4F	X	N4F	SS	SS	-0	SS							
Field no.	1		2		3		4		5		6		7	

Ordering information

Pressure gauge model / Nominal size / Scale range / Size of connection / Optional extras required.
 Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing.
 Modifications may take place and materials specified may be replaced by others without prior notice.



WIKA Instrument, LP
 1000 Wiegand Boulevard
 Lawrenceville, GA 30043-5868
 Tel: 888-WIKA-USA • 770-513-8200
 Fax: 770-338-5118
 E-Mail: info@wika.com
 www.wika.com