TEMP1000SRUGGED TEMPERATURE DATA LOGGER WITH 1" PROBE



Features

- Extended temperature range
- Rugged
- Submersible
- Reusable
- Programmable start time
- Real-time operation
- NIST traceable
- User-friendly
- Low cost
- CE compliant

Benefits

- Simple Setup and Installation
- Minimal Long-Term Maintenance
- Long-Term Field Deployment


Applications

- Implement HACCP programs
- Autoclave verification
- Food preparation and processing
- Environmental studies
- Well monitoring
- Dishwasher testing
- Hostile environment monitoring
- Medical and pharmaceutical



The Temp1000S temperature logger is a rugged, submersible, battery powered, stand alone device which can be used to automatically record temperatures between -40 °C and 150 °C. this all in one compact, portable, easy to use device is able to measure and record up to 32,767 temperature measurements. The Temp1000S features a 1 inch rigid external probe and is ideal for use in harsh environments. Its real time clock ensures that all the data is time and date stamped. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The Temp1000S makes data retrieval quick and easy. Simply plug the device into an empty COM or USB port and our user-friendly software does the rest.

MADGETECH DATA LOGGER SOFTWARE

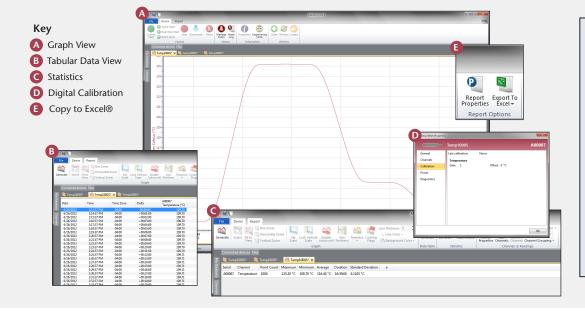

Software Features:

- Multiple graph overlay
- Statistics
- Digital calibration
- Zoom in/ zoom out
- Lethality equations (F0, PU)
- Mean Kinetic Temperature
- Full time zone support
- Data annotation
- Min./Max./Average lines
- Data table view
- Automatic report generation
- Summary view
- Multilingual

TEMP1000S SPECIFICATIONS*

Temperature Sensor:	100 $Ω$ Platinum RTD	
Temperature Range:	-40 °C to +150 °C	
Temperature Resolution:	0.05 °C	
Calibrated Accuracy:	±0.5 °C	
Specified Accuracy Range:	100 °C span between calibration points	
Start Modes:	Software programmable immediate start or delay start up to six months in advance	
Real Time Recording:	May be used with PC to monitor and record data in real time	
Memory:	32,767 readings	
Reading Rate:	1 reading every 2 seconds up to 1 reading every 12 hours	
Lethality Equations:	Sterilization Units and Pasteurization Units are available in software with the click of a button.	
Calibration:	Digital calibration through software	
Calibration Date:	Automatically recorded within device	

*Battery Type:	3.6V lithium battery included *Must be sent to MadgeTech for battery replacement.
Battery Life:	1 year typical (15 minute reading rate at 25 °C)
Data Format:	Date and time stamped °C, °F, K, °R
Time Accuracy:	±1 minute/month at 20 °C (RS232 cable not in use)
Computer Interface:	PC serial or USB (Interface cable required); 2,400 baud
Software:	XP SP3/Vista/Windows 7/Windows 8
Operating Environment:	-40 °C to +150 °C, 0 %RH to 100 %RH, submersible to 150 ft
Body Dimensions:	4.8 in x 1.0 in dia. (122 mm x 26 mm dia.)
Probe Dimensions:	1.0 in x 3/16 in dia. (26 mm x 5 mm dia.)
Enclosure:	303 stainless steel
Weight:	8 oz (225 g)
Approvals:	CE

BATTERY WARNING: WARNING: FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT SHORT CIRCUIT, CHARGE, FORCE OVER DISCHARGE, CRUSH, PENETRATE, OR INCINERATE. BATTERY MAY LEAK OR EXPLODE IF HEATED ABOVE 150 $^{\circ}$ C (302 $^{\circ}$ F).

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

ORDERING INFORMATION

MODEL	DESCRIPTION	PRICE (U.S.)
TEMP1000S	Rugged Temperature Recorder with 1" Probe	\$549.00
IFC110	Software, manual and RS232 interface cable	\$99.00
IFC200	Software, manual and USB interface cable	\$119.00
*NIST	NIST Calibration Certificate	\$60.00
**ER1425S	Replacement battery for Temp1000S **Must be sent to MadgeTech for battery replacement.	\$50.00

Temperature Humidity **ASK ABOUT** Pressure **OUR OTHER** рΗ DATA Level **LOGGERS** Shock LCD Display Pulse/Event/State Current Voltage Wireless Intrinsically Safe Spectral Vibration Motion

For Quantity Discounts call 603-456-2011 or email sales@madgetech.com

*To order the product with the NIST certificate add -CERT to the end of the part number and add \$60.00 to the price.



DOC-1015009-00 REV 11 2014.11.11