


PE2099



Pressure sensor with display

PE-1-1BRER14-MFRKG/US/ IE

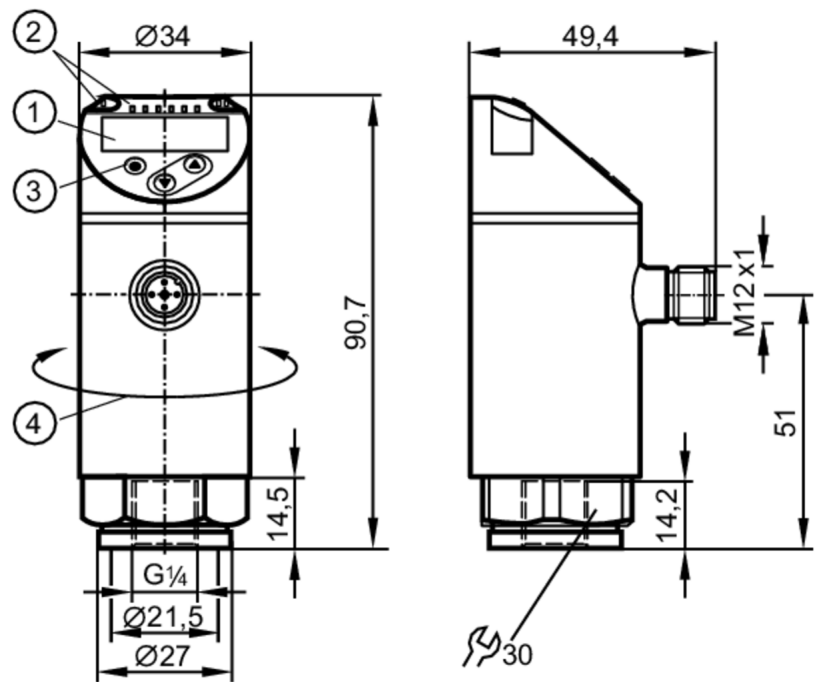

- 1 alphanumeric display 4-digit red/green
- 2 LEDs Display unit / Switching status
- 3 Programming button
- 4 upper part of the housing can be rotated 345°



Product characteristics				
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1			
Measuring range	-1...1 bar	-1000...1000 mbar	-14.5...14.5 psi	-100...100 kPa
Process connection	threaded connection G 1/4 Internal thread			
Application				
System	gold-plated contacts			
Measuring element	ceramic-capacitive pressure measuring cell			
Application	for industrial applications			
Media	liquids and gases			
Medium temperature [°C]	-25...80			
Min. bursting pressure	30000 mbar	435 psi	3000 kPa	
Pressure rating	10000 mbar	145 psi	1000 kPa	
Vacuum resistance	-1000 mbar		-0.1 MPa	
Type of pressure	relative pressure			
Electrical data				
Operating voltage [V]	18...30 DC; (to SELV/PELV)			
Current consumption [mA]	< 35			
Min. insulation resistance [MΩ]	100; (500 V DC)			
Protection class	III			
Reverse polarity protection	yes			
Power-on delay time [s]	0.3			



Pressure sensor with display

PE-1-1BRER14-MFRKG/US/ /E

Integrated watchdog	yes			
Inputs / outputs				
Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1			
Outputs				
Total number of outputs	2			
Output signal	switching signal; analog signal; IO-Link; (configurable)			
Electrical design	PNP/NPN			
Number of digital outputs	2			
Output function	normally open / closed; (configurable)			
Max. voltage drop switching output DC [V]	2			
Permanent current rating of switching output DC [mA]	250			
Switching frequency DC [Hz]	< 500			
Number of analog outputs	1			
Analog current output [mA]	4...20; (scalable 1:5)			
Max. load [Ω]	500			
Analog voltage output [V]	0...10; (scalable 1:5)			
Min. load resistance [Ω]	2000			
Short-circuit protection	yes			
Type of short-circuit protection	yes (non-latching)			
Overload protection	yes			
Measuring/setting range				
Measuring range	-1...1 bar	-1000...1000 mbar	-14.5...14.5 psi	-100...100 kPa
Set point SP	-985...1000 mbar	-14.3...14.5 psi	-98.5...100 kPa	
Reset point rP	-995...990 mbar	-14.45...14.4 psi	-99.5...99 kPa	
Analog start point	-1000...600 mbar	-14.5...8.7 psi	-100...60 kPa	
Analog end point	-600...1000 mbar	-8.7...14.5 psi	-60...100 kPa	
In steps of	5 mbar	0.05 psi	0.5 kPa	
Accuracy / deviations				
Switch point accuracy [% of the span]	< ± 0,4; (Turn down 1:1)			
Repeatability [% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)			
Characteristics deviation [% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (Turn down 1:1; BFSL = Best Fit Straight Line; LS = limit value setting)			
Hysteresis deviation [% of the span]	< ± 0,1; (Turn down 1:1)			
Long-term stability [% of the span]	< ± 0,05; (Turn down 1:1; per 6 months)			
Temperature coefficient zero point [% of the span / 10 K]	0,2; (-25...80 °C)			
Temperature coefficient span [% of the span / 10 K]	0,2; (-25...80 °C)			
Notes on the accuracy / deviation	switch point accuracy, linearity error under DNV GL: < ± 1%: < ± 1%			



Pressure sensor with display

PE-1-1BRER14-MFRKG/US/ /E

Reaction times		
Response time	[ms]	< 1.5
Delay time programmable dS, dr	[s]	0...50
Damping process value dAP	[s]	0...4
Damping for the analog output dAA	[s]	0...4
Max. response time analog output	[ms]	3
Software / programming		
Parameter setting options	hysteresis / window; normally open / closed; switch-on/switch-off delay; Damping; Display unit; current/voltage output	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode	yes	
Required master port class	A	
Process data analog	1	
Process data binary	2	
Min. process cycle time	[ms]	2.3
Supported DeviceIDs	Type of operation	DeviceID
	default	467
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection	IP 65; IP 67	
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	171
UL approval	UL approval number	J012
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight	[g]	216.45
Housing	tubular	
Dimensions	[mm]	Ø 34 / L = 90.7
Material	stainless steel (1.4404 / 316L); PBT+PC-GF30; PBT-GF20; PC	
Materials (wetted parts)	stainless steel (1.4404 / 316L); Al2O3 (ceramics); EPDM	

PE2099



Pressure sensor with display

PE-1-1BRER14-MFRKG/US/ /E


Min. pressure cycles	100 million
Tightening torque [Nm]	25...35; (recommended tightening torque; Depends on lubrication, seal and pressure rating)
Process connection	threaded connection G 1/4 Internal thread
Restrictor element integrated	no (can be retrofitted)

Displays / operating elements		
Display	Display unit	5 x LED, green (mbar, psi, kPa, inH2O, inHg)
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, red/green 4-digit


Remarks	
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

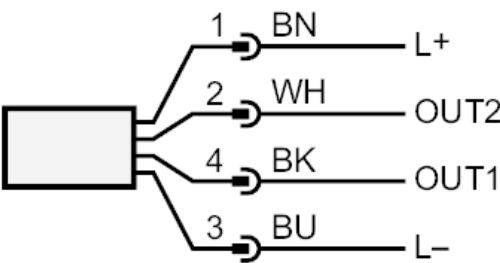

OUT1 switching output or IO-Link
OUT2 switching output or analog output
Colors to DIN EN 60947-5-2
Core colors :
BK = black
BN = brown
BU = blue
WH = white