

Rosemount™ 403/403VP

Contacting Conductivity Sensors



Reliably measure conductivity with PURSense™ sensors

Rosemount 403 and 403VP contacting conductivity sensors are sanitary flange sensors commonly used in water purification systems in the food and beverage industry. These sensors are ideal for measuring electrolytic conductivity in Water-for-Injection (WFI).

Overview



Meet Sanitary and Hygienic Requirements

- Available with 1-1/2 in. and 2-in. sanitary flange process connections.
- All wetted plastics and elastomers are compliant with 21CFR177.
- All wetted surfaces have a 16 microinch (0.4 micrometer) Ra finish.
- O-rings meet USP Class VI requirements.

High Performance Design

- Available in 0.01, 0.1, and 1.0/cm cell constants.
- Internal platinum RTD for temperature compensation.
- Steam sterilizable up to 135 °C.
- Operates in pressures up to 250 psig.
- Variopol (VP6) cable connection option, for quick cable-to-sensor release, eliminates cable twisting.

Minimize Start-up and Installation Time

- A factory-measured cell constant ensures out-of-the-box accuracy and no initial calibration requirements.

Contents

Overview	2	Installation Drawings	6
Ordering Information	3	Accessories	9
Specifications	5	Engineering Specification	10

Ordering Information



The Rosemount 403 and 403VP contacting conductivity sensors are ideal for measuring electrolytic conductivity in clean water applications in the pharmaceutical and food and beverage industries. All wetted polymers are 21CFR177 (FDA) compliant, and the O-rings also meet USP Class VI requirements. All wetted surfaces have a 16 micro inch (0.4 micrometer) Ra finish. A certificate of conformance is provided with each sensor. For a copy of supplier material traceability certificates, order option -99Q8. Interconnecting VP cable is sold separately (for Rosemount 403VP).

Table 1. Rosemount 403 Contacting Conductivity Sensor ordering information

Model	Sensor type
403	Contacting Conductivity Sensor
Cell Constant	
11	0.01/cm
12	0.1/cm
13	1.0/cm
Flange Size	
20	1-1/2 in. Stainless Steel Sanitary Fitting
21	2 in. Stainless Steel Sanitary Fitting
Temperature Compensation	
_	No Selection – Pt-1000 ⁽¹⁾
54	Pt-100 ⁽²⁾
Optional Options	
Insertion Length	
_	No Selection – Standard Insertion Length
36	Extended Insertion Length ⁽³⁾
Cable Length	
_	Standard 10 ft. Integral Cable
50	50 ft. Integral Cable
Special	
_	No Selection – Supplier Material Traceability Certificate not Included
99Q8	Supplier Material Traceability Certificate Included
Typical Model Number: 403VP-11-20-_-36-99Q8	

- For compatibility with Rosemount 56, 1056, 1057, 1066, and 5081 Transmitters. Also compatible with legacy transmitter models 1055, 54e, 4081, 6081, and XMT.
- For compatibility with legacy transmitter models 1054, 2054, and 2081.
- Extended insertion length is 6 inches from inside face of flange to end of sensor.

Table 2. Rosemount 403VP Contacting Conductivity Sensor ordering information

Model	Sensor type
403VP	Contacting Conductivity Sensor
Cell constant	
11	0.01/cm
12	0.1/cm
13	1.0/cm
Flange Size	
20	1-1/2 in. Stainless Steel Sanitary Fitting
21	2 in. Stainless Steel Sanitary Fitting
Temperature Compensation	
_	No Selection – Pt-1000 ⁽¹⁾
54	Pt-100 ⁽²⁾
Optional Options	
Insertion Length	
_	No Selection – Standard Insertion Length
36	Extended Insertion Length ⁽³⁾
Special	
_	No Selection – Supplier Material Traceability Certificate not Included
99Q8	Supplier Material Traceability Certificate Included
Typical Model Number: 403VP-11-20-_-36-99Q8	

1. For compatibility with Rosemount 56, 1056, 1057, 1066, and 5081 Transmitters. Also compatible with legacy transmitter models 1055, 54e, 4081, 6081, and XMT.
2. For compatibility with legacy transmitter models 1054, 2054, and 2081.
3. Extended insertion length is 6 inches from inside face of flange to end of sensor.


Specifications

Table 3. Rosemount 403/403VP Contacting Conductivity Sensor specifications

Cell constants	
0.01, 0.1 and 1.0/cm	
Wetted materials	
titanium; 316 stainless steel; PCTFE (Neoflon), compliant with 21CFR 177.1380; EP, compliant with 21CFR177.2600 and USP Class VI	
Surface finish	
All wetted surfaces have 16 micro in. (0.4 micrometer) Ra finish.	
Process connection	
1-1/2 in. or 2-in. sanitary flange	
Temperature	
32–221 °F (0–105 °C). Sensors are steam sterilizable to 275 °F (135 °C)	
Pressure	
250 psig (1825 kPa abs) maximum	
Cable length	
10 ft (3.1 m) standard; 50 ft (15.2 m) optional	
Weight/shipping weight	
403 sensor with 10 ft (3.1 m) cable	2 lb (1.0 kg)/3 lb (1.5 kg)
403 sensor with 50 ft (15.2 m) cable	4 lb (2.0 kg)/5 lb (2.5 kg)
403VP sensor	1 lb (0.5 kg)/2 lb (1.0 kg) (rounded up to nearest 1 lb or 0.5 kg)


Installation Drawings

Figure 1. Rosemount 403 and 403VP Sensor Installation

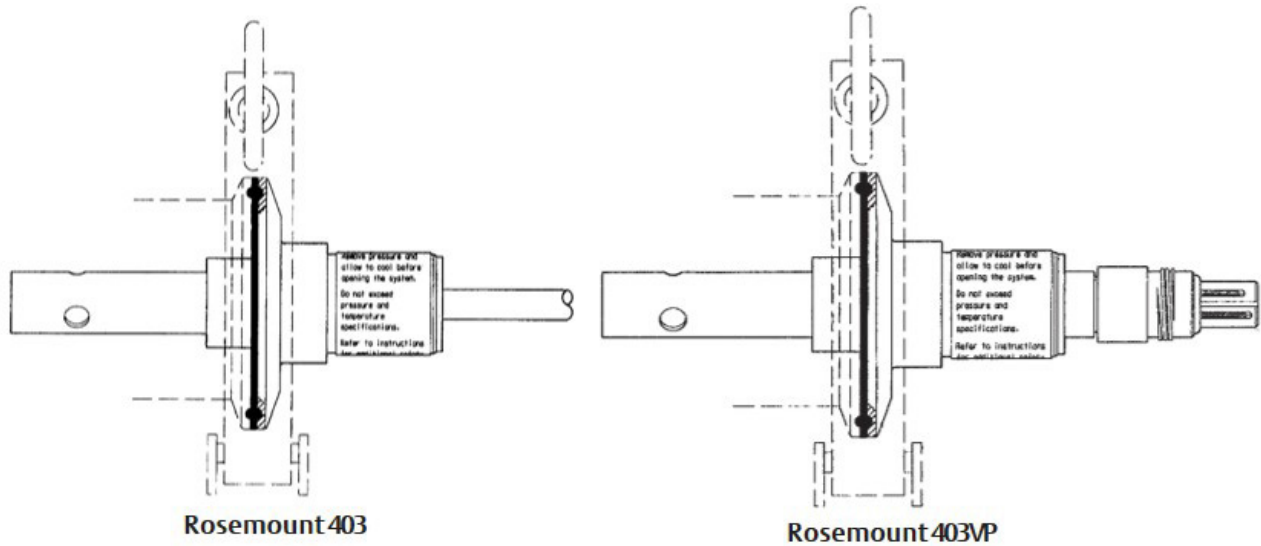


The Tri-Cover tee, clamp, and gasket are supplied by the user. Install the sensor so that it is completely submerged in the process liquid. Installation in a vertical pipe run is best. If the sensor must be installed in a horizontal pipe run, place the sensor in the 3 o'clock position.

Figure 2. Rosemount 403 Sensor Dimensional Drawings

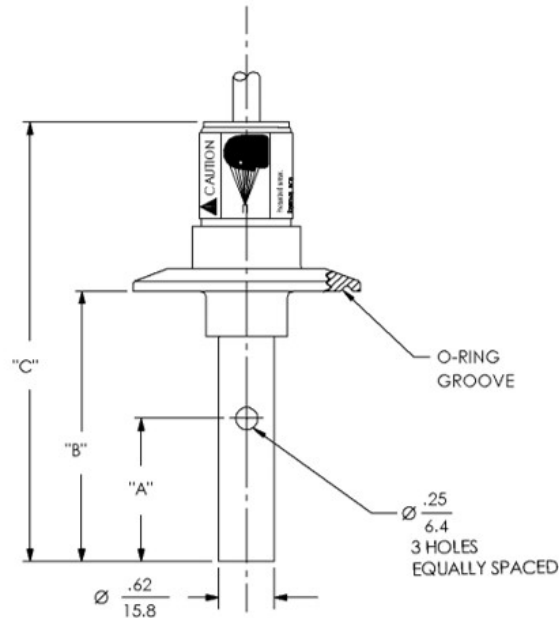

403-11, 12, 13

MODEL NO	"A"		"B"		"C"	
	INCH	MM	INCH	MM	INCH	MM
403-11 standard length	1.59	40.4	3.00	76.2	4.88	124.0
403-12 standard length	0.67	17.0	1.62	41.1	3.50	88.9
403-13 standard length	0.67	17.0	2.13	54.1	4.01	101.9
403-11 extended length (-36)	1.59	40.4	6.00	152.4	7.88	200.2
403-12 extended length (-36)	0.67	17.0	6.00	152.4	7.88	200.2
403-13 extended length (-36)	0.67	17.0	6.00	152.4	7.88	200.2



MODEL NO.	FITTING SIZE	FLANGE			
		"A" DIAMETER		"B" DIAMETER	
		INCH	mm	INCH	mm
403-()-20	1 1/2 INCH	1.98	50.3	.80	20.3
403-()-21	2 INCH	2.50	63.5	.90	22.9

Figure 3. Rosemount 403VP Sensor Dimensional Drawings

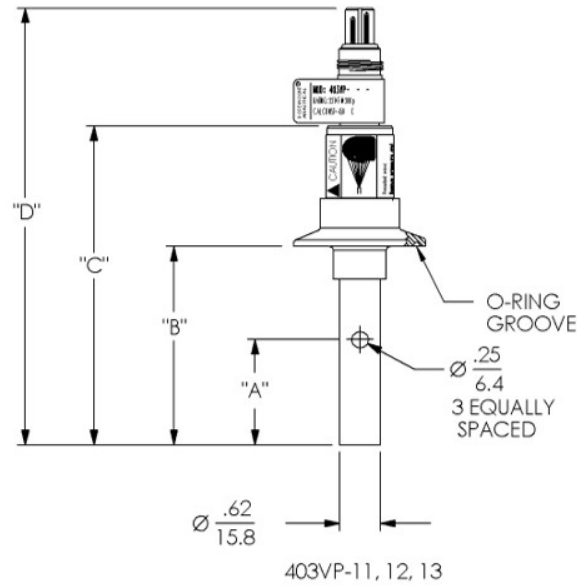


TABLE 1

MODEL NO	"A"		"B"		"C"		"D"	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM
403VP-11 standard length	1.59	40.4	3.00	76.2	4.80	121.9	6.60	167.6
403VP-12 standard length	0.67	17.0	1.62	41.1	3.44	87.4	5.24	133.1
403VP-13 standard length	0.67	17.0	2.13	54.1	3.95	100.3	5.75	146.1
403VP-11 extended length (-36)	1.59	40.4	6.00	152.4	7.80	198.1	9.60	243.8
403VP-12 extended length (-36)	0.67	17.0	6.00	152.4	7.80	198.1	9.60	243.8
403VP-13 extended length (-36)	0.67	17.0	6.00	152.4	7.80	198.1	9.60	243.8




TABLE 2

MODEL NO	FITTING SIZE	"A" FLANGE DIAMETER		"B" FLANGE DIAMETER	
		INCHES	mm	INCHES	mm
403VP-()-20	1 1/2 INCHES	1.98	50.3	.80	20.3
403VP-()-21	2 INCHES	2.50	63.5	.90	22.9

Accessories

Table 4. Rosemount 403/403VP Sensor accessories information

Part number	Description
23550-00	Interconnecting cable, VP 6, 2.5 ft (0.8 m)
23747-04	Interconnecting cable, VP 6, 4 ft (1.2m)
23747-02	Interconnecting cable, VP 6, 10 ft (3.0 m)
23747-07	Interconnecting cable, VP 6, 15 ft (4.6 m)
23747-08	Interconnecting cable, VP 6, 20 ft (6.1 m)
23747-09	Interconnecting cable, VP 6, 25 ft (7.6 m)
23747-10	Interconnecting cable, VP 6, 30 ft (9.1 m)
23747-03	Interconnecting cable, VP 6, 50 ft (15.2 m)
23747-11	Interconnecting cable, VP 6, 100 ft (30.5 m)
23550-00	Junction Box without Preamplifier
9200275	Interconnect Extension Cable, Unprepped (for use with Junction Box)
23747-00	Interconnect Extension Cable, Prepped (for use with Junction Box)
05010781899	Conductivity standard SS-6, 200 μ S/cm, 32 oz (0.95 L)
05010797875	Conductivity standard SS-6A, 200 μ S/cm, 1 gal (3.78 L)
05010782468	Conductivity standard SS-5, 1000 μ S/cm, 32 oz (0.95 L)
05010783002	Conductivity standard SS-5A, 1000 μ S/cm, 1 gal (3.78 L)
05000705464	Conductivity standard SS-1, 1409 μ S/cm, 32 oz (0.95 L)
05000709672	Conductivity standard SS-1A, 1409 μ S/cm, 1 gal (3.78 L)
05010782147	Conductivity standard SS-7, 5000 μ S/cm, 32 oz (0.95 L)
05010782026	Conductivity standard SS-7A, 5000 μ S/cm, 1 gal (3.78 L)

Engineering Specification

1. The sensor shall be suitable for the determination of electrolytic conductivity in water for injection and in any water purification installation where Tri Clamp fittings are used.
2. The sensor shall be available with either 1-½ inch or 2-inch 316 stainless steel sanitary flanges.
3. Electrodes shall be titanium.
4. The insulator shall be PCTFE and shall be compliant with 21CFR177.1380.
5. The O-rings shall be EP and shall be compliant with 21CFR177.2600 and USP Class VI.
6. All wetted surfaces shall have a 16 micro inch (0.4 micrometer) Ra finish.
7. The sensor shall be available with either an integral cable or a Variopol quick disconnect fitting.
8. The sensor shall have an integral platinum RTD for temperature measurement.
9. The sensor shall be Rosemount 403 (integral cable) or 403VP (Variopol fitting) or approved equal.

Notes:

Global Headquarters

Emerson Automation Solutions

8200 Market Blvd

Chanhassen, MN 55317

+1 800 999 9307 or +1 952 906 8888

+1 952 949 7001

Liquid.CSC@Emerson.com

North America Regional Office

Emerson Automation Solutions

8200 Market Blvd.

Chanhassen, MN 55317, USA

+1 800 999 9307 or +1 952 906 8888

+1 952 949 7001

RMT-NA.RCCRFQ@Emerson.com

Latin America Regional Office

Emerson Automation Solutions

1300 Concord Terrace, Suite 400

Sunrise, FL 33323, USA

+1 954 846 5030

+1 954 846 5121

RFQ.RMD-RCC@Emerson.com

Europe Regional Office

Emerson Automation Solutions GmbH

Neuhofstrasse 19a P.O. Box 1046

CH 6340 Baar

Switzerland

+41 (0) 41 768 6111

+41 (0) 41 768 6300

RFQ.RMD-RCC@Emerson.com

Asia Pacific Regional Office

Emerson Automation Solutions Asia Pacific Pte Ltd

1 Pandan Crescent

Singapore 128461

+65 6777 8211

+65 6777 0947

Enquiries@AP.Emerson.com

Middle East and Africa Regional Office

Emerson Automation Solutions

Emerson FZE P.O. Box 17033,

Jebel Ali Free Zone - South 2


Dubai, United Arab Emirates

+971 4 8118100

+971 4 8865465


RFQ.RMTMEA@Emerson.com

 Analyticexpert.com

 [Linkedin.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)

 [Twitter.com/Rosemount_News](https://twitter.com/Rosemount_News)

 [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

 [Youtube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)

 [Google.com/+RosemountMeasurement](https://www.google.com/+RosemountMeasurement)

The Emerson logo is a trademark and service mark of Emerson Electric Co.
Rosemount and Rosemount logotype are trademarks of Emerson.
All other marks are the property of their respective owners.
© 2017 Emerson. All rights reserved.