



Committing to the future

testo 174T

Compact temperature data logging


... the only way to prove your cold chain is under control

NEW!

Free logger software download at...
www.testo.com

Accurate and reusable
temperature monitoring:

- view • analyze • report

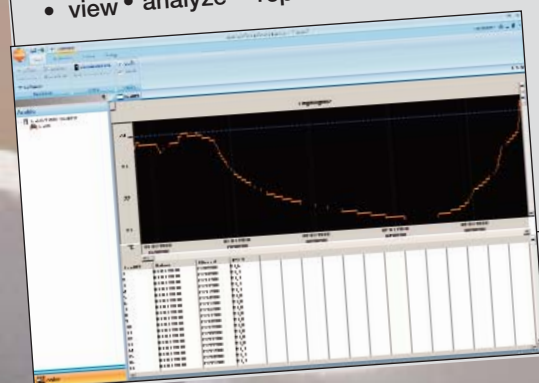



Temperature measurement with the testo 174T mini data logger



Actual Size

- Secure data protection, even with drained battery
- Large memory: up to 16,000 values
- Splashproof rating IP65
- Free software download at www.testo.com
- Large measuring range: -22 to +158 F
- Internal NTC sensor for high accuracy
- Measuring cycle: 1 min. to 24 hr. (user selectable)



compliant materials

testo 174T mini data logger, 1-channel, incl. wall bracket, battery (2 x CR 2032 lithium) and Certificate of Conformance

Part No. 0572 1560

testo 174T Starter Kit*, includes...

testo 174T mini data logger
1-channel, incl. USB interface for programming and reading out the logger, wall bracket, battery (2 x CR 2032 lithium) and Cert. of Conformance

Order. No. 0572 0561



* Download ComSoft Basic V5 software free of charge at: www.testo.com, or order software CD 0572 0580 separately

Technical data


Probe type	Internal NTC temperature sensor
Measuring range	-22 to +158 F (-30 to +70 °C)
Accuracy	±0.5 °C (-30 to +70 °C)
Resolution	0.1 °C
Operating temperature	-22 to +158 F (-30 to +70 °C)
Storage temperature	-40 to +158 F (-40 to +70 °C)
Battery type	2 x 3 V button cell (2 x CR 2032 lithium), user replaceable
Battery life	approx. 500 days (15 min measuring cycle, +25 °C)
Protection class	IP65
Meas. cycle	1 min to 24 hr (user selectable)
Memory	16,000 readings
Software	Operating System: Windows XP, Vista, Win7

testo inc. 40 White Lake Road Sparta, New jersey 07871
Telephone: Toll Free 1-800-227-0729 862-354-5001 Fax: 862-354-5020
E-mail: info@testo.com
Web: www.testo.com



The testo 174T mini data logger is ideal for temperature measurements in refrigerators, freezers, cold rooms and display cases

testo 174 logger software comsoft Basic V5

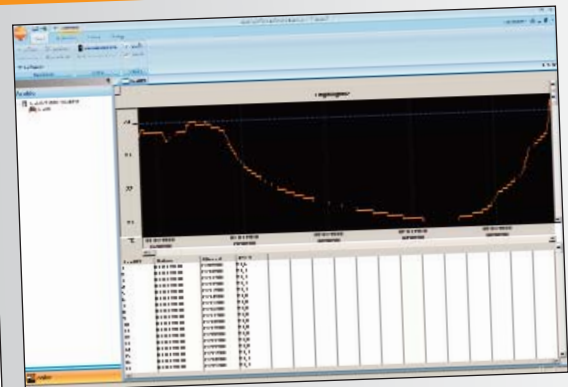

With the testo ComSoft Basic V5 software the 174 data logger can be configured and read out easily via USB interface. Measurement data can be reviewed and printed quickly and easily.

Accessories

	Order No.	
USB interface for programming and reading out testo 174T and 174H loggers	0572 0500	
ComSoft Basic V5 CD (if free download from website is not desired)	0572 0580	
Lithium battery CR 2032 button cell, please order 2 batteries per logger	0515 0028	
NIST calibration certificate temperature; 3 standard points per channel/instrument	400520 1901	