

Thermocouples

General Applications

Over 90 years of manufacturing, research and design makes Watlow a world class supplier of temperature measurement products. We have designed and manufactured millions of thermocouples for industrial and commercial equipment. People involved in critical process control of food, plastics and metal rely on our sensors.

We are ready to meet your sensing needs with our extensive offering of thermocouples. However, if the variations listed in this catalog are unable to satisfy your requirements, Watlow can custom manufacture sensors to your exacting specifications. Contact your Watlow representative for details.

Performance Capabilities

- Fiberglass insulated thermocouples are capable of temperatures up to 480°C (900°F) for continuous operation.

Features and Benefits

“Custom-tailored” standard products including:

- 32 standard sheath lengths
- Lead lengths from six to 360 inches
- Stainless steel braid or hose protection
- J, K, T and E calibrations
- Grounded, ungrounded and exposed junctions
- Flat and drill point
- Epoxy sealed cold ends
- Adjustable depths
- Flexible extensions
- Washers, nozzles and clamp bands
- Custom diameters
- PFA coated and stainless steel sheaths
- Straight, 45° bend or 90° bend
- Locking bayonet caps in standard, 12 mm and 15 mm



Custom manufactured thermocouples

- Units designed and built to your specifications

Applications

- Plastic injection molding machinery
- Food processing equipment
- Deicing
- Plating baths
- Industrial processing
- Medical equipment
- Pipe tracing control
- Industrial heat treating

- Packaging equipment
- Liquid temperature measurement
- Refrigerator temperature control
- Oven temperature control

Thermocouples

General Applications

Construction and Tolerances

Construction

Thermocouples feature flexible SERV-RITE® wire insulated with woven fiberglass or high temperature engineered resins. For added protection against abrasion, products can be provided with stainless steel wire braid and flexible armor. ASTM E 230 color-coding identifies standard catalog

thermocouple types (see reference chart on inside back cover).

The addition of a metal sheath over the thermocouple provides rigidity for accurate placement and added protection of the sensing junction. Mounting options include springs, ring terminals, specialized bolts, pipe style clamps and shims.

How to Order

- Determine style of thermocouple required
- Complete the eleven digit part number as determined by the following parameters:
 - Construction
 - Diameter
 - Calibration
 - Lead protection
 - Junction
 - Sheath length
 - Lead length
 - Terminations/options

Note: All eleven spaces must be filled in.

Availability

Rapid Ship sensors are available for same or next day shipment.


Preferred sensor options are available for shipment in approximately three days.

For **custom built** products consult factory for approximate shipment time.

Thermocouples

General Applications

Adjustable Spring Style

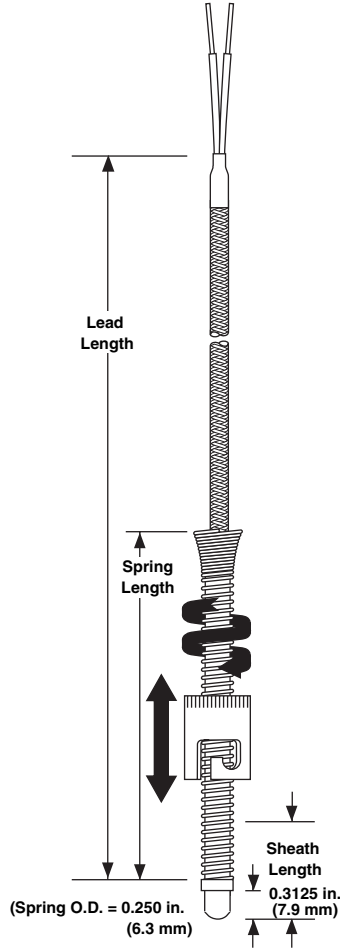

Adjustable spring style thermocouple fits a large range of hole depths. Bends to any angle, eliminating the requirement to stock numerous styles.

Rapid Ship Sensors

Rapid Ship sensors come with 24 gauge stranded fiberglass lead with stainless steel overbraided and grounded junction.

Calibration	Spring Length in. (mm)	Lead Length in. (mm)	Termination	
			Split Leads	Standard Connector
J	6 (152)	24 (610)	10DJSGB024A	10DJSGB024D
		48 (1219)	10DJSGB048A	10DJSGB048D
		72 (1829)	10DJSGB072A	10DJSGB072D
	12 (305)	96 (2438)	10DJSGB096A	10DJSGB096D
		24 (610)	11DJSGB024A	11DJSGB024D
		48 (1219)	11DJSGB048A	11DJSGB048D
		72 (1829)	11DJSGB072A	11DJSGB072D
		96 (2438)	11DJSGB096A	11DJSGB096D

Custom Ordering Information—Items in **Bolded Green Type** are preferred with shorter lead times.

1 2 3 4 5 6 7 8 9 10 11

D **B**

1-2. Construction Style

- 10 = Standard cap - 6 inch spring**
- 11 = Standard cap - 12 inch spring**
- 14 = 12 mm cap - 6 inch spring
- 15 = 15 mm cap - 6 inch spring
- 16 = 12 mm cap - 12 inch spring
- 17 = 15 mm cap - 12 inch spring

3. Sheath Diameter (inch), 316 SS

D = 3/16

4. Calibration

- J = Type J** T = Type T
- K = Type K** E = Type E

5. Lead Protection

- F = Fiberglass (24 gauge stranded)
- S = Fiberglass with stainless steel overbraided (24 gauge stranded)**
- P = Fiberglass (20 gauge stranded)
- B = Fiberglass with stainless steel overbraided (20 gauge stranded)**
- T = PFA (24 gauge stranded)
- U = PFA with stainless steel overbraided (24 gauge stranded)
- V = PFA (20 gauge stranded)
- W = PFA with stainless steel overbraided (20 gauge stranded)

6. Junction

- F = Grounded, flat tip
- G = Grounded, round tip**
- D = Grounded, drill point
- R = Ungrounded, flat tip
- U = Ungrounded, round tip**
- P = Ungrounded, drill point
- H = Grounded, round tip, dual element
- S = Ungrounded, round tip, dual element

7. Sheath Length (inch)

B = 1

8-10. Lead Length (whole inches)

012, 024, 036, 040, 048, 060, 072, 079, 096 and 120

Available lengths: 006 to 360, over 360 consult factory

11. Terminations/Options

- A = Standard, 2 1/2 inch split leads**
- B = 2 1/2 inch split leads with #6 spade lugs
- C = 2 1/2 inch split leads with #6 spade lugs and BX connector
- D = Standard male plug, quick disconnect**
- E = Standard female jack, quick disconnect
- F = Miniature male plug, quick disconnect
- G = Miniature female jack, quick disconnect
- H = 1/4 inch push-on connector