



VideoProbe accessories guide

VideoProbe accessories guide

Waygate Technologies' VideoProbes give you the highest image quality and measurement capability on your visual inspection device so you can be confident your inspections are thorough and accurate. To compliment the most advanced line of VideoProbes in the industry, we offer a comprehensive selection of optical tips and accessories so you can get the most out of your video borescope. We understand that performing a video borescope inspection requires a skilled technician putting in long hours in sometimes challenging environments. Deploying the proper accessory for the job can ensure inspections are performed properly, ergonomically, and efficiently.

Contents

VideoProbe accessories guide..... 2

Tip optics..... 4

3.9mm tips..... 5

3.9mm StereoProbe Measurement tips..... 5

4.0mm tips..... 6

4.0mm StereoProbe Measurement tips..... 6

6.1mm tips 7

6.1mm StereoProbe Measurement tips 9

6.1mm 3D Phase Measurement tips 9

6.2mm tips..... 10

6.2mm StereoProbe Measurement tips..... 10

8.4mm tips..... 11

8.4mm StereoProbe Measurement tips..... 12

Tip tools..... 13

Guide tubes 14

Protective Guide Tubes 14

Mechanical guide tubes..... 15

Non-articulating guide tubes..... 16

Dekoron bendable guide tubes..... 17

Cooling sleeves..... 18

Rigidizers..... 19

Rigidizers (Gripper included)20

Rigidizer kits..... 21

Grippers..... 22

Hands-free mounting 23

Working tools 27

Internal working tools 28

External working tools 31

Working tool pouch 33

Working tool kits 34

Centering devices 37

Measurement verification blocks..... 38

Software and upgrades 39

Cross platform accessories 42

Batteries and power supplies..... 45

Shipping and storage 46

Training and operating manuals 48

Tip optics

There are several features and accessories that make Waygate Technologies VideoProbes versatile inspection devices, but none may be more critical than the wide selection of optical tip adapters. Each optical tip uses a unique lens system to modify the image which provides the ability to perform a diverse set of inspections. Standard optical tips provide different angles of viewing and different focus ranges, while 3D Stereo and 3D Phase Measurement tips provide the ability to perform defect measurements with a fully surfaced 3D point cloud!

Optical tip selection:

Before performing an inspection, it is essential that the proper optical tip has been selected. There are certain variables within each application that will help you to determine which tip is best for the inspection. The three main variables that must be determined when selecting an optical tip are listed in Figure 1. Each tip features a unique direction of view (DOV), depth of field (DOF) and field of view (FOV).

Application variables	Optical tip specifications	
Does the application require a unique angle of viewing?	Direction of view	DOV
What is the approximate distance that the optical tip will be from the inspection target?	Depth of field	DOF
How wide of a viewing angle does the inspection require?	Field of view	FOV

Figure 1

Depth of field:

Depth of field is the object distance range, which the image resolves as sharp. This is a range in which an object will appear in focus. When using a VideoProbe™, in order to appear in focus, the target object must be within the optical range. Anything lying outside the DOF will be out of focus and will appear blurry. Figure 2 illustrates Depth of Field and show a range of focus that is very short.

Magnification:

Magnification is the amount larger an object appears through the lens system as compared to its actual size. Magnification is directly related to Field of View, the smaller the FOV the larger something will appear in it.

Field of view:

Field of view is the angular extent of the observable target that can be seen at a given moment. A large field of view means you can see a large area. Conversely, a small field of view means you can only see a small area.

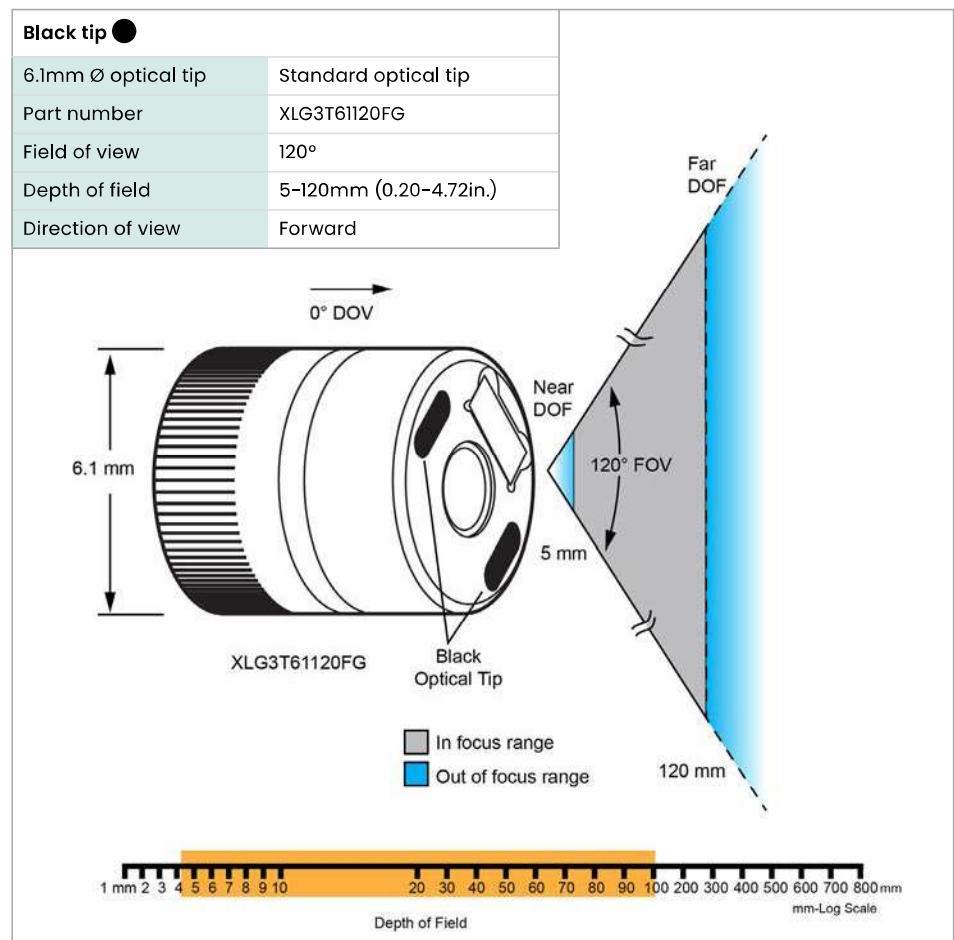


Figure 2

3.9mm tips

		Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
		PXT480FG	None	80 degrees	6-80	0.24-3.15	0 degrees
		PXT490FN	Orange	90 degrees	3-40	0.12-1.57	0 degrees
		PXT490SN	Red	90 degrees	2-16	0.08-0.63	90 degrees
		PXT480SG	Brown	80 degrees	4-80	0.16-3.15	90 degrees
Kit part number	PXT4SET	PXT490FN	Orange	90 degrees	3-40	0.12-1.57	0 degrees
		PXT480SG	Brown	80 degrees	4-80	0.16-3.15	90 degrees
		PXT490SN	Red	90 degrees	2-16	0.08-0.63	90 degrees
Kit part number	PXTM4SET ST	PXTM45050FG	Black	50/50 degrees	5-45	0.20-1.77	0 degrees
		PXTM45050SG	Blue	50/50 degrees	4-45	0.16-1.77	90 degrees

3.9mm StereoProbe Measurement tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	PXTM45050FG	Black	50/50 degrees	5-45	0.20-1.77	0 degrees
	PXTM45050SG	Blue	50/50 degrees	4-45	0.16-1.77	90 degrees

Tip optics

4.0mm tips

		Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
		T4080FF	None	80 degrees	35-inf.	1.38-inf.	0 degrees
		T40120SF	Blue	120 degrees	6-inf.	0.24-inf.	90 degrees
		T40115FN	Black	115 degrees	4-inf.	0.16-inf.	0 degrees
		T40115SN	Red	115 degrees	1-30	0.04-1.18"	90 degrees
Kit part number	MVIQAT4SET	T40115FN	Black	115 degrees	4-inf.	0.16-inf.	0 degrees
		T40115SN	Red	115 degrees	1-30	0.04-1.18	90 degrees
		T40120SF	Blue	120 degrees	6-inf.	0.24-inf.	90 degrees
Kit part number	MVIQAT4SET ST	TM405555FG	Black	55/55 degrees	5-inf.	0.2-inf.	0 degrees
		TM405555SG	Blue	55/55 degrees	4-inf.	0.16-inf.	90 degrees

4.0mm StereoProbe Measurement tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	TM405555FG	Black	55/55 degrees	5-inf.	0.2-inf.	0 degrees
	TM405555SG	Blue	55/55 degrees	4-inf.	0.16-inf.	90 degrees

6.1mm tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	XLG3T6150FG	White	50 degrees	12-200	0.47-7.87	0 degrees
	XLG3T6180FN	Orange	80 degree	3-20	0.12-0.79	0 degrees
	XLG3T6190FF	Yellow	90 degrees	20-inf.	0.79-inf.	0 degrees
	T6165FF	Orange and blue	65 degrees	65-inf.	2.56-inf.	0 degrees
	XLG3T6150FF	None	50 degrees	50-inf.	1.97-inf.	0 degrees
	T6150FF-1	None (Sealed Window)	50 degrees	50-inf.	1.97-inf.	0 degrees
	T6150FF	None	50 degrees	50-inf.	1.97-inf.	0 degrees
	T6150HP	None	50 degrees	50-inf.	1.97-inf.	0 degrees
	XLG3T61120FG	Black	120 degrees	5-120	0.20-4.72	0 degrees
	T61120FF	Gray	120 degrees	20-inf.	0.79-inf.	0 degrees

6.1mm tips

		Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
		XLG3T6I50FB	Purple	50 degrees	12-80	0.47-3.15	45 degrees
		XLG3T6I50SF	Brown	50 degrees	45-inf.	1.77-inf.	90 degrees
		XLG3T6I50SG	Green	50 degrees	9-160	9.35-6.30	90 degrees
		XLG3T6I120SG	Blue	120 degrees	4-100	0.16-3.94	90 degrees
		XLG3T6I80SN	Red	80 degrees	1-20	0.04-0.79	90 degrees
Kit part number	XLG3T6ISET	XLG3T6I120FG	Black	120 degrees	5-120	0.20-4.72	0 degrees
		XLG3T6I80FN	Orange	80 degrees	12-80	0.47-3.15	0 degrees
		XLG3T6I50SF	Brown	50 degrees	45-inf.	1.77-inf.	90 degrees
		XLG3T6I120SG	Blue	120 degrees	4-100	0.16-3.94	90 degrees
		XLG3T6I80SN	Red	80 degrees	1-20	0.04-0.79	90 degrees
		XLG3T6I50FG	White	50 degrees	12-200	0.47-7.87	0 degrees
		XLG3T6I90FF	Yellow	90 degrees	20-inf.	0.79-inf.	0 degrees
		XLG3T6I50FB	Purple	50 degrees	12-80	0.47-3.15	45 degrees
		XLG3T6I50SG	Green	50 degrees	9-160	0.35-6.30	90 degrees

6.1mm tips

6.1mm StereoProbe Measurement tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	XLG3TM616060FG	Black	60/60 degrees	4-80	0.16-3.15	0 degrees
	XLG3TM615050SG	Blue	50/50 degrees	2-50	0.08-1.97	90 degrees

6.1mm 3D Phase Measurement tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	XL4TM61105FG	Black	105 degrees	8-250	0.31-9.84	0 degrees
	XL4TM61105SG	Blue	105 degrees	7-250	0.27-9.84	90 degrees
	XL4TM61105SF	Green	105 degrees	15-inf.	0.59-inf.	90 degrees
	XL4TM61105FN	Orange	105 degrees	3-120	12-4.72	0 degrees
	XL4TM61105SN	Red	105 degrees	2-20	(.08-79)	90 degrees
	XL4TM61105FF	Yellow	105 degrees	15-inf	(0.59-inf)	0 degrees

6.2mm tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	PXT62120FF	Yellow	120 degrees	25-inf.	0.98-inf.	0 degrees
	PXT62120SN	Blue	120 degrees	5-inf.	0.20-inf.	90 degrees
	PXT6240FF	None	40 degrees	100-inf.	3.94-inf.	0 degrees
	PXT62120FN	Black	120 degrees	4-190	0.16-3.15	0 degrees
	T62120FN*	Black	120 degrees	2-200	0.08-7.87	0 degrees
	T62120FF*	Yellow	120 degrees	15-inf.	0.59-inf.	0 degrees
	T6280SF*	Green	80 degrees	15-inf.	0.59-inf.	90 degrees
	T62120SN*	Blue	120 degrees	6-inf.	0.24-inf.	90 degrees

6.2mm StereoProbe Measurement tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	PXTM626060FG	Black	60 degrees	4-80	0.16-3.15	0 degrees
	PXTM626060SG	Blue	60 degrees	4-80	0.16-3.15	90 degrees
	TM626060FN*	Black	60/60 FWD degrees	2-200	0.08-7.87	0 degrees
	TM626060SN*	Blue	60/60 SIDE degrees	2-200	0.08-7.87	90 degrees

** tips available for MVIQJP6235 only

8.4mm tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	XLG3T8440FF	None	40 degrees	250-inf.	9.84-inf.	0 degrees
	XLG3T84120FN	Black	120 degrees	5-200	0.20-7.87	0 degrees
	XLG3T84120SN	Blue	120 degrees	4-200	0.16-7.87	90 degrees
	XLG3T8440FG	White	40 degrees	80-500	3.15-19.68	0 degrees
	XLG3T8440SF	Brown	40 degrees	250-inf.	9.84-inf.	90 degrees
	XLG3T8480FG	Yellow	80 degrees	25-500	0.98-19.68	0 degrees
	XLG3T8480SG	Green	80 degrees	25-500	0.98-19.68	90 degrees
	T84120FF	Orange and blue	120 degrees	20-inf.	0.79-inf.	0 degrees

8.4mm tips

		Part Number	Color	FOV	DOF (mm)	DOF (in)	DOV
Kit part number	XLG3T84SET	XLG3T8480FG	Yellow	80 degrees	25-500	0.98-19.68	0 degrees
		XLG3T84120FN	Black	120 degrees	5-200	0.20-7.87	0 degrees
		XLG3T8440SF	Brown	40 degrees	250-inf.	9.84-inf.	90 degrees
		XLG3T8480SG	Green	80 degrees	25-500	0.98-19.68	90 degrees
		XLG3T84120SN	Blue	120 degrees	4-200	0.16-7.87	90 degrees

8.4mm StereoProbe Measurement tips

	Part number	Color	FOV	DOF (mm)	DOF (in)	DOV
	XLG3TM846060FG	Black	60/60 degrees	4-50	0.16-1.97	0 degrees
	XLG3TM846060SG	Blue	60/60 degrees	4-50	0.16-1.97	90 degrees

Tip tools

Optical tip tools are designed to make it easy to attach and remove 3.9mm or 4.0mm optical tips. Each 3.9mm and 4.0mm tip is sold standard with a dedicated tip tool which also serves to store and protect the tip.



Part number	Color	Description
PXT480FG-T	None	Used for installation and removal of head guard for 3.9mm VideoProbe
PXT480SG-T	Brown	Used for installation and removal of PXT480SG for 3.9mm VideoProbe
PXT490FN-T	Orange	Used for installation and removal of PXT490FN for 3.9mm VideoProbe
PXT490SN-T	Red	Used for installation and removal of PXT490SN for 3.9mm VideoProbe
PXTM45050FG-T	Black	Used for installation and removal of PXTM45050FG for 3.9mm VideoProbe
PXTM45050SG-T	Blue	Used for installation and removal of PXTM45050SG for 3.9mm VideoProbe
T4080FF-T	None	Used for installation and removal of 4.0mm head guard
T40115FN-T	Black	Used for installation and removal of T40115FN, 4.0mm forward viewing optical tip
T40115SN-T	Red	Used for installation and removal of T40115SN, 4.0mm side viewing optical tip

Guide tubes

Guide tubes make it easier to navigate challenging inspection paths such as complex bends or gaps while providing an added layer of protection for the insertion tube. Once a particular diameter and length is selected, guide tubes are compatible with all Waygate Technologies VideoProbes as a cross platform accessory.

Protective Guide Tubes

Kit Applicability

Frequent inspections of static engine components such as high pressure nozzles, stator vanes, and combustion chambers can lead to accelerated wear on videoprobes. To address this challenge, Waygate Technologies offers a range of Protective Guide Tubes designed to reduce the cost of ownership by extending the operational life of 6.1mm videoprobes.

These protective sleeves are engineered for seamless integration with the Gripper, enabling intuitive manipulation of both the guide tube and the probe during inspection.

The distal end of each sleeve is reinforced with a specialized resin treatment to prevent fiber splay, ensuring durability and consistent performance even under repeated use.

Inspection Versatility

To meet the diverse demands of inspections, Protective Guide Tubes are available in multiple lengths. Whether conducting full annular inspections of gas turbine components, or navigating into engine stages prone to mechanical wear, these sleeves provide the reach and resilience required for reliable performance.



Part Number	Outer Diameter*	Working Length	Inner Diameter
GTN-NM84033-9593	8.4mm / 0.33in	0.33m / 12.99in	all guide tubes will accept 6.1mm probe
GTN-NM84075-9594	8.4mm / 0.33in	0.75m / 29.53in	all guide tubes will accept 6.1mm probe
GTN-NM84270-9595	8.4mm / 0.33in	2.70m / 106.30in	all guide tubes will accept 6.1mm probe

*Resin terminus diameter 9.0mm +/- 0.5mm

*Gripper sold separately (Part Number XA-GRIP6, 6.1mm/6.2mm Gripper with 1/4"-20 insert)

Mechanical guide tubes

Mechanical guide tubes offer the ability to articulate the guide either 2-way or 4-ways allowing the user to navigate the most challenging inspection paths. Each mechanical guide tube comes with a durable polyurethane impregnated outer tungsten braid and steel internal monocoil for added crush resistance.



Part number	Length
MECHGTUBE-8536	13.7mm (0.539") x 8 ft (96")
MECHGTUBE-8537	13.7mm (0.539") x 19 ft (228")
MECHGTUBE-8538	10.7mm (0.421") x 2m (78.74")
MECHGTUBE-8539	10.7mm (0.421") x 3m (118.11")
MECHGTUBE-8559	13.7mm (0.539") x 2.75m (108.27")
MECHGTUBE-8560	13.7mm (0.539") x 2.0m (78.74")
MECHGTUBE-8649	10.7mm (0.421") x 3.0m (118.11"), R&P
MECHGTUBE-8662	10.7mm (0.421") x .8m (31.5)
MECHGTUBE-8686	10.7mm (0.421") x 2.4m (94.49")
MECHGTUBE-8742	10.7mm (0.421") x 3.35m (131.89")
MECHGTUBE-8802	9.4mm (0.370") x 2.8m (110.24")
MECHGTUBE-8832	6mm (0.236") x 12m (472.44"), W/WC

Non-articulating guide tubes

Non-articulating guide tubes are strong and flexible. Made from the same materials as Waygate Technologies' VideoProbe insertion tubes.



Part number	Outer Diameter	Length	Probe Compatibility
GTN-415	8.4mm	0.33m	4mm x 1.5m
GTN-415-8976	8.4mm	0.75m	6.1mm x 1.5m
GTN-415-55D-8977	8.4mm	2.70m	6.1mm x 1.5m*
GTN-420	6.1mm	2.0m	4mm x 2.0m
GTN-425	6.1mm	2.5m	4mm x 2.5m
GTN-430	6.1mm	3.0m	4mm x 3.0m
GTN4-8933	4mm	10.6m	4mm x 10.6m
GTN-515	8.4mm	1.5m	5mm x 1.5m
GTN-520	8.4mm	2.0m	5mm x 2.0m
GTN-530	8.4mm	3.0m	5mm x 3.0m
GTN-615	10mm	1.5m	6.1mm x 1.5m
GTN-620	10mm	2.0m	6.1mm x 2.0m
GTN-625	10mm	2.5m	6.1mm x 2.5m
GTN-630	10mm	3.0m	6.1mm x 3.0m
GTN-645	10mm	4.5m	6.1mm x 4.5m
GTN-660	10mm	6.0m	6.1mm x 6.0m
GTN-675	10mm	7.5m	6.1mm x 7.5m
GTN6-8934	6.1mm	6mm	6.1mm x 6m**
GTN-815	12.7mm	1.5m	8.4mm x 1.5m
GTN-820	12.7mm	2.0m	8.4mm x 2.0m
GTN-825	12.7mm	2.5m	8.4mm x 2.5m
GTN-845	12.7mm	4.5m	8.4mm x 4.5m
GTN-860	12.7mm	6.0m	8.4mm x 6.0m
GTN-875	12.7mm	7.5m	8.4mm x 7.5m
GTN-6100-8923	6.1mm	10m	6.1mm x 10m
GTN-61120-8924	6.1mm	12m	6.1mm x 12m

*more rigid | **pushable

Dekoron bendable guide tubes

Provide both rigidity and flexibility to your VideoProbe insertion tube with a bendable Dekoron Guide Tube. Manually bend the guide tube in nearly any configuration and it will hold its position to allow for more control, precision, and protection for the insertion tube when delivering it into the application.



Part number	Description
GTD-400S	Dekoron guide tube attached to 3.9mm tube gripper Includes: GTD-600 Dekoron bendable tubing Supports 3.9mm & 4.0mm VideoProbes Guide tube length: 3.0m (9.75 ft.)* XA131: 3.9mm tube gripper
GTD-600	Dekoron bendable tubing Sold per foot Outer diameter 9.5mm (.375") Supports 3.9mm (0.1534") & 5.0mm (0.197") VideoProbes.
GTD-600S	Dekoron guide tube attached to 6.1mm (0.24") tube gripper Includes: GTD-800 Dekoron bendable tubing Outer diameter ~12.7mm (~.512") Supports 6.1mm (0.24"), 6.2mm (0.244") & 8.4mm (0.301") Ø VideoProbes XA118 6.1mm (0.24") tube gripper Guide tube length: 6.6m (21.7ft)
GTD-800	Dekoron bendable tubing Sold per foot Outer diameter 12.7mm (.500") Supports 6.1, 6.2 & 8.4mm Ø VideoProbes
GTD-800S	Dekoron guide tube attached to 8.4mm tube gripper. Includes: GTD-800 Dekoron bendable tubing. Outer diameter ~12.7mm (~.512") Supports 6.1, 6.2 & 8.4mm Ø VideoProbes. XA125 8.4mm tube gripper Guide tube length 6.6m (21.7ft)
856A1310G01	Custom guide tube kit with a blue molded plastic (not Dekoron) custom guide tube and a steel straightening rod for CFM56 HPT inspections
856A1351P01	Red molded plastic (not Dekoron) custom guide tube for CFM56 HPT inspections

* Note: Distal Length can be cut to length required.

Cooling sleeves

A tungsten braided insertion tube sleeve that allows for use of a VideoProbe in temperatures up to 300 °F (149 °C). The sleeve connects to a shop air supply requiring 80-120 psi to provide active cooling down the sleeve surrounding the VideoProbe insertion tube and camera head. Each cooling sleeve comes standard with the air valve assembly, air regular assembly, and an air hose to connect to air supply. All components are shipped in a rugged shipping and storage case with dedicated foam cutouts.



Part number	Length	Diameter
XLCOOLTUBE-8506	3m (118.11")	6.1mm (0.240")
XLCOOLTUBE-8668	2m (78.74")	10.7mm (0.421")
XLCOOLTUBE-8789	4.5m (177.17")	12.7mm (0.5")
XLCOOLTUBE-8792	2m (78.74")	12.7mm (0.5")
XLCOOLTUBE-8506	3m (118.11")	6.1mm (0.240")
XLCOOLTUBE-8668	2m (78.74")	10.7mm (0.421")
XLCOOLTUBE-8789	4.5m (177.17")	12.7mm (0.5")

Rigidizers



A stainless steel rigid guide tube that turns a flexible VideoProbe into a rigid scope providing control and protection for the insertion tube. When used with tube grippers and access port couplers a rigidizer allows for hands free probe positioning. Once a particular diameter and length is selected, rigidizers are compatible with all Waygate Technologies VideoProbes as a cross platform accessory.

Part number	Length	Diameter
GTR-411	6" (152 mm)	4mm
GTR-413	12" (305 mm)	4mm
GTR-415	16.75" (425 mm)	4mm
GTR-416	18" (457 mm)	4mm
GTR-601	6" (152 mm)	6mm
GTR-603	12" (305 mm)	6mm
GTR-605	16.75" (425 mm)	6mm
GTR-606	24" (610 mm)	6mm
GTR-612	48" (1219 mm)	6mm
GTR-801	6" (152 mm)	8mm
GTR-803	12" (305 mm)	8mm
GTR-805	16.75" (425 mm)	8mm
GTR-806	24" (610 mm)	8mm
GTR-812	48" (1219 mm)	8mm

Rigidizers (Gripper included)

Part number	Length	Diameter	Gripper
GTR-411S	6" (152 mm)	4 mm	XA-GRIP4
GTR-413S	12" (305 mm)	4 mm	XA-GRIP4
GTR-415S	16.75" (425 mm)	4 mm	XA-GRIP4
GTR-416S	18" (457 mm)	4 mm	XA-GRIP4
GTR-601S	6" (152 mm)	6mm	XA-GRIP6
GTR-603S	12" (305 mm)	6mm	XA-GRIP6
GTR-605S	16.75" (425 mm)	6mm	XA-GRIP6
GTR-606S	24" (610 mm)	6mm	XA-GRIP6
GTR-612S	48" (1219 mm)	6mm	XA-GRIP6
GTR-801S	6" (152 mm)	8mm	XA-GRIP8
GTR-803S	12" (305 mm)	8mm	XA-GRIP8
GTR-805S	16.75" (425 mm)	8mm	XA-GRIP8
GTR-806S	24" (610 mm)	8mm	XA-GRIP8
GTR-812S	48" (1219 mm)	8mm	XA-GRIP8

Rigidizer kits

Kit part number	Length	Diameter	Gripper
GTR4-KIT	6" (152 mm) 12" (305 mm) 18" (457 mm)	4mm	XA-GRIP4
GTR6-KIT	6" (152mm) 12" (305 mm) 18" (457mm)	6mm	XA-GRIP6
GTR8-KIT	6" (152mm) 12" (305 mm) 18" (457 mm)	8mm	XA-GRIP8

Grippers

Tube grippers use a compression fitting which when twisted locks the gripper in place and allows easy manipulation of the insertion tube providing precision control while reducing hand fatigue. Grippers are threaded for use with rigidizers, non-articulating guide tubes and access port couplers. Gripper are cross platform accessories and are compatible with all Waygate Technologies VideoProbes. All grippers include an embedded 1/4"-20 threaded stud to allow for easy connection to the magic arm for hands free use of the insertion tube



New part number	Description
XA-GRIP4	3.9mm/4.0mm Gripper with 1/4"-20 insert
XA-GRIP6	6.1mm/6.2mm Gripper with 1/4"-20 insert
XA-GRIP8	8.4mm Gripper with 1/4"-20 insert

Hands-free mounting

A wide range of accessories specifically designed to allow use of Waygate Technologies video borescopes hands-free for improved efficiency and ergonomics. Whether it's a c-clamp or hook to mount the borescope handset to an engine, or a shoulder strap to take the weight off of the user's hands, there is an option for any application or environment.

	Part number	Description
	SA-C	Service parts for magic-arm assemblies. Clamp portion of magic arm kit (XA119S) includes gold quarter-twenty stud.
	XA-HOOK	Everest Mentor Handset Hook, QD
	XA BALL	Swivel ball mount with 1/4 x 20 adapter.
	XA203	Brass male fitting for XA BALL.
	XLGOABRO	XL Go handset holder with 1/4 x 20 female mount.
	XLGOALANYARD	Neck or shoulder strap with attached handset holder (XLGOABRO) for use with the XL family of products.
	XLGOAMAGARMKIT	Full-size Magic Arm mounting kit for XL family of products. Includes: XLGOABRO handset holder SA-A Variable friction Magic Arm SA-C Super Clamp.
	XLGOAMOUNTKIT	Mini magic arm hands free mount kit for use with the XL family of products. Kit containing SA-C, XA BALL, XA203 and XLGOABRO.

Hands-free mounting

	Part number	Description
	MVIQALANYARD	Shoulder strap with attached handset holder (MVIQBHOLDER) for a Mentor Visual iQ system.
	MFLALANYARD	Neck or shoulder strap with attached handset holder (MFLAHOLDER) for the Everest Mentor Flex.
	XA-STRAP	Everest Mentor Hanging Strap, QD
	XLGOABELTCLIP	Durable belt clip with attached handset holder (XLGOABRO) for an XL family of products
	MVIQAMOUNTKIT	Small hands free mount kit with swivel for Mentor Visual iQ VideoProbes that supports the equipment during inspection operations
	MFLAMOUNTKIT	Small hands free mount kit with moveable swivel for Everest Mentor Flex VideoProbes that supports the equipment during inspection operations. Includes c-clamp, swivel ball, and handset cradle with integrated kickstand.
	MVIQAMAGICARM	Full size hands free mount kit with moveable arm for Mentor Visual iQ VideoProbes that supports the equipment during inspection operations
	MFLAMAGICARM	Full size hands free mount kit with moveable arm for Everest Mentor Flex VideoProbes that supports the equipment during inspection operations. Includes c-clamp, full magic arm, and handset cradle with integrated kickstand.
	MVIQBHOLDER	Spare handset holder, used to hold handset when attached to hands free devices

Hands-free mounting

	Part number	Description
	MFLBMAGICARM	Everest Mentor Flex+ Magic Arm Mount Kit
	MFLAHOLDER	Everest Mentor Flex handset cradle. Includes integrated kickstand to provide optimal display viewing angle. Includes integrated 1/4"-20 mount screw and Quick Disconnect (QD) port for compatibility with Waygate Technologies hands free mounting accessories.
	MVIQCHOLDER	Mentor Visual iQ+ handset holder. Includes integrated kickstand to provide optimal display viewing angle. Includes integrated 1/4"-20 mount screw for compatibility with Waygate Technologies hands free mounting accessories.
	UG-MVIQA-QD	Quick disconnect mounting kit for MViQ enables use with hands free accessories utilizing QD connection point
	MFLACASE-POLEKIT	Telescoping handset mounting pole kit for Everest Mentor Flex. Designed to securely slide into place at the base of the carry-on case to allow for hands free use of the Mentor Flex. Includes telescoping pole, swivel ball, and Mentor Flex handset cradle (MFLAHOLDER). All items can be stored in the carry-on case.
	MVIQACASE-POLEKIT	Telescoping handset mounting pole kit for Everest Mentor Visual iQ+. Designed to securely slide into place at the base of the carry-on case to allow for hands free use of the Mentor Visual iQ+. Includes telescoping pole, swivel ball, and MViQ handset cradle (MVIQBHOLDER). All items can be stored in the carry-on case.
	MENTORCOCASE-POLE	Telescoping handset mounting pole (only) for Everest Mentor Flex or Mentor Visual iQ+. Designed to securely slide into place at the base of the carry-on case to allow for hands free use of the VideoProbe.
	MVIQA2.2HANDSFREE	1/4-20 Hands free adapter for use with MViQ handset and 2.2mm USB probe.
	MVIQA-IDICOV	IDI Pin cover kit for use with Handset and 2.2mm USB probe.

Hands-free mounting

	Part number	Description
	MFLBLANYARD	Everest Mentor Flex+ Handset Neck Strap
	MFLBCASE-POLEKIT	Everest Mentor Flex+ Handset Pole Kit
	MFLBHOLDER	Everest Mentor Flex+ Cradle & Kickstand
	MFLBMOUNTKIT	Everest Mentor Flex+ Handset Mount Kit

Working tools

Retrieval tools

Loose parts and foreign objects stuck inside piping or other confined spaces can cause serious damage to manufacturing, process and power generation systems. Waygate Technologies offers a complete line of external and internal retrieval tools to remove foreign objects from hard-to-reach areas—without requiring disassembly. Our specialized tools provide significant cost-savings by minimizing downtime and eliminating the need for additional equipment.

Internal working tools

Our 6.2mm ø VideoProbe insertion tube contains an internal working channel which allows for the insertion of special retrieval tools. Internal tools can also be used with non-working channel probes externally when combined with an external attachment kit (WT-1.4MMEXT KIT).

1.4mm internal working tools

	Part number	Diameter	Length
	WT-141432S	1.4mm (0.055")	Snare tool 2.6m (102.4") working length
	WT-141432K	1.4mm (0.055")	Snare tool 3.9m (121.6") working length
	WT-141432A	1.4mm (0.055")	Alligator tool 3.2m (126.1") working length
	WT-141432HC	1.4mm (0.055")	3.2m (126.1") working length
	WT-141432P	1.4mm (0.055")	Three-pronged gripper tool 3.2m (126.1") working length
	WT-141475A	1.4mm (0.055")	Alligator tool 7.5m (295.3") working length
	WT-141432S	1.4mm (0.055")	Snare tool 3.2m (126.1") working length
	WT-143026A	3.0mm (0.118")	Alligator tool 2.6m (102.4") working length
	WT-143032A	3.0mm (0.118")	Alligator tool 3.2m (126.1") working length
	WT-143526B	3.5mm (0.138")	Brush tool 2.6m (102.4") working length
	WT-143532B	3.5mm (0.138")	Brush tool 3.2m (126.1") working length
	WT-144026M	4.0mm (0.158")	Magnet tool 2.6m (102.4") working length

1.4mm internal working tools

	Part number	Diameter	Length
	WT-144032M	4.0mm (0.158")	Magnet tool 3.2m (126.1") working length
	WT141435P	1.4mm (0.055")	Three pronged gripper tool 4.4m (173.2") working length
	WT-148026M	8.0mm (.0315")	Magnet tool 2.6m (102.4") working length
	WT-148032M	8.0mm (.0315")	Magnet tool 3.2m (126.1") working length
	WT-141435A	1.4mm (0.055")	Alligator tool 3.5m (137.8") working length
	WT-143535B	1.4mm (0.055")	Brush tool 3.5m (137.8") working length
	WT-144035M	1.4mm (0.055")	Magnet tool 4m (157.5") working length
	WT-143035A	3.0mm (0.118")	Alligator tool 3.5m (137.8") working length
	WT-148035M	3.0mm (0.118")	Magnet tool 3.5m (137.8") working length
	WT-141435HC	1.4mm (0.055")	Hook Comparitor Cable, 3.5m (137.8") working length
	WT-C50	1.27mm (0.05")	Quantity 5
	WT-H	1.4mm (0.055")	Quantity 5
	WTH6	Working Tool Holder, 6.1mm Probe H x W equals 15.5mm x 11.5mm (.609" x .455")	Length equals ~ 32mm-36mm (1.250"-1.420"). Used for attaching any external retrieval tool to 6.1mm VideoProbe

Internal working tools

External attachment kit for 1.4mm tools  The image shows the components of the external attachment kit. It includes a black carrying case with the 'Veeva Technologies' logo, a clear plastic tube, a small black circular component, and a white instruction card with a diagram.	Part number: WT-1.4MMEXT KIT Description: External attachment kit to allow use of 1.4mm (0.055") working tools with any diameter VideoProbe. Working tool slides through the attached tube allowing free movement and articulation. Tubing outside diameter is 2.3mm and 3.8m in length. Application: Kit to allow attachments of internal working tools with any diameter VideoProbe Benefit: Allows user to utilize internal retrieval tools line with multiple VideoProbe diameters
--	--

External working tools

Quickly and easily clip external working tools onto small-diameter probes to achieve unrivaled retrieval capabilities with just one piece of equipment. Our complete line of external retrieval tools are compatible with Waygate Technologies 6.1mm ø or 8.4mm ø VideoProbes.

3.0mm external working tools

	Part number	Diameter	Length
	WT-304020B	4.0mm (0.157")	Wire basket tool 2.4m (94.5") working length
	WT-304020P	4.0mm (0.157")	Three-pronged gripper 2.4m (94.5") working length
	WT-304020S	4.0mm (0.157")	Snare tool 2.4m (94.5") working length
	WT-304030B	4.0mm (0.157")	Wire basket tool 3.3m (129.9") working length
	WT-304030P	4.0mm (0.157")	Three-pronged gripper 3.3m (129.9") working length
	WT-304030S	4.0mm (0.157")	Snare tool 3.3m (129.9") working length
	WT-304075B	4.0mm (0.157")	Wire basket tool 7.8m (307.1") working length
	WT-304075P	4.0mm (0.157")	Three-pronged tool 7.8m (307.1") working length
	WT-306075S	4.0mm (0.157")	Snare tool 7.8m (307.1") working length
	WT-306020F	6.0mm (0.236")	Fork and tine tool 2.4m (94.5") working length
	WT-306030F	6.0mm (0.236")	Fork and tine tool 3.3m (129.9) working length
	WT-306075F	6.0mm (0.236")	Fork and tine tool 7.8m (307.1") working length

3.0mm external working tools

	Part number	Diameter	Length
	WT-308020A	8.0mm (0.315")	Alligator tool 2.4m (94.5") working length
	WT-308020M	8.0mm (0.315")	Magnet tool 2.4m (94.5") working length
	WT-308030A	8.0mm (0.315")	Alligator tool 3.3m (129.9") working length
	WT-308030M	8.0mm (0.315")	Magnet tool 3.3 m (129.9") working length
	WT-308020C22	8.0mm (0.315")	Wire cutting tool 2.4m (94.5") working length cuts up to 22 gage wire

Working tool pouch

Part number	Diameter	Length
WT-POUCH32	7mm (0.276")	3.2m (126")
WT-TOOLPOUCH35	7mm (0.276")	3.2m (126")
WT-POUCH620	6mm (0.236")	2.4m (102.4")
WT-POUCH630	6mm (0.236")	3m (118.1")
WT-POUCH675	6mm (0.236")	7.5m (295.3")
WT-POUCH820	8mm (0.315")	2.0m (78.7")
WT-POUCH830	8mm (0.314961")	3.0m (118.11")
WT-POUCH875	8mm (0.315")	7.5m (295.3")

Working tool kits

Kit part number	Kit contents	Description
WT-620KIT	Includes one each of the following:	<i>*All tools listed below are 2.4m working length and come in a labeled pouch*</i>
	WT-308020A	8.0mm (0.315") alligator tool
	WT-306020F	6.0mm (0.236") fork and tine tool
	WT-308020M	8.0mm (0.315") magnet tool
	WT-304020P	4.0mm (0.157") three-pronged gripper tool
	WT-304020S	4.0mm (0.157") snare tool
	WT-304020B	4.0mm (0.157") four wire basket tool
	WT-POUCH620	pouch to hold 2.4m (102.4") working tools (quantity 6)
	WTH6	working tool holder, 6mm (0.236") probe
WT-630KIT	Includes one each of the following:	<i>*All tools listed below have a working length of 3.3 meters and come in a labeled pouch</i>
	WT-308030A	8.0mm (0.315") alligator tool
	WT-304030S	4.0mm (0.157") snare tool
	WT-304030P	4.0mm (0.157") three-pronged gripper
	WT-304030B	4.0mm (0.157") four wire basket tool
	WT-308030M	8.0mm (0.315") magnet tool
	WT-306030F	6.0mm (0.236") fork and tine tool
	WTH6 (quantity 6)	Working tool holder
	WT-POUCH630	Pouch to hold 3.3 (129.9") meter working tools for 6mm (0.236") x 3.0 meter (118.11") probes
WT-632KIT	Includes one each of the following:	<i>*All tools listed below have a working length of 3.3 meters and come in a labeled pouch</i>
	WT-C50	Assy comparator vial .050
	WT-141432A	1.4mm (0.055") alligator tool 3.2m
	WT-141432S	1.4mm (0.055") snare tool 3.2m
	WT-141432P	1.4mm (0.055") gripper tool 3.2m
	WT-143532B	3.5mm (0.138") brush tool 3.2m
	WT-144032M	4.0mm (0.157") magnet tool 3.2m
	WT-148032M	8.0mm (0.315") magnet tool 3.2m
	WT-143032A	3.0mm (0.118") alligator tool 3.2m
	WT-141432HC	Hook comparator cable 3.2m
	WT-H	Assy, hook vial

Working tool kits

Kit part number	Kit contents	Description
WT-675KIT	Includes one each of the following:	*All tools are 7.8 meters in length and come in a labeled pouch:
	WT-308075A	8.0mm (0.315") alligator tool
	WT-304075S	8.0mm (0.315") snare tool
	WT-304075P	4.0mm (0.157") three-pronged gripper tool
	WT-304075B	4.0mm (0.157") four wire basket tool
	WT-308075M	8.0mm (0.315") magnet tool
	WT-306075F	6.0mm (0.236") fork and tine tool
	WTH6 (quantity 6)	Working tool holder
	WT-POUCH675	Pouch to hold 7.8 meter working tools
WT-820KIT	Includes one each of the following:	*All tools are 2.4 meters in length and come in a labeled storage pouch
	WT-308020A	8.0mm (0.315") alligator tool 2.4m (94.49") working length
	WT-304020S	4.0mm (0.157") snare tool 2.4m working length
	WT-304020P	4.0mm (0.157") three-pronged gripper tool 2.4m working length
	WT-POUCH820	Pouch to hold 2.4 meter (94.49") working tools for 8mm x 2.0 meter (78.74") probes
	WT-308020M	8.0mm (0.315") magnet tool 2.4m (94.49") working length
	WT-306020F	6.0mm (0.236") fork and tine tool 2.4m (94.49") working length
	WT-304020B (quantity 6)	4.0mm (0.157") four wire basket tool 2.4m (94.49") working length
	WTH8	Working tool holder, 8mm (0.315") probe
WT-830KIT	Includes one each of the following:	*All tools are 3.3 meters in length and come in a labeled storage pouch
	WT-308030A	8.0mm (0.315") alligator tool 3.3m (129.921") working length
	WT-304030S	4.0mm (157.48") snare tool 3.3m (129.921") working length
	WT-304030P	4.0mm (157.48") three-pronged gripper tool 3.3m (129.921") working length
	WT-304030B	4.0mm (157.48") four wire basket tool 3.3m working length
	WT-308030M	8.0mm magnet tool 3.3m (129.921") working length
	WT-306030F	6.0mm (0.236") fork and tine tool 3.3m (129.921") working length
	WTH8 (quantity 6)	Working tool holder, 8mm (0.315") probe
	WT-POUCH830	Pouch to hold 3.3 meter (129.921") working tools for 8mm (0.315") x 3.0 meter (129.921") probes

Working tool kits

Kit part number	Kit contents	Description
WT-875KIT	Includes one each of the following:	<i>*All tools are 7.8 meters in length and come in a labeled storage pouch:</i>
	WT-308075A	8.0mm (0.315") alligator tool
	WT-304075S	4.0mm (0.157") snare tool
	WT-304075P	4.0mm (0.157") three-pronged gripper
	WT-308075M	8.0mm (0.315") magnet tool
	WT-306075F	6.0mm (0.236") fork and tine tool
	WT-304075B (quantity 6)	4.0mm (0.157") four wire basket tool
	WTH8	Working tool holder, 8mm (0.315") probe
	WT-POUCH875	Pouch to hold 7.8 meter (307.09") working tools
WTH6	WT-H (quantity 5)	Hook piece, 1.4mm (0.055") Length equals ~ 32mm - 36mm (1.250"-1.420")

Centering devices

Perform more efficient pipe inspections with these essential devices that hold the insertion tube centered inside the pipe allowing wide angle forward view inspection of the pipe surface or 90 degree viewing of orbital welds. Centering devices are cross platform accessories and are compatible with all Waygate Technologies VideoProbes.

	Part number	Diameter	Description
	CD6-060	0.6in (15.2mm)	For 6.1mm diameter VideoProbes. 0.6" diameter. Holds the VideoProbe up off the surface being inspected to provide better view.
	CD6-150	1.5in (38.1mm)	For 6.1mm diameter VideoProbes. 1.5" diameter. Holds the VideoProbe up off the surface being inspected to provide better view.
	CD8-150	1.5in (38.1mm)	For 8.4mm diameter VideoProbes. 1.5" diameter. Holds the VideoProbe up off the surface being inspected to provide better view.
	CD8-300	3.0in (76.2mm)	For 8.4mm diameter VideoProbes. 3" diameter. Holds the VideoProbe up off the surface being inspected to provide better view.

Measurement verification blocks

Verify that the system measures accurately with the Waygate technologies-supplied NIST traceable verification block before and after performing measurements.

Compatibility will be determined by tip diameter. Once a diameter is selected the verification blocks are cross platform.

Part number		Diameter
	3D-MEASBLOCK	3D measurement training block For use with 3D Phase Measurement, 3D stereo, traditional stereo, or comparison measurement.



Part number	Diameter
UG-VER2400B	3.9mm (0.154")
UG-VER2500B	5.0mm (0.196")
UG-VER2600C	6.0mm (0.236")
UG-VER2620B	6.2mm (0.244")
UG-XLG3TM84VER	8.4mm (0.331")
VER2400B	3.9mm (0.154")
VER2400C	4.0mm (0.157")
VER2500B	5.0mm (0.197")
VER2600D	6.1mm (0.240")
VER2600E	6.1mm (0.240")
VER2620B	6.2mm (0.244")
VER2300UV-9258	UV verification block for 3.9mm UV probes
VER2400UV-9196	UV verification block for 4.0mm UV probes
VER2600UV-9197	UV verification block for 6.1mm UV probes
VER2620UV-9198	UV verification block for 6.2mm UV probes
VER8400UV-9199	UV verification block for 8.4mm UV probes
XLG3TM84VER	8.4mm (0.331")

Software and upgrades

Waygate Technologies VideoProbes are scalable to allow users the opportunity to upgrade system capabilities over time to meet growing inspection needs. Whether the user would like to add 3D Phase Measurement software to their Mentor Visual iQ or Menu Directed Inspection (MDI) automated reporting software to their XL Detect+ VideoProbe, these upgrade packages make field installation simple.

Part number	Description
MVIQ-PODBASE3DPM	Basic measurement package including comparison measurement, Real 3D phase measurement and measurement types length, depth, area, point to line and angle. Truesight Imaging POD package including Brightness, Adaptive Noise Reduction (ANR), Distortion Correction, Long Exposure, Invert, Inverse+, Single View, Color Saturation, Darkboost, and Image Overlay. Also includes Image Rotation and Image Stitching
MVIQ-PODBASE3DST	Basic measurement package including comparison measurement, traditional stereo measurement, Real 3D stereo measurement and measurement types length, depth, area, point to line and angle. Truesight Imaging POD package including Brightness, Adaptive Noise Reduction (ANR), Distortion Correction, Long Exposure, Invert, Inverse +, Single View, Color Saturation, Darkboost, and Image Overlay. Also includes Image Rotation and Image Stitching
MVIQ-PODADV3DPM	Advanced measurement package including comparison measurement, Real 3D phase measurement and measurement types length, depth, area, point to line, angle, Area Depth Profile (ADP), Radius Gauge, Projected Plane (PPM), Blade Tip Clearance (BTC) missing corner and surface angle. Truesight Imaging POD package including Brightness, Adaptive Noise Reduction (ANR), Distortion Correction, Long Exposure, Invert, Inverse +, Single View, Color Saturation, Darkboost, and Image Overlay. Also includes Image Rotation and Image Stitching
MVIQ-PODADV3DST	Advanced measurement package including comparison measurement, traditional stereo measurement, Real 3D stereo measurement and measurement types length, depth, area, point to line, angle, Area Depth Profile (ADP), Radius Gauge, Projected Plane (PPM), Blade Tip Clearance (BTC), missing corner and surface angle. Truesight Imaging POD package including Brightness, Adaptive Noise Reduction (ANR), Distortion Correction, Long Exposure, Invert, Inverse +, Single View, Color Saturation, Darkboost, and Image Overlay. Also includes Image Rotation and Image Stitching
MVIQ-3DST	Provides 3D stereo measurement SW including point cloud visualization Available on Inspect and Touch versions of the Mentor Visual iQ platform
UG-MVIQ-3DST	Includes 3D point cloud visualization Available for fielded units, requires factory install Available on Inspect and Touch versions of the Mentor Visual iQ platform Must come in on RMA (returned materials authorization)
MVIQ-POD	Mentor Visual iQ probability of detection enhancement Includes high-dynamic range (HDR), adaptive noise reduction (ANR), distortion correction, and image presets factory install *Available on Inspect and Touch versions of the Mentor Visual iQ platform
UG-MVIQ-POD	Mentor Visual iQ probability of detection enhancement Includes high-dynamic range (HDR), adaptive noise reduction (ANR), distortion correction, and image presets Field upgrade Available on Inspect and Touch versions of the Mentor Visual iQ platform
MVIQ-ST	Mentor Visual iQ stereo measurement enhancement Factory install *Available on Inspect and Touch versions of the Mentor Visual iQ platform
UG-MVIQ-ST	Mentor Visual iQ stereo measurement enhancement Available for fielded units, requires factory install Available on Inspect and Touch versions of the Mentor Visual iQ platform Must come in on RMA (returned materials authorization)
MVIQ-3DPM	Provides 3D phase measurement SW including point cloud visualization Available on Inspect and Touch versions of the Mentor Visual iQ platform
UG-MVIQ-3DPM	Includes 3D point cloud visualization Available for fielded units, *requires factory install *Available on Inspect and Touch versions of the Mentor Visual iQ platform Must come in on RMA (returned materials authorization)

Software and upgrades

Part number	Description
MVIQ-NOIM	Mentor Visual iQ internal memory disable – factory install Disables the ability to store data to the internal drive.
UG-MVIQ-NOIM	Mentor Visual iQ internal memory disable – field upgrade Disables the ability to store data to the internal drive
MVIQ-NOUSB	Mentor Visual iQ USB memory disable – factory install Disables the ability to store data to the USB drives
UG-MVIQ-NOUSB	Mentor Visual iQ USB memory disable – factory install Disables the ability to store data to the USB drives
MVIQ-PPM	Mentor Visual iQ Software for projected plane measurement Requires 3D phase measurement (MVIQ-3DPM) or 3D stereo measurement (MVIQ-3DST) capable handset.
UG-MVIQ-PPM	Mentor Visual iQ Software for projected plane measurement Requires 3D phase measurement (MVIQ-3DPM) or 3D stereo measurement (MVIQ-3DST) capable handset Requires handset serial number upon order entry
UG-MVIQ-ADP	Mentor Visual iQ Software for area depth profile measurement Requires 3D phase measurement (MVIQ-3DPM) or 3D stereo measurement (MVIQ-3DST) capable handset Requires handset serial number upon order entry
MFL-NOIM	MFLEX/MFLEX+ Internal Memory Disable
UG-XLFL-ST	XL flex stereo measurement enhancement Available for fielded units, requires factory install Must come in on RMA for stereo measurement tip calibration
XLDE-MDI-11	MDI 1.1 helps guide an inspector through the inspection process and intelligently auto-generates a report MDI Builder software for the PC also included
UG-XLDE-MDI-11	MDI 1.1 guides an inspector through the inspection process and intelligently auto-generates a report MDI Builder software for the PC also included Comes with a software upgrade thumbdrive Requires handset serial number upon order
MVIQ-OVERLAY	Overlay feature for comparing a know image to a live inspection image
UG-MVIQ-OVERLAY	Field upgrade for overlay feature for comparing a know image to a live inspection image
UG-MVIQ-IMINSP	Mentor Visual iQ internal memory enablement for inspect model – field upgrade Enables 16 GB internal memory for MViQ Inspect model Requires device serial number upon order
MVIQ-32GB	32GB internal memory feature addition
MVIQ-DARKBOOST	Mentor Visual iQ software enhancement – factory install. Dark Boost is a live video processing function that digitally brightens darker areas in scenes with bright foreground surfaces or glare without overexposing or degrading the contrast of more uniform scenes.
UG-MVIQ-DARKBOOST	Mentor Visual iQ software enhancement – field upgrade. Dark Boost is a live video processing function that digitally brightens darker areas in scenes with bright foreground surfaces or glare without overexposing or degrading the contrast of more uniform scenes. Requires handset serial number upon order entry.
MVIQ-TIPCLEARNC	Mentor Visual iQ software enhancement – factory install. Blade Tip Clearance is a measurement type that is available with Real3D Stereo and or Real3D Phase measurement technologies. BTC automatically identifies the minimum, maximum and average clearance measurements for tip to shroud (blade tip clearance) inspections.
UG-MVIQ-TIPCLEARNC	Mentor Visual iQ software enhancement – field upgrade. Blade Tip Clearance is a measurement type that is available with Real3D Stereo and or Real3D Phase measurement technologies. BTC automatically identifies the minimum, maximum and average clearance measurements for tip to shroud (blade tip clearance) inspections. Requires handset serial number upon order entry.

Software and upgrades

Part number	Description
UG-MFL-3DST	Everest Mentor Flex Real3D Stereo Measurement including point cloud visualization. Measurement types included: Length, Point To Line, Depth, Area, Multi-Segment. Field Upgrade. Requires handset serial number upon order.
MFL-ST	Everest Mentor Flex Stereo Measurement enhancement. Factory install.
UG-MFL-ST	Everest Mentor Flex Stereo Measurement enhancement. Field upgrade. Requires handset serial number upon order.
UG-MFL-POD	MFLEX/MFLEX+ POD Package, Upgrade
UG-MFL-NOIM	MFLEX/MFLEX+ Internal Memory Disable, UG
MFL-POD	MFLEX/MFLEX+ POD Package, Factory

Cross platform accessories

Waygate technologies offers a wide range of purpose built accessories to compliment and add versatility to each VideoProbe. Cross Platform Accessories range from an access port coupler to a micro fiber optical tip cleaning kit to ensure clean tips and optimal image quality.

	Part number	Description
	XLGOA8GBTD	USB 2.0 thumb drive, 8 GB, external memory device Not compatible with the XLG3
	XLGOADOORKIT	Replacement door kit Includes: 815589 - right (USB) door, 815590 - left (mic-speaker) door
	XLGOAVISOR	Sun shield for XL Go when inspecting in sunlight.
	XLGOC8GBHD	8 GB external hard drive for use with the XL Go and XLGo+ VideoProbe.
	MVIQADP-VGA	Display port to VGA cable
	XA-VGA30	VGA cable for use with external monitor Length: 30 ft. (9.1m), Connects to Mentor Visual iQ with use of MVIQADP-VGA *sold separately*
	XA-HDMI	HDMI Cable, 6 ft.
	XA-USBC-CABLE	USB-C cable, 6.6 ft. (2m)

Cross platform accessories

	Part number	Description
	XA-CLEANKIT	Lens cleaning kit for VideoProbe tip optics includes: 5 packages of alcohol wipes and 1 package of cotton swabs Contents are packaged inside a small case with cleaning instruction label on the inside lid.
	114M2569	XA-CLEANKIT replacement pack: lens cleaning kit for VideoProbe tip optics Includes: 5 packages of alcohol wipes and 1 package of cotton swabs.
	XA-KEYBOARD	Mini keyboard for use with the following Waygate Technologies products. Comes standard with USB connector and adapter for PS2 connection. • Mentor Visual iQ • XL Flex & XL Flex+ • XL Detect & XL Detect+ • XL Vu VideoProbe • XL Lv VideoProbe • Ca-Zoom PTZ
	MVIQATD-2	Thumb drive containing the following: All translated languages of User's Manual and Quick Start Guides Inspection Manager 2.0 software for viewing and re-measurement of 3D phase measurement, 3D stereo measurement, StereoProbe measurement, and comparison measurement images.
	MVIQAUSB A-B	USB 3.0 A to B cable
	MVIQAUSB-ETHNET	USB to ethernet adapter cable
	MVIQAPOLE	Spare handset pole

Cross platform accessories

	Part number	Description
	MVIQABSA	Borescope adapter for the MViQ VideoProbe system. The MVIQABSA is a full VGA camera and light source for rigid borescopes and fiberscopes that provides the ability to utilize most UI functionality of the MViQ system The MVIQABSA includes borescope adapter, storage case and set-up guide Note: A borescope coupler is also required Please order separately one of the following part numbers: Part number: CCF28 Description: variable focus c-mount camera coupler, 28mm focal length (best for rigid borescopes > 4mm diameter) Part number: CCF35 Description: variable focus c-mount camera coupler, 35mm focal length (best for fiberscopes and 2.7mm dia. mini-rigid) Part number: CCF45 Description: variable focus c-mount camera coupler, 45mm focal length (best for mini-rigid borescopes and mini-semi-flexible fiberscopes <2mm)
	PROBE-HOLDER	VideoProbe Accessory Tool used to support and lock a 6.1mm or 6.2mm VideoProbe Insertion Tube into an access port. This compliant, urethane holder fits access ports from 10mm to 25mm in diameter. Color: Red
	MViQAPC100S	Access port adapter kit. Includes nylon pouch made to fit into bottom of Mentor Visual iQ Workstation case. Kit includes the follow access port adapters: A100016S150 -CP 1-16UNF1.5", A112512S150 -CP 1 1/8-12UNF1.5", A37524C150 -CP 3/8-24UNF3A1.5", A43820C150 -CP 7/16-20UNF3A1.5", A50020S150 -1.500X 1/2-20 X 1/2-13 ADAPTER, A50020S275 -CP 1/2-20UNF-2.75", A56318C150 -CP 9/16-18UNF3A1.5", A56318S150 -CP 9/16-18UNF1.5", A62518S150 -CP 5/8-18UNF1.5", A62518S300 -CP 5/8-18UNF3.0", A75016S150 - CP 3/4-16UNF1.5", A87514S150 -CP 7/8-14UNF1.5", XA125 -GRIPPER, 8MM.

Batteries and power supplies

Boost portability with a variety of light weight lithium ion batteries for your video borescope.

	Part number	Run Time
	XLGOABATTA	2 hr run time Compatible the following products; XL Flex, XL Flex+, XL Detect, XL Detect+, XL Vu, XL Vu+, XL Lv, XL Go, XL Go+
	XLGOABATTB	4 hr run time Compatible the following products; XL Flex, XL Flex+, XL Detect, XL Detect+, XL Vu, XL Vu+, XL Lv, XL Go, XL Go+
	MVIQBBATT	Lithium-ion Battery; MViQ+/MFLEX+ Gen2
	XLVUPWRBRK	AC power supply for corded version of XL Vu VideoProbe system
	XLGOACHGR	Battery charger for XLGOABATTA and XLGOABATTB, also provides AC power to operate XL Go Compatible the following products; XL Flex, XL Flex+, XL Detect, XL Detect+, XL Vu, XL Vu+, XL Lv, XL Go, XL Go+
	MVIQBCHARGER	MViQ+/MFLEX Charger, Output Isolated
	MVIQAPWRSTRAP	AC Power Cord Strain Relief

Shipping and storage

Shipping and storage offerings ranging from a durable case with wheels for your borescope system to a protective optical tip case with dedicated foam cutouts..

	Part number	Description
	MVIQACASE-WS	Spare work station shipping/storage case for use with Mentor Visual iQ VideoProbes
	MVIQAPRBCASE	Mentor Visual iQ QuickChange VideoProbe soft storage case fits lengths 2m-10m
	MVIQAACCPOUCH	Accessory storage pouch, fits in work station shipping storage case
	XLDETECTCASE	Storage for one XL Detect & XL Detect+ system, tip case, AC transformer, 2 or 4 hour spare battery, XL Detect handset holder, magic clamp, swivel ball, gripper, 12" rigidizer and owner's manual Comes standard with all XL Detect and XL Detect+ systems This case is compatible with all XL Detect and XL Detect+ VideoProbes.
	MVIQATIPCASE-40	4.0mm spare interchangeable optical tip storage case This case is compatible with all XL 4.0mm diameter optical tip adapters.
	MVIQATIPCASE-61	6.1mm spare interchangeable tip optics storage case This case is compatible with all 6.1mm diameter optical tip adapters.

Shipping and storage

	Part number	Description
	MVIQBCASE-CO	Spare Carry-on Shipping/Storage case for use with Mentor Visual iQ / Mentor Visual iQ+ VideoProbes
	MVIQACASE-CD	MViQ dual probe case kit
	MFLACASE-CO	Sturdy hard case to protect against shock, moisture and dust. Safely provides storage for one Everest Mentor Flex system, tip case, AC power supply, two spare 3-hour batteries, Mentor Flex handset cradle, magic clamp, swivel ball, gripper, 12" rigidizer, telescoping handset pole kit, rigid hook (XA-HOOK), and handset hanging strap (XA-STRAP).
	MFLCCASE-CO	Everest Mentor Flex+ Carry-on Case
	MFLCPRBCASE	Everest Mentor Flex+ Soft Probe Case
	MFLCCASE-DP	Everest Mentor Flex+ Dual Probe Case

Training and operating manuals

Live classroom training with a Waygate Technologies RVI expert covering topics ranging from 3D Phase Measurement to care and operation at the customer site or a Waygate Technologies facility.

VideoProbe operating manuals and Quick Start guides are offered in several different languages.



Mentor Visual IQ+ manuals

Part number	Description	Language
MVIQPMANUAL	User's Manual, hard copy	English
MVIQPMANUAL-DE	User's Manual, hard copy	German
MVIQPMANUAL-FR	User's Manual, hard copy	French
MVIQPMANUAL-JP	User's Manual, hard copy	Japanese
MVIQPMANUAL-ES	User's Manual, hard copy	Spanish
MVIQPMANUAL-KO	User's Manual, hard copy	Korean
MVIQPMANUAL-PB	User's Manual, hard copy	Brazilian Portuguese
MVIQPMANUAL-PL	User's Manual, hard copy	Polish
MVIQPMANUAL-RU	User's Manual, hard copy	Russian
MVIQPMANUAL-FN	User's Manual, hard copy	Finnish
MVIQPMANUAL-HG	User's Manual, hard copy	Hungarian
MVIQPMANUAL-AR	User's Manual, hard copy	Arabic
MVIQPMANUAL-CN	User's Manual, hard copy	Chinese
MVIQPMANUAL-CZ	User's Manual, hard copy	Czech
MVIQPMANUAL-IT	User's Manual, hard copy	Italian
MVIQPMANUAL-NL	User's Manual, hard copy	Dutch
MVIQPMANUAL-SV	User's Manual, hard copy	Swedish
MVIQPMANUAL-TR	User's Manual, hard copy	Turkish

Everest Mentor Flex manuals

Part number	Description	Language
MFLAMANUAL	User manual for Everest Mentor Flex, hard copy	English
MFLAMANUAL-DE	User manual for Everest Mentor Flex, hard copy	German
MFLAMANUAL-FR	User manual for Everest Mentor Flex, hard copy	French
MFLAMANUAL-CH	User manual for Everest Mentor Flex, hard copy	Chinese
MFLAMANUAL-JP	User manual for Everest Mentor Flex, hard copy	Japanese
MFLAMANUAL-ES	User manual for Everest Mentor Flex, hard copy	Spanish
MFLAMANUAL-KO	User manual for Everest Mentor Flex, hard copy	Korean
MFLAMANUAL-PB	User manual for Everest Mentor Flex, hard copy	Portuguese
MFLAMANUAL-PL	User manual for Everest Mentor Flex, hard copy	Polish
MFLAMANUAL-RU	User manual for Everest Mentor Flex, hard copy	Russian

Training and operating manuals

Everest Mentor Flex+ Manuals

Part number	Description	Language
MFLAMANUAL-FN	User manual for Everest Mentor Flex, hard copy	Finnish
MFLAMANUAL-HG	User manual for Everest Mentor Flex, hard copy	Hungarian
MFLCQSG	Everest Mentor Flex+ QS Guide	English
MFLCMANUAL	Everest Mentor Flex+ Manual	English
MFLCMANUAL-DE	Everest Mentor Flex+ Manual	German
MFLCMANUAL-FR	Everest Mentor Flex+ Manual	French
MFLCMANUAL-CH	Everest Mentor Flex+ Manual	Chinese
MFLCMANUAL-PB	Everest Mentor Flex+ Manual	Portuguese
MFLCMANUAL-PL	Everest Mentor Flex+ Manual	Polish
MFLCMANUAL-RU	Everest Mentor Flex+ Manual	Russian
MFLCMANUAL-FN	Everest Mentor Flex+ Manual	Finnish
MFLCMANUAL-HG	Everest Mentor Flex+ Manual	Hungarian
MFLCMANUAL-ES	Everest Mentor Flex+ Manual	Spanish
Part number	Description	
WT-1.4MMEXTMAN	1.4mm (0.055") Retrieval Kit Instruction Manual.	

Mentor Visual IQ+ Quick Start Guide

Part number	Description	Language
MVIQPQSG	Quick Start Guide, hard copy	English
MVIQPQSG-DE	Quick Start Guide, hard copy	German
MVIQPQSG-FR	Quick Start Guide, hard copy	French
MVIQPQSG-JP	Quick Start Guide, hard copy	Japanese
MVIQPQSG-ES	Quick Start Guide, hard copy	Spanish
MVIQPQSG-KO	Quick Start Guide, hard copy	Korean
MVIQPQSG-PB	Quick Start Guide, hard copy	Brazilian Portuguese
MVIQPQSG-PL	Quick Start Guide, hard copy	Polish
MVIQPQSG-RU	Quick Start Guide, hard copy	Russian
MVIQPQSG-FN	Quick Start Guide, hard copy	Finnish
MVIQPQSG-HG	Quick Start Guide, hard copy	Hungarian
MVIQPQSG-AR	Quick Start Guide, hard copy	Arabic
MVIQPQSG-CN	Quick Start Guide, hard copy	Chinese
MVIQPQSG-CZ	Quick Start Guide, hard copy	Czech
MVIQPQSG-IT	Quick Start Guide, hard copy	Italian
MVIQPQSG-NL	Quick Start Guide, hard copy	Dutch
MVIQPQSG-SV	Quick Start Guide, hard copy	Swedish
MVIQPQSG-TR	Quick Start Guide, hard copy	Turkish

Regional offices

Asia

China

No. 8 Xi hu Road,
Wu jin high-tech zone Changzhou,
Jiang Su 213164 China
custsvchina@bakerhughes.com
wgcustcare.cn@bakerhughes.com
+86 800 915 9966 (toll-free)
+86 (0) 21-3877 7888

Japan

4-16-13 Tsukishima Chuo-ku,
Tokyo 104-0052,
Japan
custcare.jp@bakerhughes.com
wgcustcare.jp@bakerhughes.com
service.itsv_jp@bakerhughes.com
+81 442 67 7067

Singapore

10 Lok Yang Way
Singapore 628631
custcare.au@bakerhughes.com
custcaremckorea@bakerhughes.com
custcaresea@bakerhughes.com

Middle East

Mussafah Industrial Area,
Sector : MW-4, Plot: 13A1-A, Str 16th,
Abu Dhabi- United Arab Emirates.
PO Box 47513
custcare.inspectionmea@bakerhughes.com
waygate.mea@bakerhughes.com
+971 48211794

India

A/78-1, Chakan MIDC Phase II,
Village Vasuli, Tal-Khed,
Pune 410501,
Maharashtra, India
cc.it.india@bakerhughes.com
waygate.india@bakerhughes.com
+91 2261595872

Americas

United States

721 Visions Drive
Skaneateles, NY 13152
customer.care@bakerhughes.com
waygate.usa@bakerhughes.com
+1 866 243 2638

Brazil

Rod. Jorn. Francisco Aguirre
(SP 101-Km 3,8)
Campinas - SP - Brasil
CEP 13064-654
cc.inspection.brasil@bakerhughes.com
waygate.latam@bakerhughes.com
+55 11 3612-0710

Europe

Germany

Robert Bosch Strasse 3
50354 Huerth
cc.rvi.de@bakerhughes.com
+49 2233 601102

Waygate Technologies, a Baker Hughes Business has sales and service offices all over the world. Below are some of our locations.

Visit www.waygate-tech.com

- Berchem, Belgium
- Alzenau, Germany
- Leicestershire, United Kingdom
- Moscow, Russia
- Bucharest, Romania
- Prague, Czech Republic
- Stockholm, Sweden
- Milan, Italy
- East Perth, Australia
- Singapore
- Dubai, UAE
- Buenos Aires, Argentina
- Mexico City, Mexico
- Airdrie, Alberta, Canada
- Toronto, Ontario, Canada
- Montreal, Quebec, Canada

