

# PLC2-N Spec-sheet



## NB IoT – Cat-M1 Operated Low Power Level Transmitter for Corrosive Liquid Media

- Compatible with most standard communication Protocols (UDP, LwM2M, MQTT, NIDD, etc.)
- Wide range of industrial applications
- High accuracy
- Designed to meet outdoor applications
- Long-term durable performance in harsh environment
- Ultra-low power
- Suitable for corrosive liquids



## TECHNICAL SPECIFICATION

### Sensor

• Range:	3, 5, 10 (or other ranges up to 200)	m H <sub>2</sub> O
• Accuracy: (combined linearity, hysteresis, repeatability)	±0.25 (typ.)	%Span
• Resolution:	±0.01	%Span
• Pressure reference:	Vented Gauge	
• Temperature Coefficient of Zero:	≤±0.03	%FS/°C
• Temperature Coefficient of Span:	≤±0.03	%FS/°C
• Long term stability (1 year):	≤ 0.2	%Span
• Overload Protection:	150	%FS
• Load Cycles (Zero to Full Scale):	10+	Million
• Storage / Operation Temperature:	-20 ~ +85	°C
• Compensated temperature:	0 ~ 60	°C

### Power

• Power Supply:	Built-in Replaceable Lithium Battery, External Power (option)
• Rated Voltage	3.6 V
• Battery Lifetime:	Typ. 50,000+ readings / 10,000+ transmission (connected to ellenex platform and standard network quality)

### Physical Specification

• Materials:	Body: Hastelloy or PVDF, Diaphragm: Hastelloy or Ceramic (Al <sub>2</sub> O <sub>3</sub> ), Enclosure: ASA/ POM, O-ring: FKM/ FFKM
• Process Connection:	No Process Connection (or on request)
• Weight:	~1,300 (for 3m range) g
• Protection Rate:	IP66 and UV protected enclosure and IP68 sensor head

### Communication

• SIM Card Type	4FF Nano-SIM, from any Network Provider
• Firmware Update:	Over The Air, Locally via wireless connectivity
• Sampling Period:	Configurable via downlink (default 4 hours)
• Power Consumption:	Power Saving: < 5uA, Transmission: < 220mA

• Communication Standards	Cat-NB1 (NB-IoT) Cat-M1 (option of back support by GPRS)
• Communication Bands	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28 and B39
• Data Rates:	Cat-M1: 375Kbps (DL)/375Kbps (UL) NB-IoT: 32Kbps (DL)/70Kbps (UL)
• TX Power:	23dBm
• Min Receiver Sensitivity:	Cat-M1: -107dBm NB-IoT: -113dBm
• Antenna:	Internal (Default)/ External (customised options available)
• Optional Features:	<ul style="list-style-type: none"> <li>• Attach without PDN (Packet Data Network)</li> <li>• Support for IPV6</li> <li>• SMS communication</li> <li>• Mobility support (Cat-M1 only)</li> </ul>

## NETWORK CONNECTION AND VISUALISATION

### Network Integration

Pre-configured or configurable to all main narrow band networks (3, A1, AT&T, China Mobile, DU, Etisalat, KPN, M1 Singapore, Optus, Orange, Proximus, Spark, Sprint, Swisscom, Telefonica, Telstra, T-Mobile, Verizon, Vodafone, 1NCE, Emnify and any other network)

### Visualization and Data Management

Ellenex white label microservice platform and Integratable to all main IIoT platforms directly or through the API (AWS, Azure, PTC ThingWorx, Bosch IoT, Cisco Jasper & Kinetic, Sierra Numerex, MathWorks ThingSpeak, GE Digital Predix, LandisGyr, Siemens MindSphere, Cumulocity, myDevices, Ubidots, TagoIO, HPE IoT and any other major IoT platform).

### Ellenex Platform Main Features

- Encrypted ultra-low power communication protocol
- Advanced device inventory
- Integration APIs for enterprise systems
- Multi-tenant role-based access control
- Data export and import
- White-label platform for enterprise runs on private account
- Variable alarm setting for high and low thresholds and multi-channel alerting
- Sampling and transmission interval configuration
- Transmission condition configuration
- Other configurations and customization available on request



Encrypted & ultra-low power



Integratable



Dynamic alerting



Multi-tenant




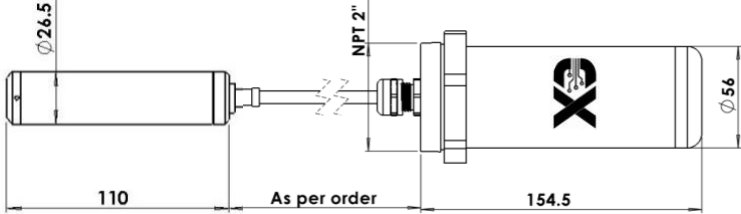

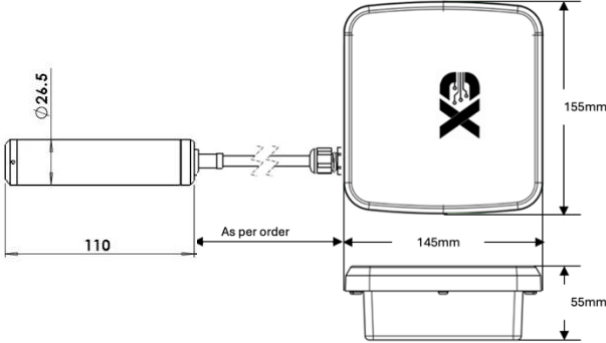
Scalable



Composable & API first

# PLC2-N Spec-sheet

## MODEL GUIDE

Model	Options:
<p>C Model:</p> 	 <p><b>IP66 sensor head, connected to IP66 POM enclosure with on/off switch</b></p>
<p>E Model:</p> 	 <p><b>IP68 sensor head, connected to IP65 ASA enclosure and on/off switch</b></p>

## INDUSTRIES



Water & Wastewater



Agriculture & Farming



Oil & Gas



Marine & Oceanography



Mining & Construction



Smart Building



Transport & Logistics



Food & Beverage



Hydraulic Oil Storage

## APPLICATIONS

- Chemical Tanks
- Liquid Delivery Systems
- Water Resources Level
- Flood monitoring
- Diesel Tank
- Liquid Storage
- Hydraulic Containers
- Wastewater Tank

# PLC2-N Spec-sheet



## ORDERING CODE

PLC2-N									
Communication Type									
B: NB-IoT					C: Cat-M1				
Measurement Range									
1, 3, 10, 20, 50, 100, 200m H <sub>2</sub> O (or any other non-standard range)									
Sensor Head Material									
H: Hastelloy diaphragm and process connection				C: ceramic diaphragm with PVDF process connection			Others		
Cable Material									
U: Polyurethane			T: Teflon coated			Others			
Cable Length									
S: same as measurement range or 1m extra							Others		
Enclosure									
E: Rectangular Enclosure					C: Cylindrical Enclosure				
Device Activation									
S: on/off switch					X: No switch (always on)				
Antenna									
I: Internal				E: External					
Options									
(On request) <sup>1</sup>									
PLC2-N	B	3m	H	T	S	E	S	I	

### Sample Product Code:

- **PLC2-N-B-3m-H-T-S-E-S-I**

NB IoT corrosive resistance level sensor, measurement range of 3m H<sub>2</sub>O, with Hastelloy sensor head and Teflon coated cable and rectangular enclosure, activated by on-off switch and internal antenna.

### <sup>1</sup>) Product Options:

- **EPB:** sensor with external power supply connector for 12V supply with internal battery backup (only for E type enclosure, adaptor is not included)
- **HG:** high-gain external antenna
- **HCB:** high-capacity battery (only for E type enclosure)

