


SD6501



Compressed air meter

SDN12DGXFRKG/US-100

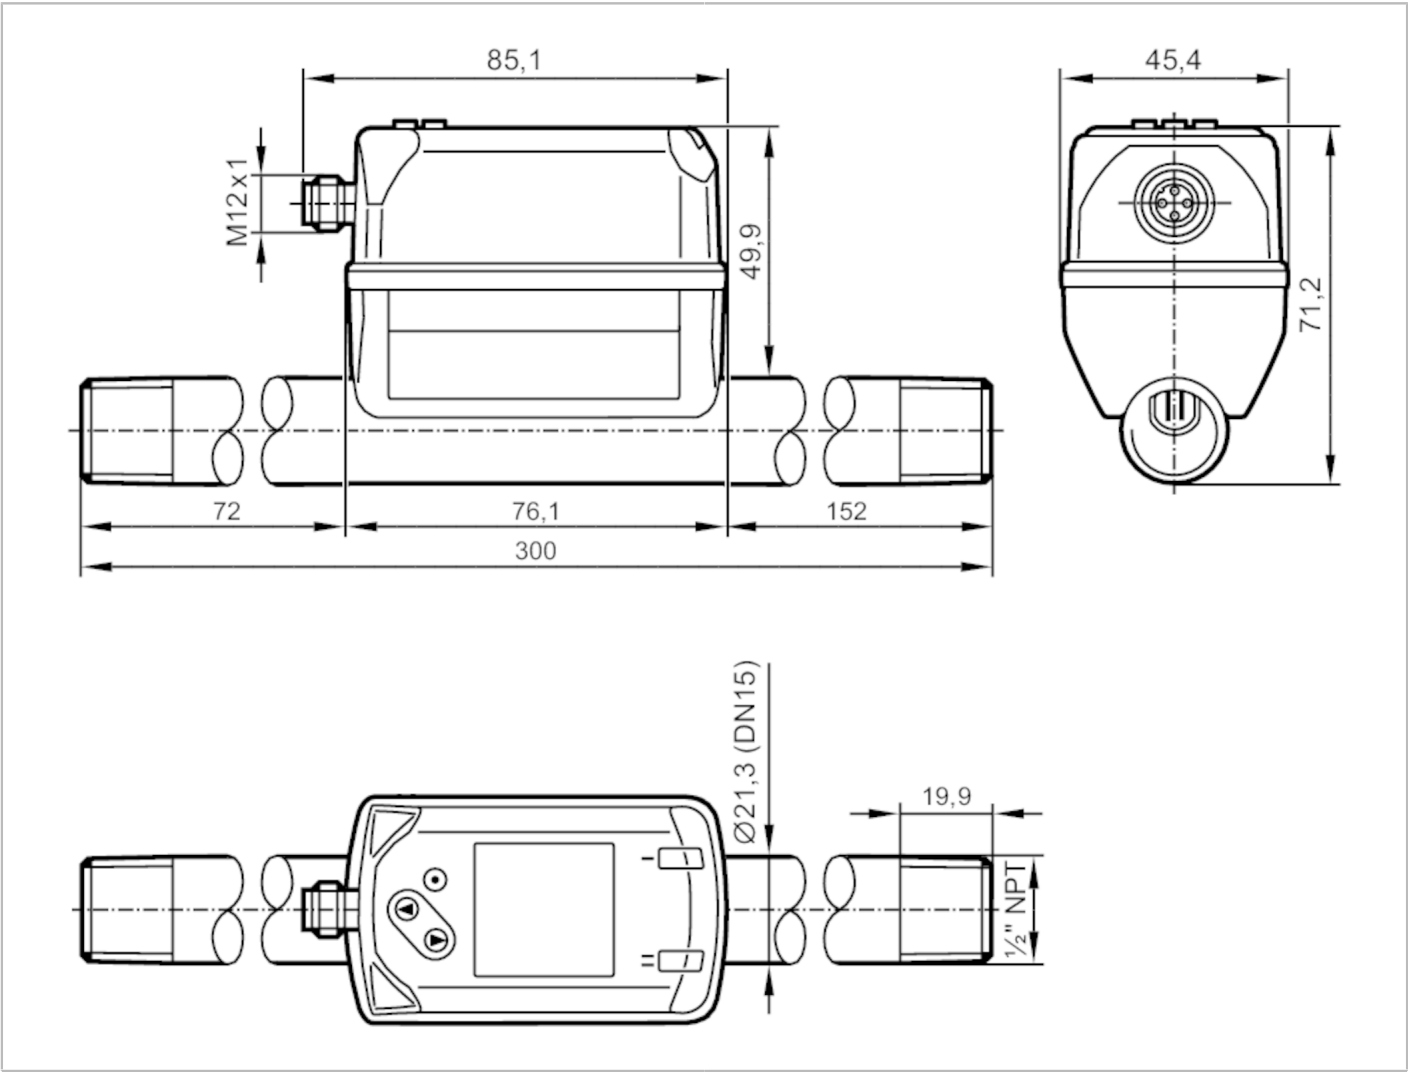

CRN



DNV
DNV.COM/AF

IO-Link



UK
CA

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1		
Measuring range	8...2648 scfh	0.15...44.15 scfm	1...327.4 ft/s
Process connection	threaded connection 1/2" NPT external thread DN15		

Application

Application	for industrial applications	
Media	compressed air	
Medium temperature [°F]	14...140	
Min. bursting pressure [psi]	928	
Pressure rating [psi]	232	
MAWP for applications according to CRN [bar]	9.7	

Electrical data

Operating voltage [V]	18...30 DC; (to SELV/PELV)
Current consumption [mA]	< 80
Protection class	III



Compressed air meter

SDN12DGXFRKG/US-100

Reverse polarity protection	yes
Power-on delay time [s]	1

Inputs / outputs

Total number of inputs and outputs	2; (configurable)
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1

Outputs

Output signal	switching signal; analogue signal; pulse signal; IO-Link; (configurable)
Electrical design	PNP/NPN
Number of digital outputs	2
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	150; (per output)
Number of analogue outputs	1
Analogue current output [mA]	4...20; (scalable)
Max. load [Ω]	500
Pulse output	consumed quantity meter
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Measuring/setting range

Measuring range	8...2648 scfh	0.15...44.15 scfm	1...327.4 ft/s
Display range	0...3178 scfh	0...52.95 scfm	0...393 ft/s
Resolution	2 scfh	0.05 scfm	0.2 ft/s
Set point SP	23...2648 scfh	0.38...44.13 scfm	2.8...327.3 ft/s
Reset point rP	10...2635 scfh	0.16...43.91 scfm	1.2...325.7 ft/s
Analogue start point ASP	0...2119 scfh	0...35.31 scfm	0...261.9 ft/s
Analogue end point AEP	530...2649 scfh	8.83...44.14 scfm	65.5...327.4 ft/s
Low flow cut-off LFC	3...28 scfh	0.05...0.47 scfm	0.4...3.5 ft/s
In steps of	1 scfh	0.01 scfm	0.1 ft/s

Pressure monitoring

Measuring range [psi]	-15...232
Display range [psi]	-15...290
Resolution [psi]	1
Set point SP [psi]	-13...232
Reset point rP [psi]	-15...231
Analogue start point [psi]	-15...186
Analogue end point [psi]	32...232
In steps of [psi]	1

Volumetric flow quantity monitoring

Measuring range	0...100000000 m³	0...353146667.2 scf
Display range	0...100000000 m³	0...353146667.2 scf
Set point SP	0.001...10000000 m³	0.05...353146667.2 scf



Compressed air meter

SDN12DGXFRKG/US-100

Pulse value	0.001...10000000 m³	0.05...353146667.2 scf
In steps of	0.0001 m³	0.005 scf
Pulse length [s]	0.002...2	
Temperature monitoring		
Measuring range	-10...60 °C	14...140 °F
Display range	-24...74 °C	-11.2...165.2 °F
Resolution	0.2 °C	0.5 °F
Set point SP	-9.7...60 °C	14.6...140 °F
Reset point rP	-10...59.7 °C	14...139.4 °F
Analogue start point	-10...46 °C	14...114.8 °F
Analogue end point	4...60 °C	39.2...140 °F
In steps of	0.1 °C	0.1 °F
Accuracy / deviations		
Temperature coefficient [1/K]	± 0,07 % MW	
Accuracy (in the measuring range)	class 141: ± (2 % MW + 0,5 % MEW); class 344: ± (6 % MW + 0,6 % MEW) ; air quality to ISO 8573-1:2010; at medium temperature 73 °F	
Repeatability	± (0,4 % MW + 0,1 % MEW)	
Pressure monitoring		
Repeatability [% of the final value]	± 0,2	
Characteristics deviation [% of the final value]	< ± 0,5; (BFSL = Best Fit Straight Line)	
Greatest TEMPCO of the span [% MEW / 10 K]	± 0,3	
Greatest TEMPCO of the zero point [% MEW / 10 K]	± 0,1	
Temperature monitoring		
Accuracy [K]	± 0,5; (medium flow in the limit area of the flow measurement range)	
Response times		
Response time [s]	0.1; (dAP = 0)	
Damping process value dAP [s]	0...5	
Pressure monitoring		
Response time [s]	0.05	
Temperature monitoring		
Dynamic response T05 / T09 [s]	T09 = 0,5	
Software / programming		
Parameter setting options	hysteresis / window; normally open / normally closed; current/pulse output; display can be rotated and switched off; Display unit; totaliser	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	



Compressed air meter

SDN12DGXFRKG/US-100

Profiles	Common - I&D	
	Function	Identification and Diagnosis
		Measurement data, standard resolution
SIO mode	yes	
Required master port type	A	
Process data analogue	8	
Process data binary	2	
Min. process cycle time [ms]	7.2	
Supported DeviceIDs	Type of operation	DeviceID
	default	863
Operating conditions		
Ambient temperature [°F]	32...140	
Storage temperature [°F]	-4...185	
Max. relative air humidity [%]	90	
Protection	IP 65; IP 67	
Tests / approvals		
EMC	DIN EN 60947-5-9	
Vibration resistance	DIN EN 68000-2-6	5 g (10...2000 Hz)
MTTF [years]	183	
UL approval	UL approval no.	I012
	File number UL	E174189
Pressure Equipment Directive	Sound engineering practice; can be used for stable gases fluid group 2	
Mechanical data		
Weight [g]	731	
Housing	rectangular	
Dimensions [mm]	300 x 45.4 x 71.2	
Materials	PBT+PC-GF30; PPS GF40; stainless steel (304/1.4301); stainless steel (303/1.4305); steel (1.5523) galvanised; 2.0401 (brass / CW614N); FKM	
Materials (wetted parts)	stainless steel (304/1.4301); stainless steel (303/1.4305); FKM; ceramics glass passivated; PPS GF40; Al2O3 (ceramics); acrylate	
Process connection	threaded connection 1/2" NPT external thread DN15	
Displays / operating elements		
Display		colour display 1,44", 128 x 128 pixels
		2 x LED, yellow
Remarks		
Remarks	MW = measured value	
	MEW = Final value of the measuring range	
	Measuring, display and setting ranges refer to the standard volume flow according to DIN ISO 2533.	
	For information about installation and operation please see the operating instructions.	
Pack quantity	1 pcs.	



Compressed air meter


SDN12DGXFRKG/US-100

Electrical connection

Connector: 1 x M12; coding: A



Connection

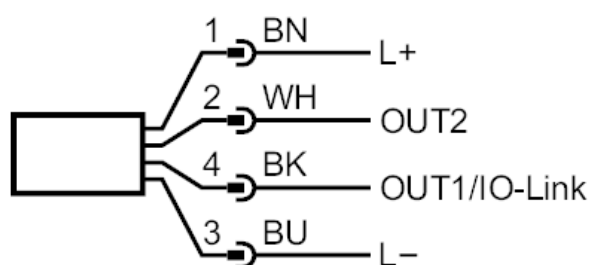

OUT1/IO-Link: switching output flow
switching output temperature
switching output pressure
Pulse output quantity meter
signal output Preset counter

OUT2/InD: switching output flow
switching output temperature
switching output pressure
analogue output flow
analogue output temperature
analogue output pressure
signal output Preset counter
Pulse output quantity meter
input counter reset