


RTD CONNECTION HEAD

STYLE RUN WITH 1/2" NPT SS NIPPLE, UNION, NIPPLE

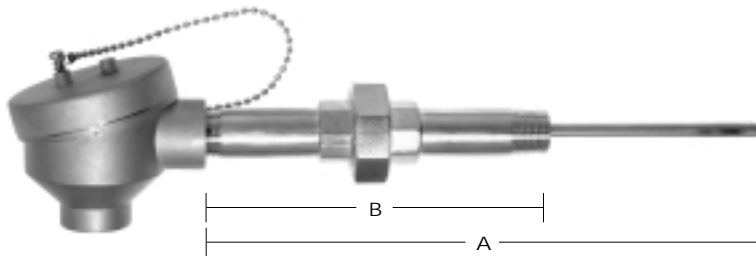

- Stainless steel sheath
- Choice of insulation determines the maximum temperature at hot end
- 100 Ω , TCR = $.00385 \Omega/\Omega/^{\circ}\text{C}$ DIN curve
- Connection heads are gasketed to seal against moisture, dust and corrosive or hostile atmospheres
- Screw covers are attached to body with a plated chain
- Covers have lugs for tightening or loosening with a screwdriver or wrench
- Connection heads are available in die-cast aluminum, stainless steel, polypropylene and nylon in standard and miniature sizes

ORDERING INFORMATION

R **U** **N** **1** **2** — **3** **4** **4** **4** — **5** **6** **6** **6** **7** — **8** **9** **9** **10**

To create an ordering code fill in the boxes above with the appropriate number and/or letter from the corresponding box below.

Box 1: Element Class

A = $\pm 0.06\%$ at 32°F (0°C), Special
B = $\pm 0.12\%$ at 32°F (0°C), Standard

Box 2: Number of Elements

1 = Single
2 = Dual (not available with 1/8" sheath)

Box 3: Number of Leads per Element

2 = 2-Wire Circuit
3 = 3-Wire Circuit
4 = 4-Wire Circuit (not available with 1/8" sheath)

Box 4: Sheath O.D. enter 3 digit code

125 = 1/8"
188 = 3/16"
250 = 1/4"

Box 5: Sheath Material

A = 304 SS
B = 316 SS

Box 6: Sheath Length "A"

fill in measurement desired

Whole inches: 01" to 99" (Lengths over 99" consult TTI)

Fractions: A = No fraction
B = 1/8"
C = 1/4"
D = 3/8"
E = 1/2"
F = 5/8"
G = 3/4"
H = 7/8"

Example: For a 10-1/4" sheath length, enter 10C into the corresponding boxes above.

Box 7: Lead Wire Insulation

G = Fiberglass ($900^{\circ}\text{F}/482^{\circ}\text{C}$)
T = Teflon ($400^{\circ}\text{F}/204^{\circ}\text{C}$)

Box 8: Connection Head*

1 = Aluminum Screw Top
2 = Aluminum Screw Top Explosion-Proof
3 = Aluminum Flip Top
4 = 316 SS Screw Top
5 = 316 SS Screw Top Explosion-Proof
6 = FDA Approved White Polypropylene
* Process and conduit opening 1/2" NPT unless otherwise noted.

Box 9: NPT Nipple Length "B"

05 = 5"
06 = 6"
07 = 7"
09 = 9"
10 = 10"
11 = 11"
13 = 13"
(For other lengths consult TTI)

Box 10: Spring-Loaded Fitting

N = Not Required
R = Required