SC-II SERIES

Current to Current Loop Powered Isolator

Features

- 4-20 mA Input (10-50 mA optional)
- 2-Wire, 4-20 mA Output (10-50 mA optional)
- Two Year Warranty
- Loop Powered
- Input & Output LED Indicators
- Various Mounting Styles



Description:

The SC-II loop powered isolator is a signal conditioner whose function is to provide a retransmitted, galvanically isolated 4-20 mA output signal in response to isolated 4-20 analog input.

The loop powered isolator may be applied in a similar manner as a conventional two wire transmitter.

The SC-II appears to the input loop as a series shunt resistor. A small sense resistor is used to measure the input current. The input loop derives it's power from the input current loop.

This input current signal is then scaled and converted to a 0 to 10,000 Hz frequency signal by a Current to Frequency Converter. This frequency signal is then transmitted across an optoisolator to the output stage.

The output stage derives it's power from the output current loop. The output stage converts the 0-10000 Hz frequency signal into a current flowing in the output loop equal to that flowing in the input current loop.

The 10-50 mA range options are provided to enable the unit to perform range conversions as well as signal isolation.

Specifications:

Analog Input

Available Ranges: 4-20 mA (10-50 mA optional)

Input Type: Two Wire, Loop Powered

Equivalent Input Impedance: 525 Ω on 4-20 mA range

210 Ω on 10-50 mA range

Operational Range: 3.5-33 mA

Over Current Protection: 2.5 times rated span

Reverse Polarity Protection Isolation Voltage: 500 V

Input Loop Indicator: LED illuminates when loop is pow-

ered by proper polarity

Analog Output

Accuracy: ± 0.10% Span

Output Type: Two Wire, Loop Powered Range: 4-20 mA (10 - 50 mA optional) Compliance Voltage: 10 to 40 VDC

Loop Burden: < 10 VDC Trim Controls: Zero & Span Linearity: < ±0.10% Span

Output Voltage Effect: < ± 0.002% Span/Volt

Temperature Effect: < 200 PPM/C° Reverse Polarity Protected Noise Content: < 0.2% Span

Overcurrent Limiting: 35 mA
Output Loop Indicator: LED illuminates when output loop

is powered by proper polarity

Mounting Styles

DIN Rail Mount: Plastic enclosure with a snap fastener for

fitting to DIN 46 277 and DIN EN 50 022

assembly rails.

NEMA 4: 4.92" x 4.92" NEMA 4 Enclosure for wall

mounting.


Explosion Proof: Aluminum enclosure for:


Class I, Division 1, Groups B, C & D Class II, Division I, Groups E, F & G.


Listing: CE Compliant




Dimensions

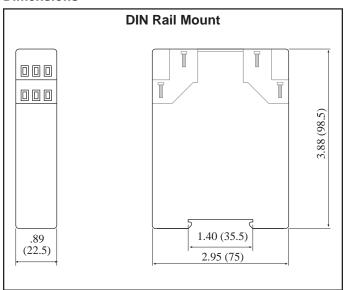

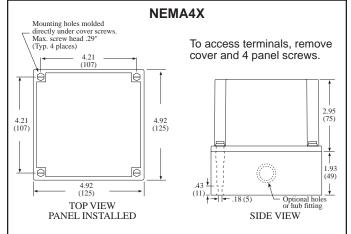


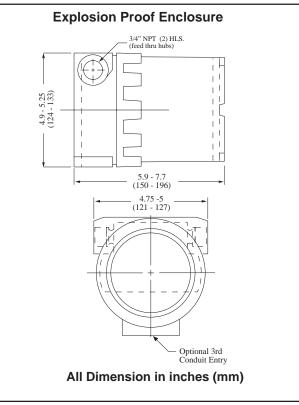


Simplified Block Diagram

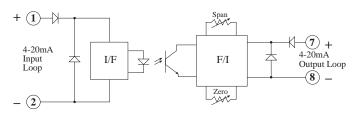

Typical Wiring Hookup

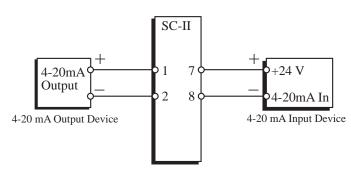

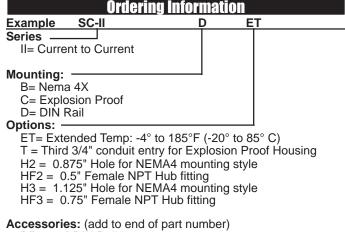

DR-4= 4" DIN Rail