

Model 1500

Portable Chilled Mirror Dew/Frost Point Hygrometer

A self-contained portable, multi-function hygrometer that accurately and reliably measures the moisture content in gases, with the battery life and ruggedness required for field use.

The Model 1500 is a drift-free, low maintenance hygrometer featuring high durability, NIST traceable certification and ease of use. Its primary method chilled mirror sensor provides precision dew/frost point temperature measurement in a robust, transportable package.

Simply attach the sample line, adjust the flow with the integral flow meter and turn on the power. Within minutes you will be collecting field dew/frost point data with the same chilled mirror accuracy of a laboratory standard hygrometer. With a nominal battery life of 12 hours, you will be able to collect data for the entire shift or spot check your processes for several days without recharging.

The Model 1500 is highly regarded by calibration technicians and manufacturing personnel for its quick dry down, fast response and long life. It can be fitted with a precision air temperature sensor and pressure transducer, and either locally or remotely mounted Edgetech Instruments D-Probe or S-Series chilled mirror sensors.

All Edgetech Instruments hygrometers are manufactured, calibrated and supported in the USA in a modern, ISO 9001:2008 certified facility and calibrated in an ISO/IEC 17025:2005 accredited calibration laboratory. All calibrations are traceable to NIST.

Features:

- Primary method sensor provides absolute knowledge of dew/frost point temperature
- Automatic Balance Control mode provides automatic correction for optics contaminants
- Temperature measurement option for live relative humidity measurement
- Pressure measurement option for live parts per million by volume measurement
- Current or voltage outputs, RS-232 optional
- User programmable alarm functions
- Internal vacuum pump to pull sample



The Edgetech Instruments Model 1500

Applications:

- Ambient air
- Glove boxes
- HVAC ducts
- Environmental test chambers
- Dry air circulation pipes
- Refrigerated storage rooms
- Engine test rooms

www.edgetechinstruments.com



Edgetech Instruments

ISO/IEC 17025:2005 Accredited
ISO 9001:2008 Certified

Technical Specifications

Sensor Type:

Primary method chilled mirror dew/frost point sensor

Sensor Options:

The remotely mounted D-Probe insertion sensors are air cooled with two stages.

The S-Series flow through sensors are available in both locally and remotely mounted configurations with either two or three stages. Note: Units fitted with S3 sensors are AC powered only.

Measurement and Performance:

Dew/Frost Point Measurement Ranges:

- Two-Stage DS2: -4 to 122°F (-20 to 50°C) air cooled
 - Two-Stage DX2: -40 to 122°F (-40 to 50°C) air cooled
 - Two-Stage S2SC: -40 to 122°F (-40 to 50°C) fan cooled
 - Three-Stage S3: -76 to 122°F (-60 to 50°C) fan cooled
 - Three-Stage S3: -103 to 122°F (-75 to 50°C) liquid cooled
- Air/fan cooled sensor performance at 25°C ambient and 1 Atm.

Accuracy:

Dew/Frost Point: +/- 0.36°F (+/- 0.20°C)

Functional:

Power Charger:

115-230 VAC, 50-60 Hz

Operating Temperature:

32 to 122°F (0 to 50°C)

Sample Connection:

¼ inch compression fitting

Sample Flow Rate:

0.5 to 5 SCFH;
Integral flow meter and control valve standard with S-Series sensors

Sample Pressure:

0 to 150 psig;
Higher pressures available, consult factory



The Edgetech Instruments Model 1500

Output: Digital:

RS-232, Optional

Output: Analog:

4 to 20 mA or 0-5 VDC; -50 to 50°C or
-75 to 75°C dew/frost point span

Compliance:

9.0 VDC, 450 ohms

Display:

Red LED, 0.5" tall; 8 digit alphanumeric

Alarm:

Visual: Flashing "ALARM" message

Relay:

1 Form C, non-latching
10A at 240 VAC, 8A at 24 VDC, 1/2 HP at
240 VAC

Dimensions:



14.75" H x 18" W x 7" D

Weight:

24 lbs.

Enclosure:

Plastic carrying case

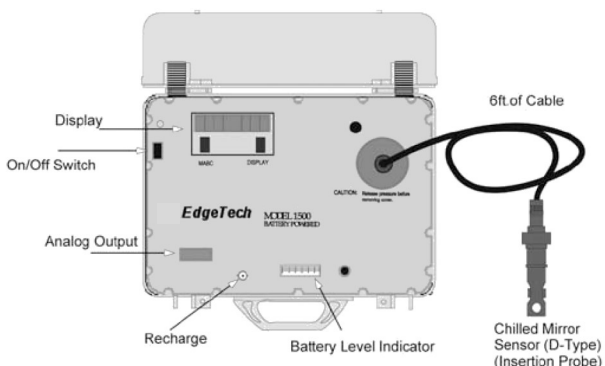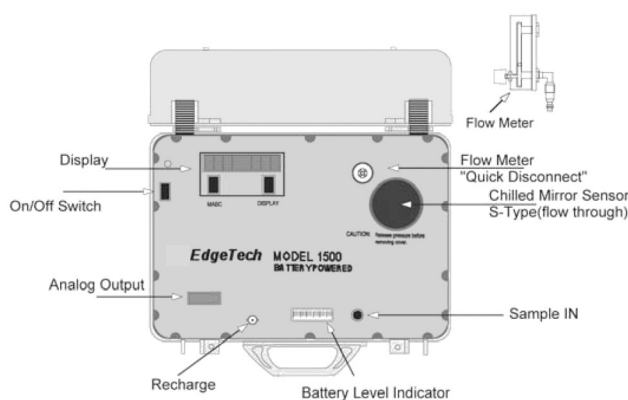

Toll Free: 800-279-3729 Ph: 508-263-5900 Fax: 508-486-9348

E-mail: h2o@edgetechinstruments.com

Web: www.edgetechinstruments.com

 **Edgetech Instruments**

ISO/IEC 17025:2005 Accredited
ISO 9001:2008 Certified