



LHC 400 Advance

Temperature dry well calibrator LHC 400 Advance is an equipment suitable for all conditions and applications, covering different kind of industries. The LHC 40 Advance is the most advanced equipment in its class. Designed to work in a few minutes, as a dry block with different inserts. Thanks to the wide variety of inserts available, it allows you to calibrate any probe or thermocouple. The LHC 40 Advance has a temperature range of 40 ... 450 °C (104 ... 842 F) stability of 0.04 °C (32,07 F) accuracy of 0.1 °C (0.18 F).



APPLICATIONS

Calibration Laboratories

Testing Labs

Universities / R & D

Chemical / Pharmaceutical Industry

Suitable use in the food industry

Easy maintenance and service

HIGHLIGHTS

Fast Response Time

Temperature range 40 ... 450 °C / 104 . 842 F

Dry block with a big diameter 60 mm

Easy change between the calibration functions

Immersion Depth: 165 mm

Resolution: 0,1/0,01/ 0,001 °C / F

Stability: 0.04 °C / 32,07 F

Accuracy: 0.1 °C / 0.18 F

Uniformity: 0.03 °C / 0.054 °F

Portable unit

3 Years Warranty

General Information

Easy and intuitive 4.3-inch touch screen user interface
Dry block, blackbody, surface and different inserts
Intuitive handling of calibration functions
Robust against damage
Trend graph with resolution up to 0.1°C and time selection
Program functions with up to 8 segments
Multi-language Spanish, English, German, French, Italian
RS485 ModBus RTU communication (DB9 connector)
World-class performance

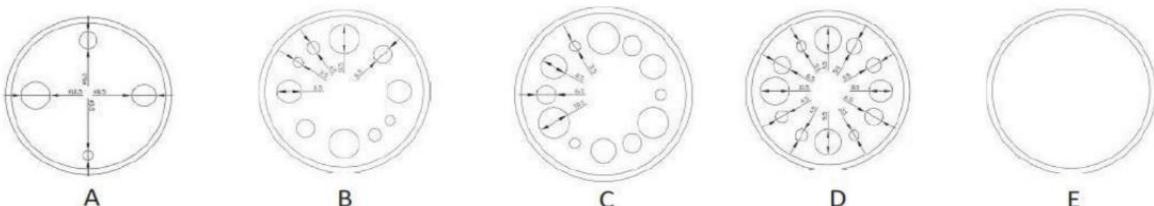


Technical Data

Operating Temperature Range(°C)	40...450 °C* /104 ... 842 F
Accuracy	0,1 °C /0,18 F
Resolution	0.1/ 0.01/ 0.001°C / F (selectable).
Reference temperature sensor	Internal
Calibration Volume	Ø 60mm x 190 mm
Warm-Up time	From 50 ... 425 °C / From 104 ... 797 F: 22 Minutes
Cooling time	From 425 ... 100 °C /From 797 to 212 F: 35 Minutes
Housing and assembly	Portable
Dimensions An x La x Al (cm)	250 x 370 x 440 mm
Weight (kg)	10.8 kg Approx.
Supply	100 ... 234 Vac 50/60 Hz
Power Consumption	Approx 1800 W

DRY BLOCK

Temperature Stability	±0.04 °C / ± 32.07 F
Uniformity	±0.03 °C / ± 0.07 F
Insert Dimensions	59.5mm x 165mm
Optional Inserts	
1 x Ø 3,5 /1 x Ø 6,5/ 1 x Ø 8,5/ 1 x Ø 10,5 mm	
2 x Ø 3,5 /2x Ø 4,5/ 2 x Ø 6,5/ 2 x Ø 8,5/ 2 x Ø 10,5 mm	
3 x Ø 3,5 /3x Ø 6,5/ 3 x Ø 8,5/3 x Ø 10,5 mm	
2 x Ø 3,5 /1x Ø 4,5/ 1 x Ø 5,0/1 x Ø 5,5/1 x Ø 6,5/ 1 x Ø 8,5	
/1x Ø 9,0/ 1 x Ø 9,5/1 x Ø 10,5 mm	
Blank insert without holes or Custom	
Infrared calibration insert with external reference sensor Ø 3 mm T ^a 50 ... 450 °C	
Surface calibration insert Temp range Rango 50 .. 400 °C // 122 to 752 F	

**Scope of delivery**

LHC 400 Advance Basic Instrument

Estándar insert A: 1 x Ø 3,5 /1 x Ø 6,5/ 1 x Ø 8,5/ 1 x Ø 10,5 mm

Insert extractor

Power Cable EU, USA, Others.

Manufacturing Traceable Calibration Certificate 3.1 (8 Points)

Instruction Manual

3 Years of Warranty against factory defects

Optional

Trolley transport suitcase with wheels and handle.

ENAC (ISO 17025) Calibration Certificate

Several types of inserts (See the Dry Block Technical Data)